



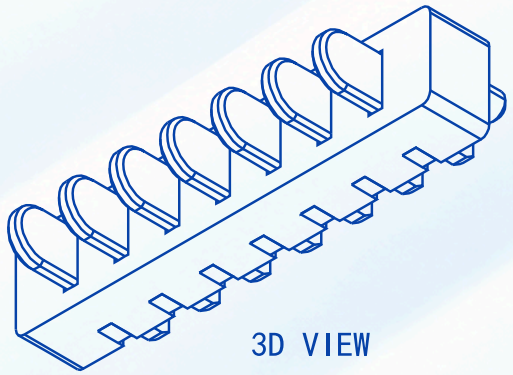


SPECIFICATIONS


1. ELECTRICAL CHARACTERISTICS:
   1-1. RATING: DC 12V 15A / Pin
   1-2. CONTACT RESISTANCE: 30mΩ
   1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
   1-4. INSULATION RESISTANCE: 500MΩ , MEASURED BY 500V DC
2. LIFE TEST:MECHANICAL LIFE TEST 5,000 CYCLES.
3. TEMPERATURE RISE : 30° C MAX

规格型号	DIM:A	DIM:B	DIM:C
ND-D30M-2Pin-R1	9.50	7.50	3.00
ND-D30M-3Pin-R1	12.50	10.50	6.00
ND-D30M-4Pin-R1	15.50	13.50	9.00
ND-D30M-5Pin-R1	18.50	16.50	12.00
ND-D30M-6Pin-R1	21.50	19.50	15.00
ND-D30M-7Pin-R1	24.50	22.50	18.00
ND-D30M-8Pin-R1	27.50	25.50	21.00
ND-D30M-9Pin-R1	30.50	28.50	24.00
ND-D30M-10Pin-R1	33.50	31.50	27.00
ND-D30M-11Pin-R1	36.50	34.50	30.00
ND-D30M-12Pin-R1	39.50	37.50	33.00

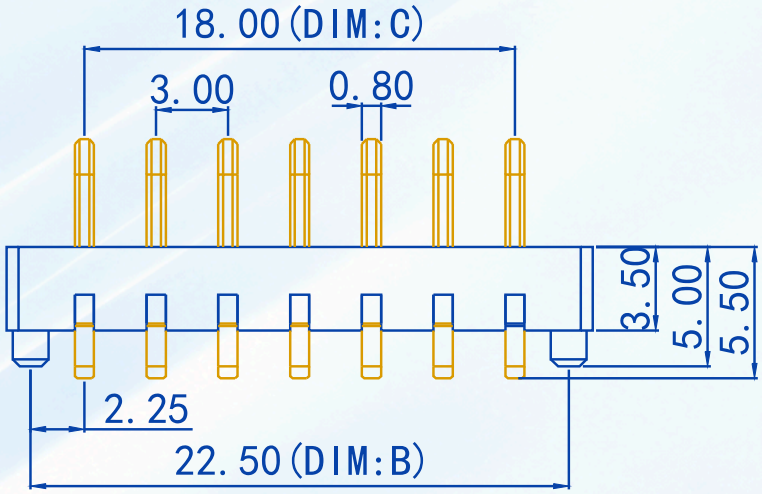

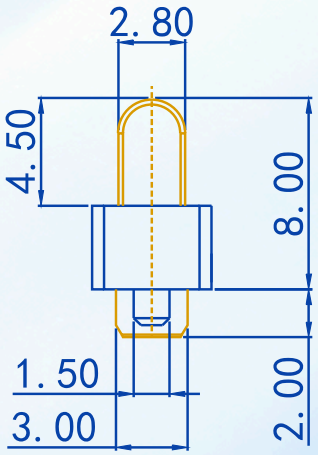

NO.	PARTS	MATERIAL	QTY.	FINISHING
2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	HIGH CONDUCTIVITY COPPER	7	Au PLATED

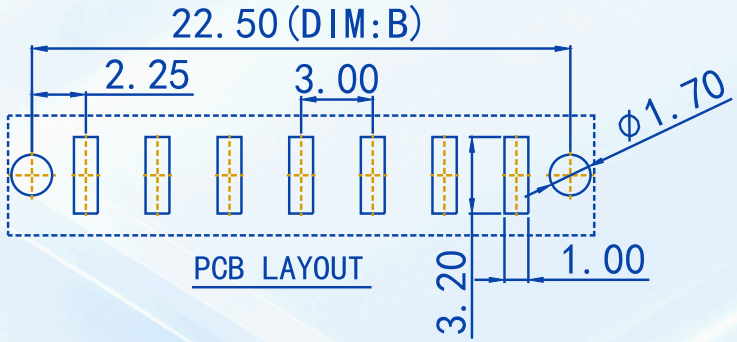

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X. ±0.15	X.° ±1°
X.X ±0.10	X.X° ±0.5°
X.XX ±0.05	X.XX° ±0.05°
X.XXX ±0.005	X.XXX° ±0.005°

DESIGN		DATE		TITLE: 电池连接器
APPROVED		DATE		
MODEL: ND-D30M-R1系列		REV:	SCALE:	UNIT: mm
		SIZE: A4	SHEET: 1/1	