


RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

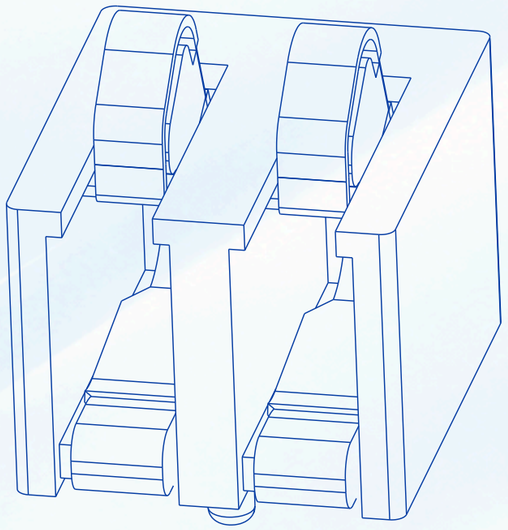


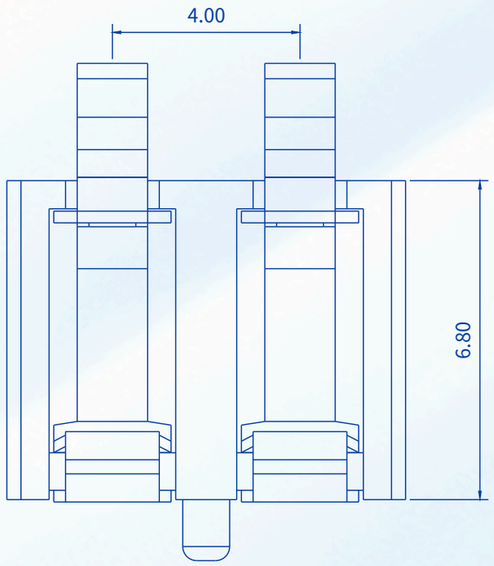

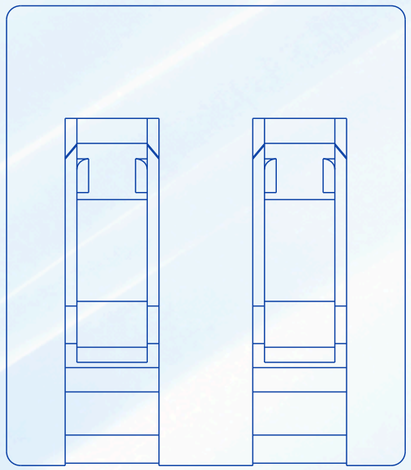

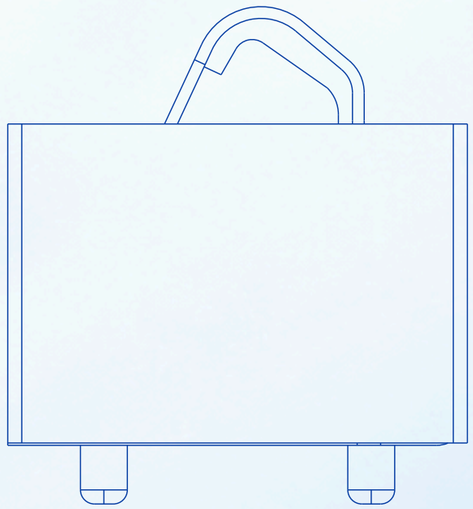

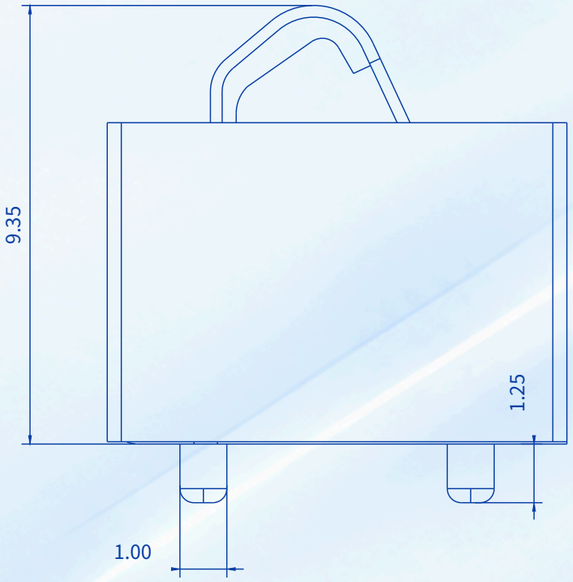

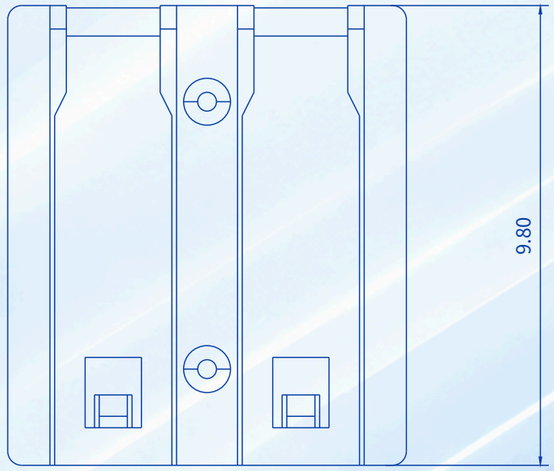

MATERIAL / SPECIFICATION	
Housing	PA46 (30% Glass Filled), black
Plunger	Brass
Barrel	Brass
Spring	SUS 304
Spring force	150g ±20gkf
Full stroke	2.5 mm
Plating	Au 3u"
Packing	Reel Tape
Surface finish	3.2

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
x.	±0.25
x.x	±0.10
x.xx	±0.03
ANGLE	±1°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	4 mm Pitch 6.8 mm Height Spring Contact Battery Connector (2 Pin) With Locating Post Top-Contact						
PART NO.	KS-PG400-02P-680P					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1