


RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

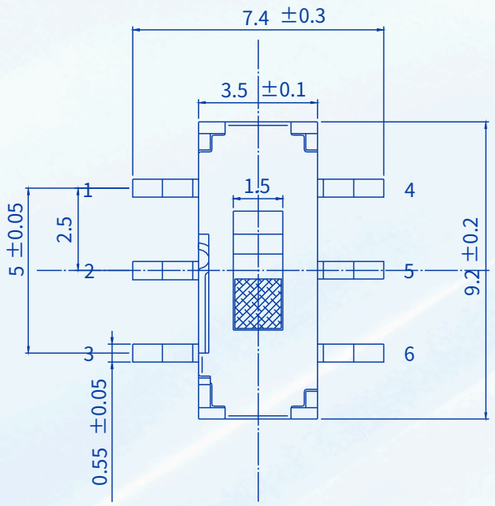


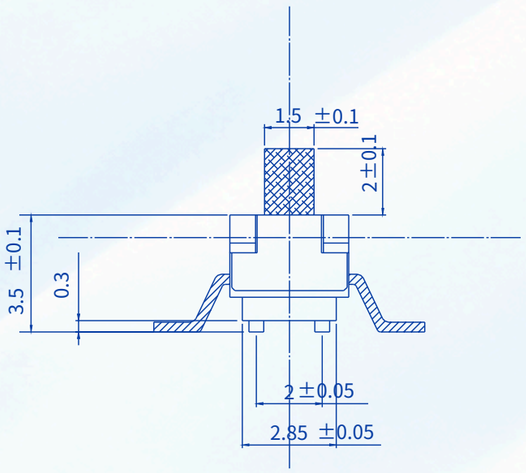


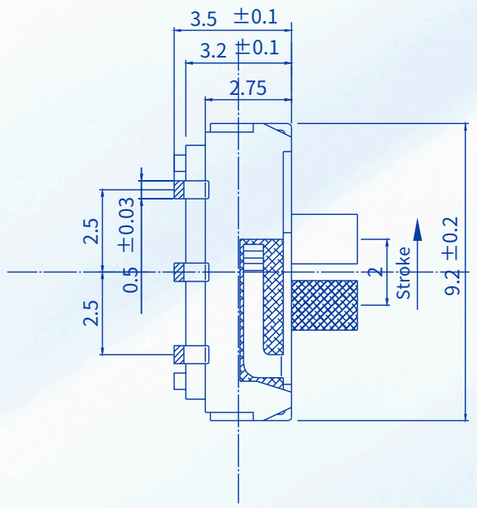

MATERIAL / SPECIFICATION	
Rated Range	50mA DC12V
Insulation Resistance	100 MΩ min (DC100V)
Dielectric Strength	AC100V (50/60Hz for 1 minute)
Mechanical Life	10,000 cycles
Operating Temperature	-10~+60°C
Operating Force	200±100gf
Material Property	Environmentally Friendly (SGS)
BOM: Cover	Qty 1; Stainless Steel; Silver White
BOM: Contact Spring	Qty 2; Silver-Clad Phosphor Bronze; Silver White Inlaid Silver
BOM: Button	Qty 1; Reinforced Nylon; Black
BOM: Base	Qty 1; P6T Brass; Black & Silver Plated

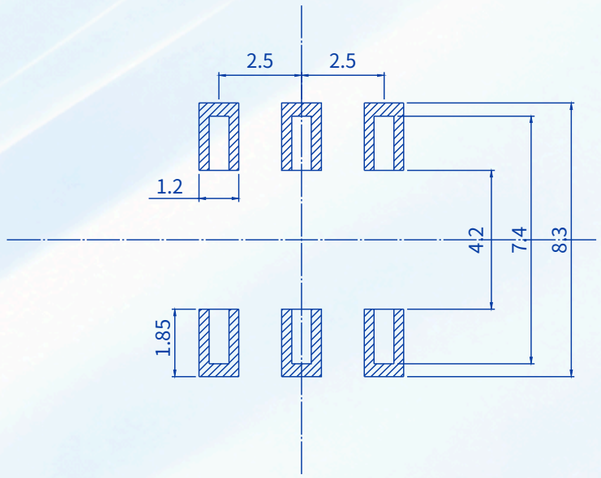

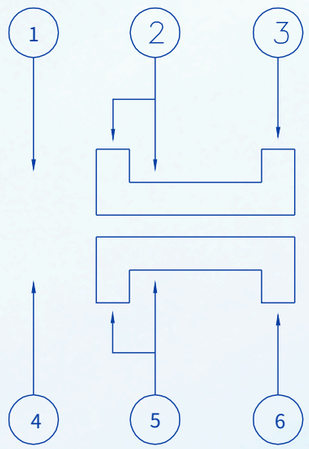

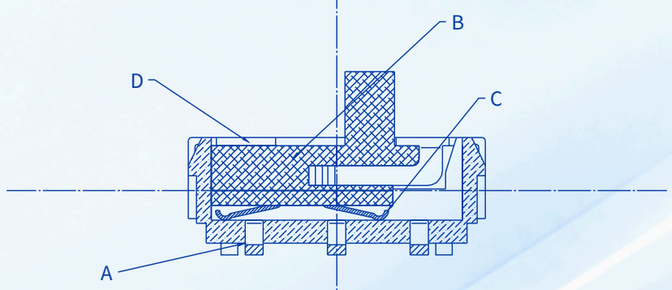

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	
		APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 6 Pin Vertical SMD							
PART NO.	KS-SS-SK-05B-7.4						REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1	