



RoHS Compliant

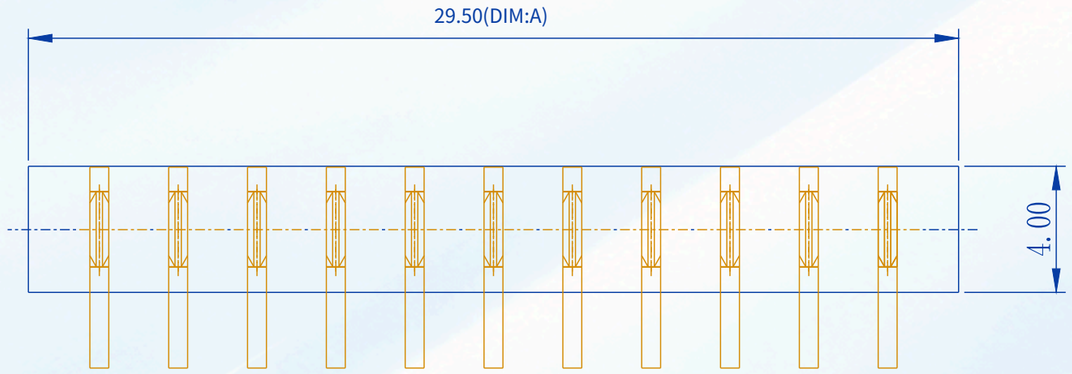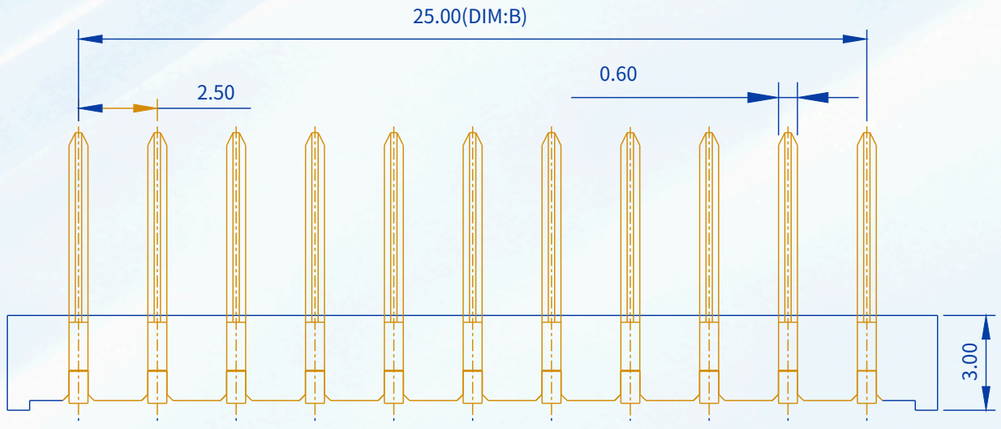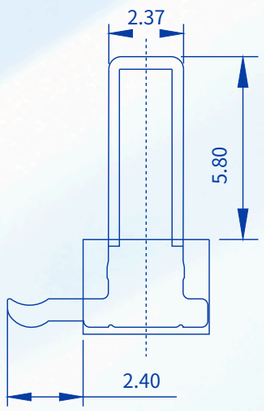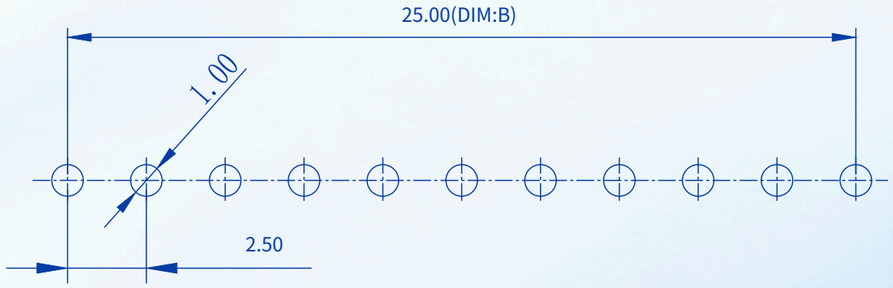


Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

## REVISION HISTORY

| REV. | DESCRIPTION | DRAWN BY | CHECKED BY | APPROVED BY |
|---|---|---|---|---|
| A0 | INITIAL RELEASE | KANGSHENG | | |

| Dimension | | |
|---|---|---|
| No. of Pins | DIM.B | DIM.A |
| 03 | 5.00 | 9.50 |
| 04 | 7.50 | 12.00 |
| 05 | 10.00 | 14.50 |
| 06 | 12.50 | 17.00 |
| 07 | 15.00 | 19.50 |
| 08 | 17.50 | 22.00 |
| 09 | 20.00 | 24.50 |
| 10 | 22.50 | 27.00 |
| 11 | 25.00 | 29.50 |

| MATERIAL / SPECIFICATION | |
|---|---|
| Insulator | Nylon 9T (UL94V-0) |
| Terminal | Phosphor Bronze |
| Terminal Plated | Gold over Nickel or Tin |
| Current Rating | 7 A |
| Instant Current | 10 A |
| Contact Resistance | 30 mΩ |
| Insulation Resistance | 100 MΩ |
| Dielectric Voltage | 500 V |
| Operating Temperature | -40° ~ 105° |

| GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED) | |
|---|---|
| X. | ±0.50 |
| X.x | ±0.30 |
| X.xx | ±0.20 |
| ANGULAR | ±2° |

PROJECTION

THIRD ANGLE PROJECTION

| | |
|---|---|
| DRAWN BY | KANGSHENG |
| CHECKED BY | |
| APPROVED BY | |

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| PRODUCT NAME | 2.5 mm Pitch 3 mm Height Right-Angle Through-Hole Male Blade Battery Connector (3–11 Pin) | | | | | | |
| PART NO. | KS-BL250-11M-RD300-NN-01 | | | | | REV. | A0 |
| SCALE | NTS | UNIT | mm | SIZE | A3 | SHEET | 1/1 |