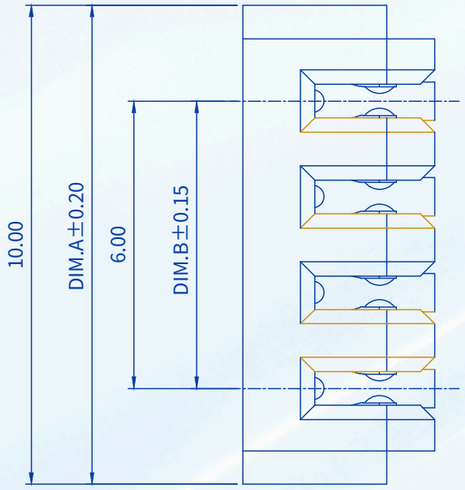
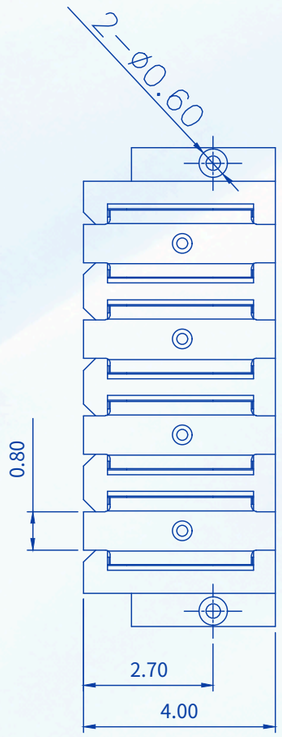
RoHS Compliant

REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		








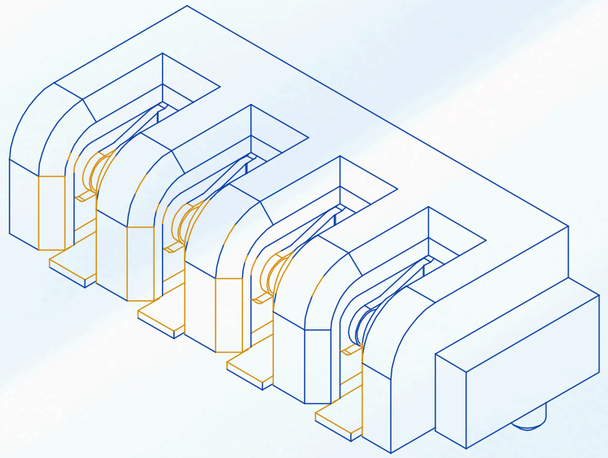


TABLE			
PIN	DIM.A	DIM.B	DIM.C
3 PIN	8.00	4.00	7.35
4 PIN	10.00	6.00	9.35
5 PIN	12.00	8.00	11.35
6 PIN	14.00	10.00	13.35
7 PIN	16.00	12.00	15.35
8 PIN	18.00	14.00	17.35
9 PIN	20.00	16.00	19.35
10 PIN	22.00	18.00	21.35

MATERIAL / SPECIFICATION	
Housing	LCP130I
Terminal	C9191-H, Gold Plated
Rated Voltage	AC/DC 30V Max
Withstanding Voltage	AC 1000V 1 Minute, No Damage
Insulation Resistance	DC 500V 1 Minute, 1000MΩ Min
Operating Temperature	-20° to +80°

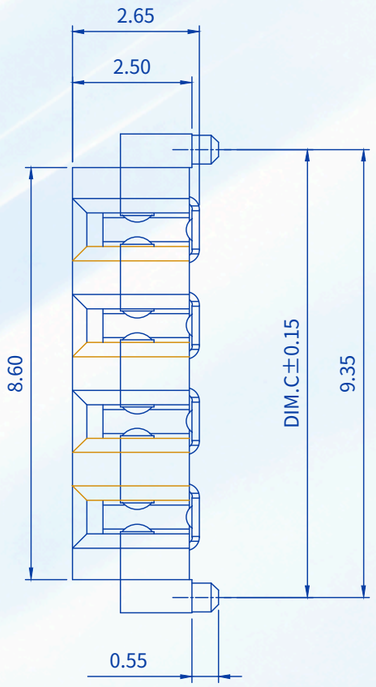

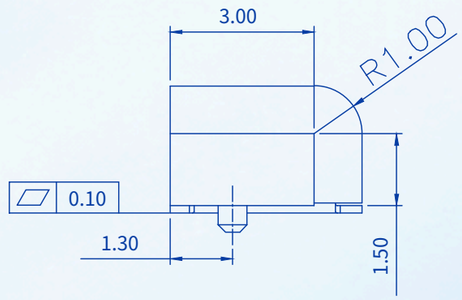

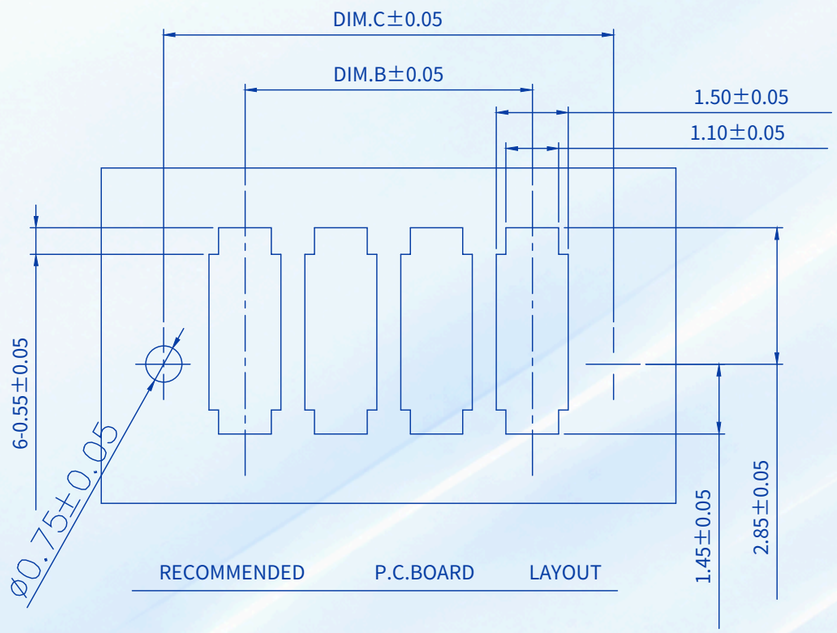

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.35
.X	±0.25
.XX	±0.15
X.°	±4°
.X°	±3°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch 2.5 mm Height SMT Female Blade Battery Connector (4 Pin) With Locating Post							
PART NO.	KS-BL200-04F-S250P-02						REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1	