
RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

MATERIAL / SPECIFICATION	
Rated Current	7.0 A (Per Pin)
Rated Voltage	AC/DC 30V Max
Dielectric Voltage	AC 1000V 1 Minute, No Damage
Insulation Resistance	DC 500V 1 Minute, 1000 MΩ Min
Operating Temperature	-40° to +85°
Insulator	PA9T, Black, Heat Resistant 260° ±5°
Contact	Brass (T=0.5 mm), Gold Plated 1u"



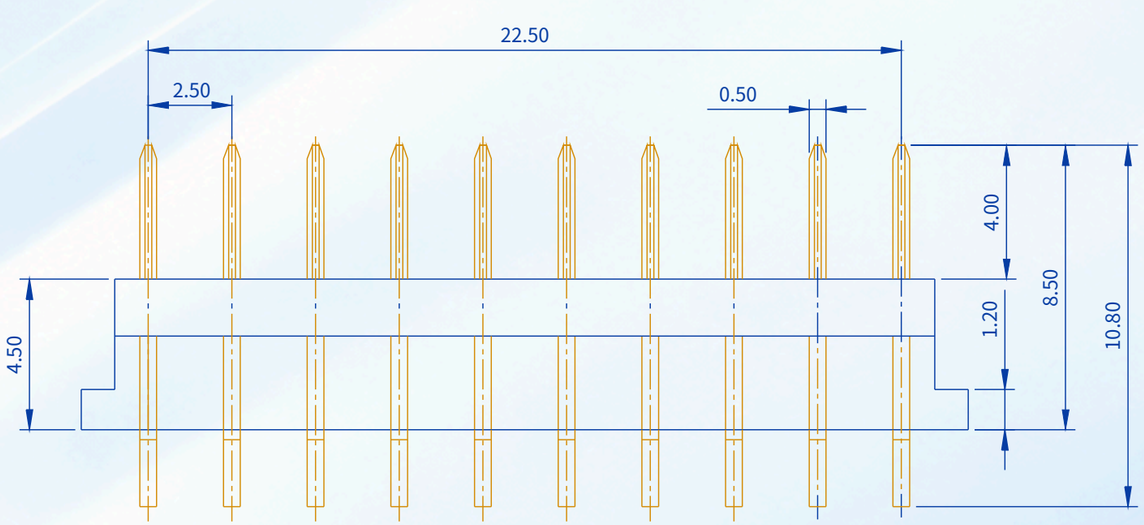

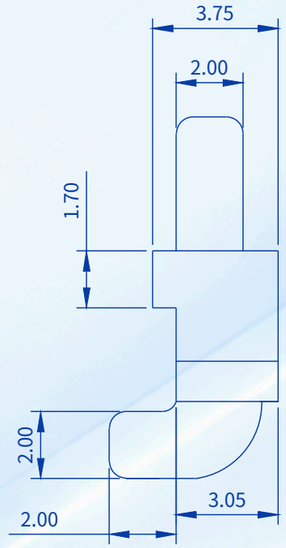

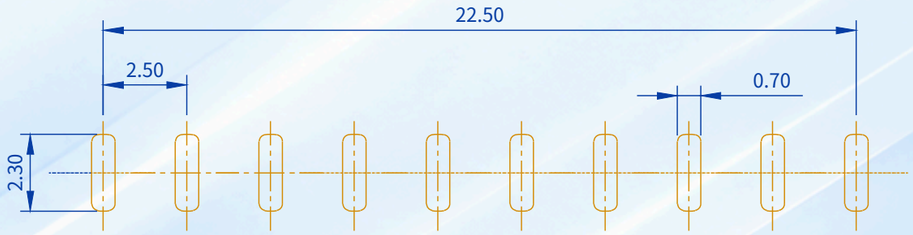


P.C.B LAYOUT

TOLERANCE: ±0.05

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
.X	±0.25
.XX	±0.15
.XXX	±0.05

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.5 mm Pitch 3.75 mm Height Right-Angle Through-Hole Male Spring Contact Battery Connector (10 Pin) Recessed Mount						
PART NO.	KS-BL250-10M-RD375J					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1