

RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		




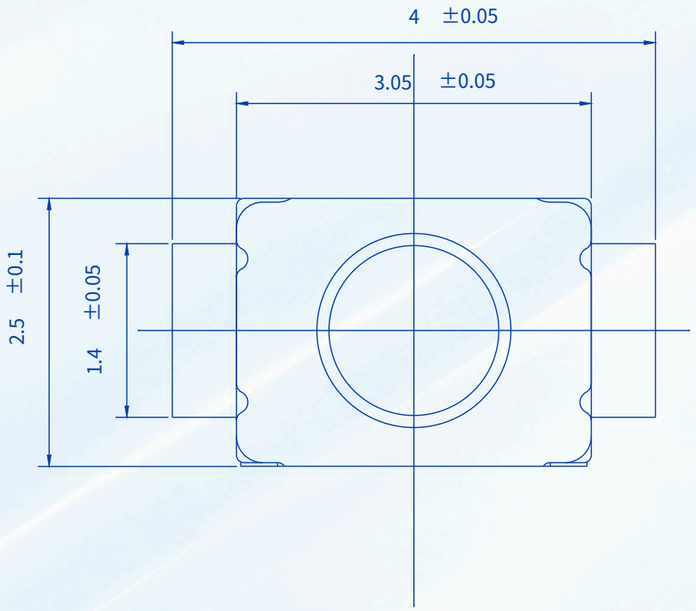

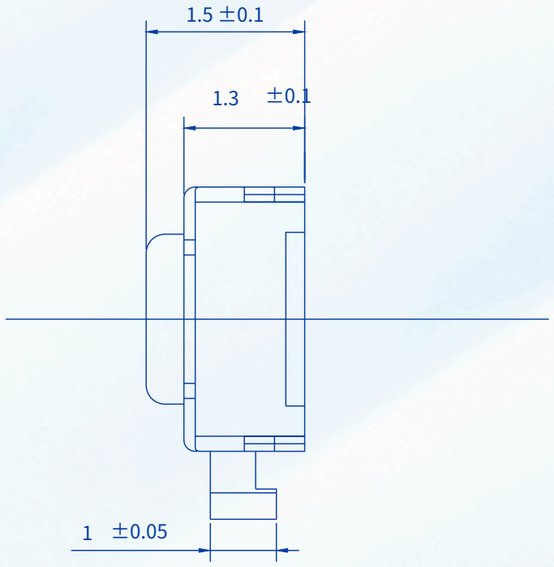

MATERIAL / SPECIFICATION	
Rated Load	DC12V 50mA
Insulation Resistance	⩾100 MΩ
Dielectric Strength	AC250V 50Hz/1min
Electrical Life	50,000 cycles Min
Operating Temperature	-25~+70°C
Relative Humidity	(40°C) ⩽60%
Contact Resistance	⩽50 mΩ
Stroke	0.2±0.05mm
Operating Force	200gf±50gf
Material Property	Environmentally Friendly (SGS)
BOM: Film	Qty 1; Polyimide (DuPont); Yellow
BOM: Contact Spring	Qty 2; Imported Silver-Clad Stainless Steel; Silver White Inlaid Silver
BOM: Cover	Qty 1; Imported Stainless Steel; Silver White
BOM: Base	Qty 1; Imported LCP; Black & Silver Plated
BOM: Button	Qty 1; Imported Reinforced Nylon; Black

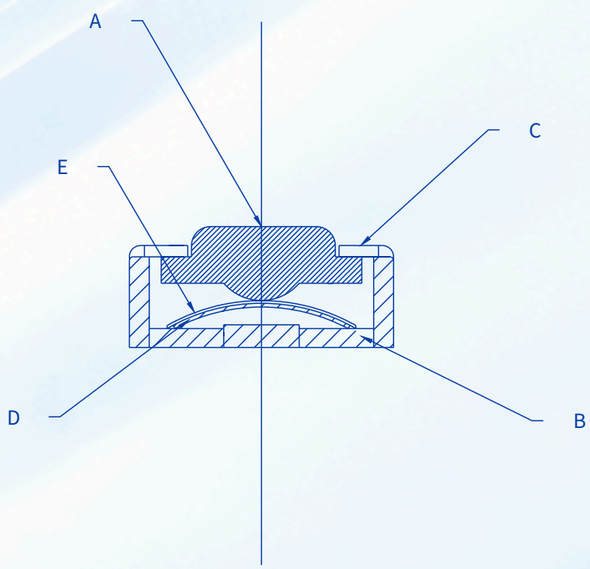

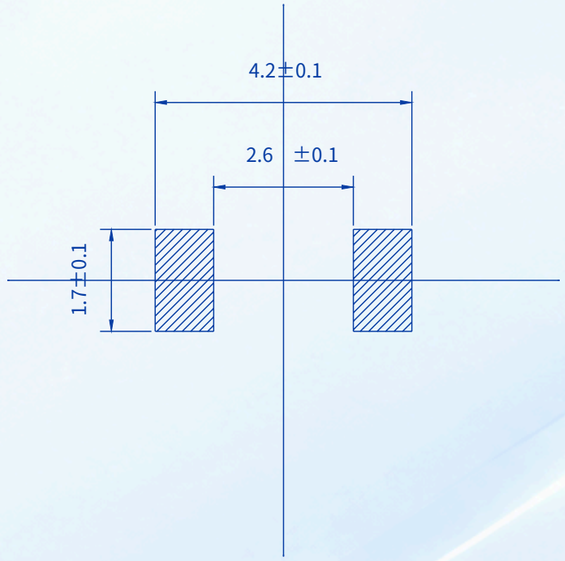

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	
		APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Tactile Switch 3.05×2.5 2 Pin SMD 1.5H							
PART NO.	KS-TS-C-07A						REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1	