


RoHS Compliant


REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

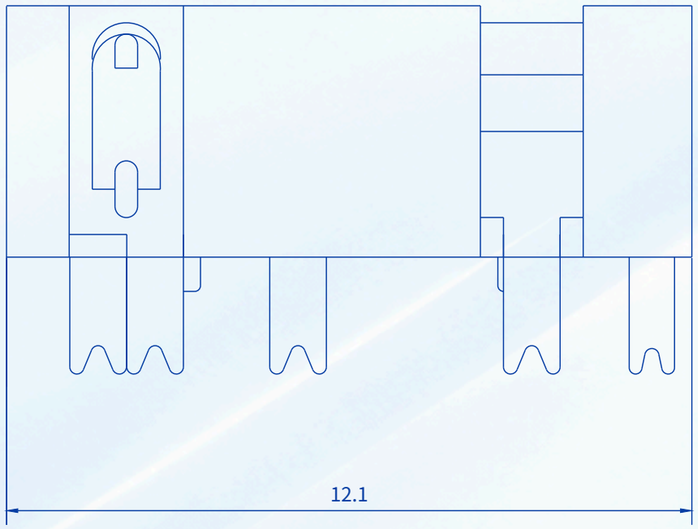

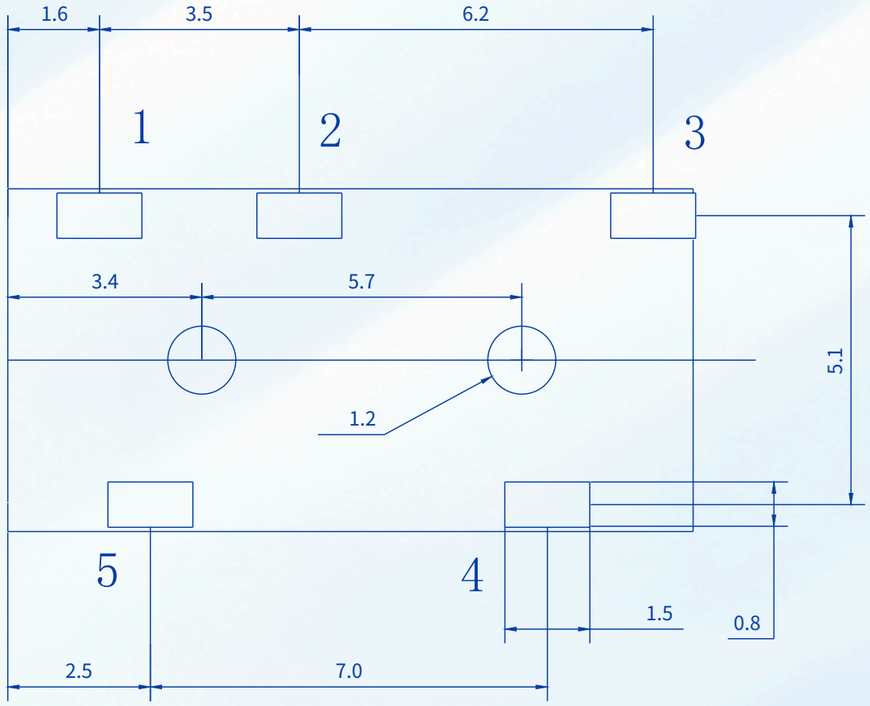

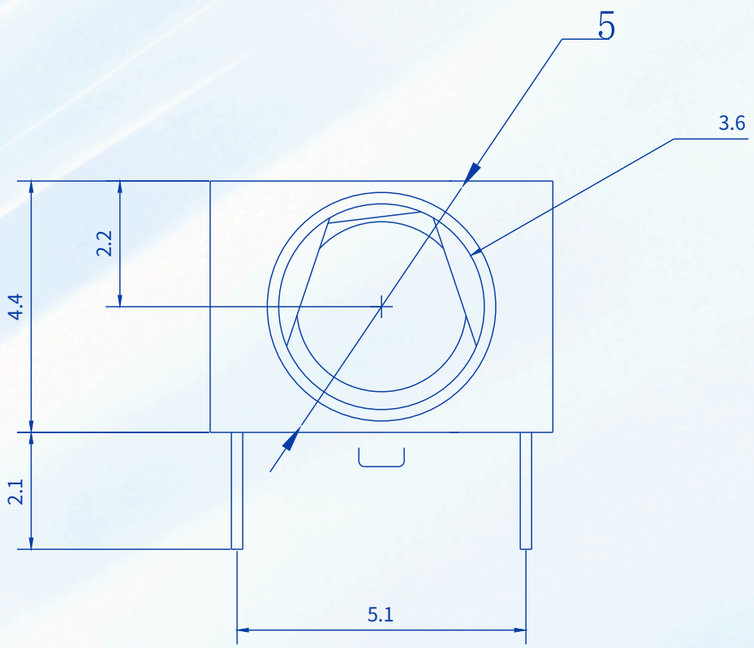

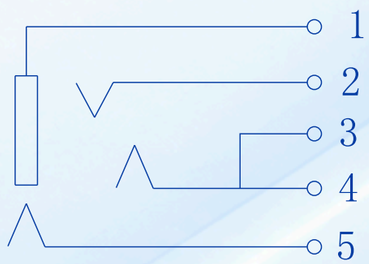

MATERIAL / SPECIFICATION	
PCB layout	Top view
Rated load	30 V / 0.2 A
Contact resistance	⩽30 mΩ
Insulation resistance	⩾100 MΩ
Dielectric strength	AC 250 V (50 Hz), min
Insertion / withdrawal force	5-15 N
Life	5000 cycles
Appearance	No corrosion, cracks or defective plating

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
0.0-10.0 mm	±0.10 mm
10.0-20.0 mm	±0.15 mm
20.0-50.0 mm	±0.20 mm

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	3.5 mm Through-Hole Audio Jack (5 Pin) PJ-327A Headless						
PART NO.	KS-PJ-327A-04					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1