
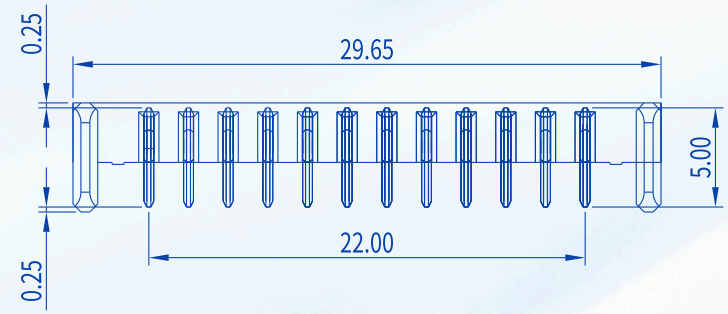
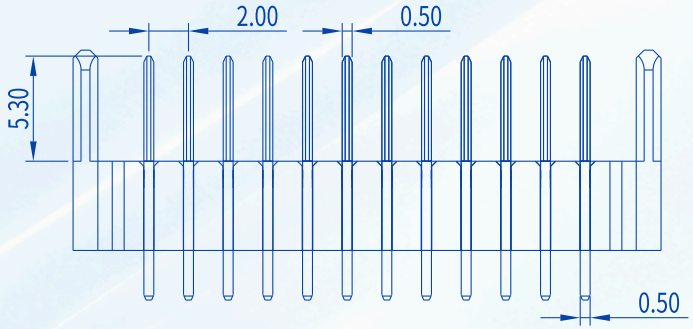
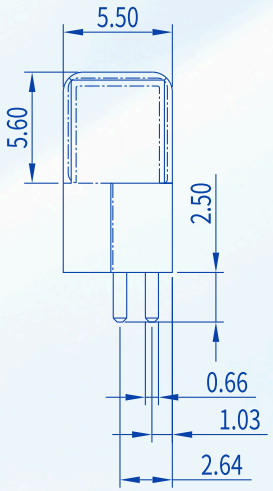



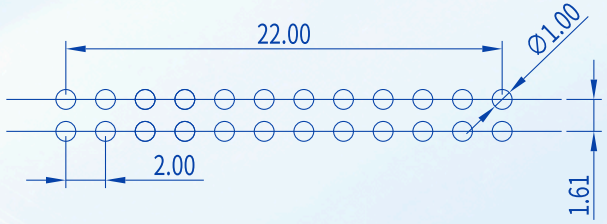


RECOMMENDED PCB LAYOUT

T=1.2MM,TOLERANCES±0.05MM

NOTE:

1. MATERIAL:
   - 1.1 HOUSING: PA9T, UL 94V-0
   - 1.2 TERMINAL: C2680
2. FINISH:
   - 2.1 TERMINAL: NICKEL 50 u"MIN UNDER PLATED OVERALL, Au PLATED ON THE CONTACT AREA. OR Tin ON THE SOLDERING AREA.
3. PRODUCT SPECIFICATION
   - 3.1 CURRENT RATING :5A
   - 3.2 VOLTAGE RATING : 30V AC
   - 3.3 DIELECTRIC WITHSTANDING VOLTAGE:500VAC
   - 3.4 INSULATION RESISTANCE: 100MΩ min.
   - 3.5 CONTACT RESISTANCE: 30mΩ Max.
   - 3.6 Operating Temperature: -40° ~105°

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

| | | | | |
|---|---|---|---|---|
| UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.5 ANGULAR ±2° X.X ±0.35 X.XX ±0.25 | DESIGN | | DATE | TITLE: 电池连接器 |
| | APPROVED | | DATE | |
| | MODEL: A01M-A-12P-M5双脚加强 | REV: | SCALE: | UNIT: mm |
| | | SIZE: A4 | SHEET: 1/1 | |