



RoHS Compliant

REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG	Mahm	Jlan

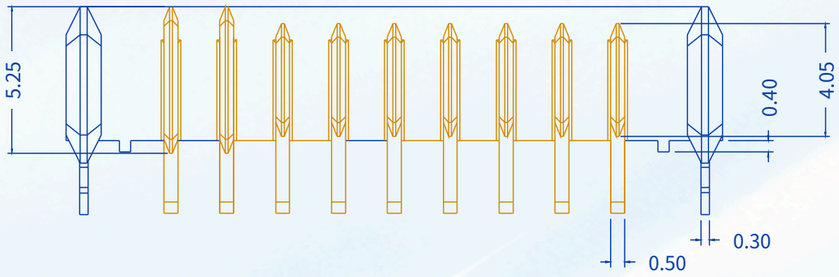


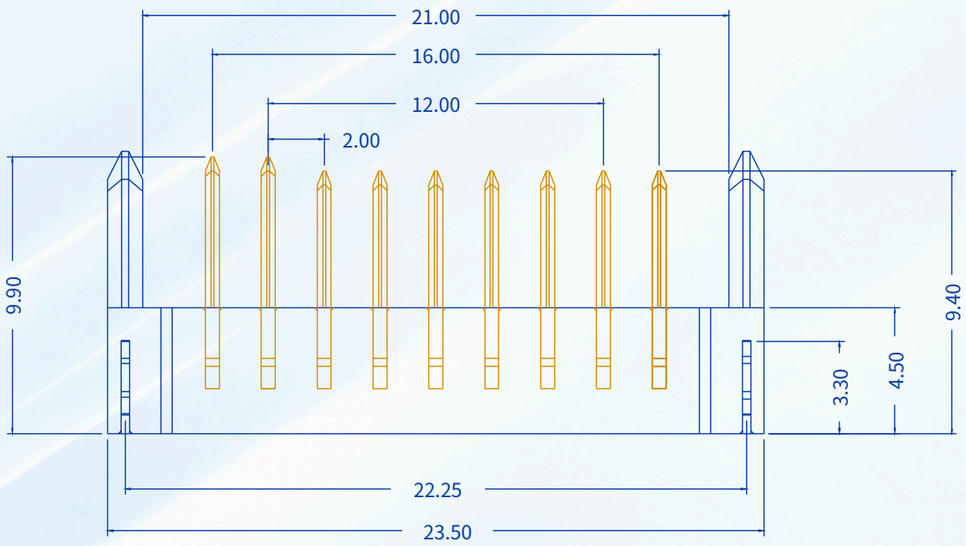

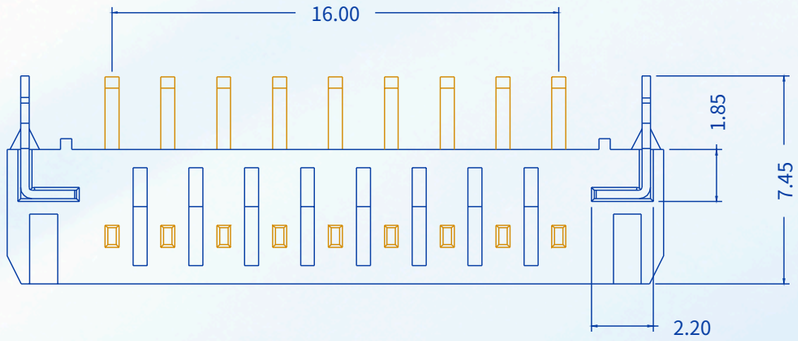

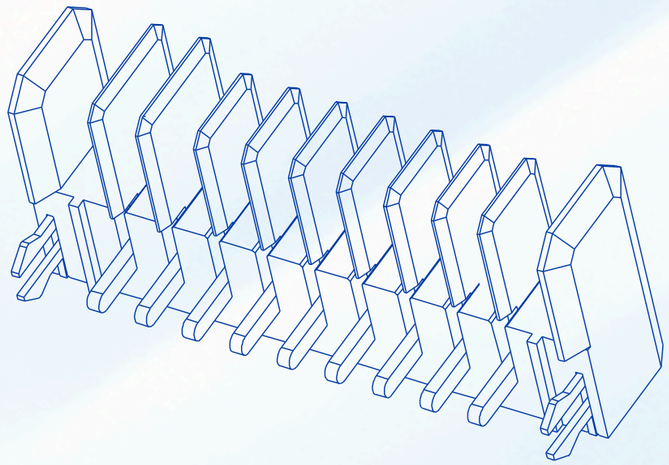

MATERIAL / SPECIFICATION	
Housing	PA9T+30%GF, UL94-V0
Housing Color	Black
Terminal	C5191-EH
Terminal Thickness	0.50±0.01mm
Appearance	No burrs, scratches or other defects
Current Rating	7A/Pin
Instantaneous Current	10A/Pin
Voltage Rating	125V AC/1 minute
Operating Temperature	-20°C~105°C
Heat Resistance	260°C, 5Sec

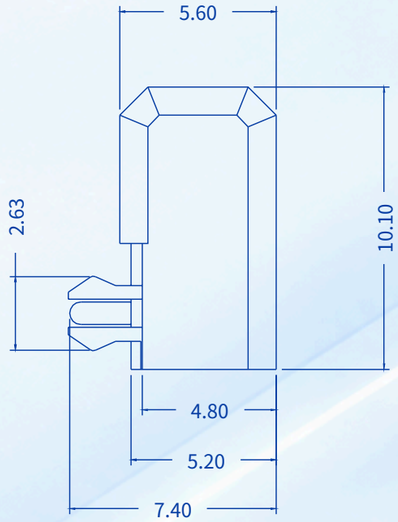

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.50
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
X.°	±5.00°
X.X°	±2.00°
X.XX°	±1.00°
X.XXX°	±0.50°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	Mahm
APPROVED BY	Jlan

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch Right-Angle Through-Hole Male Blade Battery Connector (8 Pin) With Mounting Ears						
PART NO.	KS-BL200-08M-RDE					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1