

RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

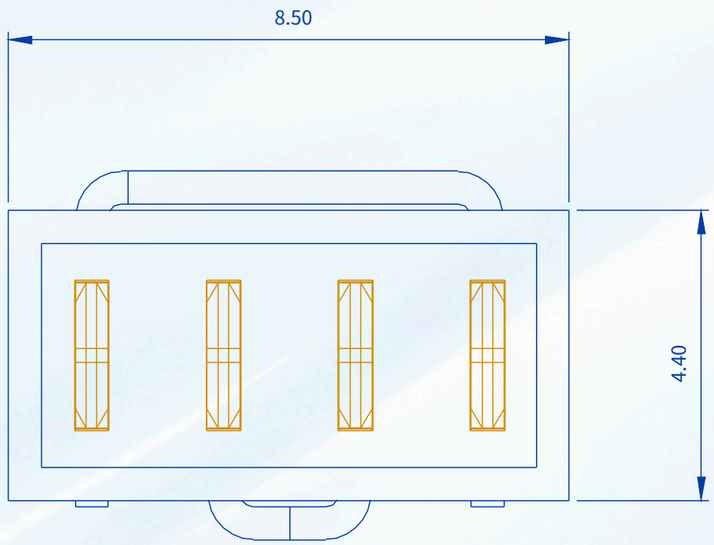


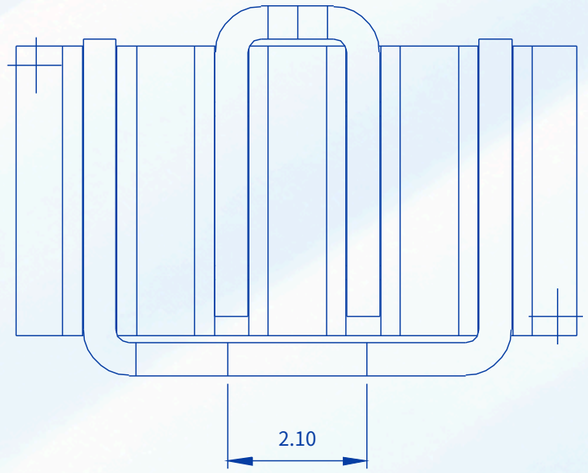

MATERIAL / SPECIFICATION	
Insulator	LCP, Black
Contact	Brass, Gold Plated
Rated Voltage	AC/DC 30V Max
Dielectric Voltage	AC 1000V 1 Minute, No Damage
Insulation Resistance	DC 500V 1 Minute, 1000 MΩ Min
Operating Temperature	-20° to +80°

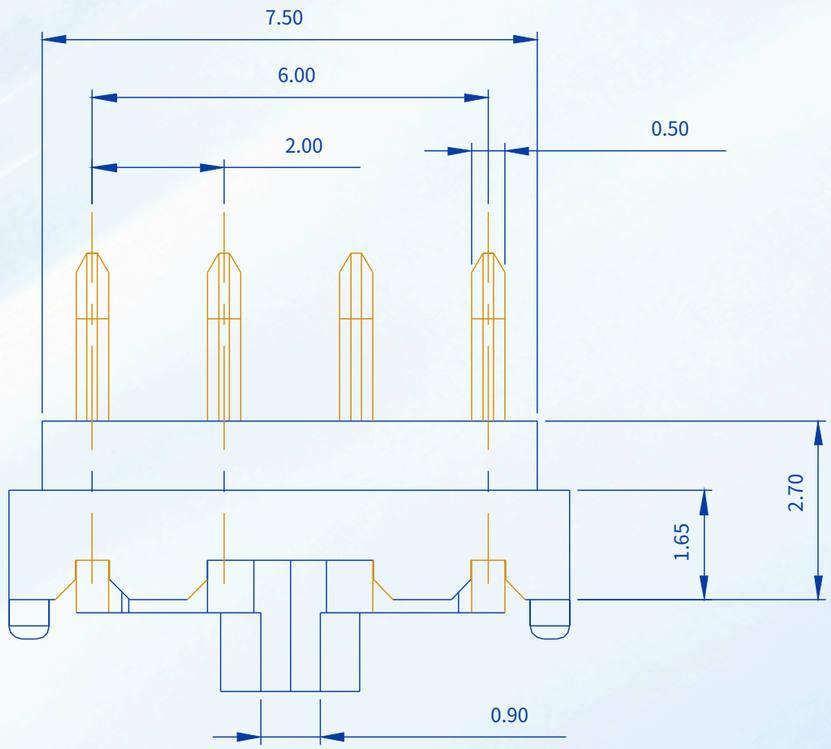

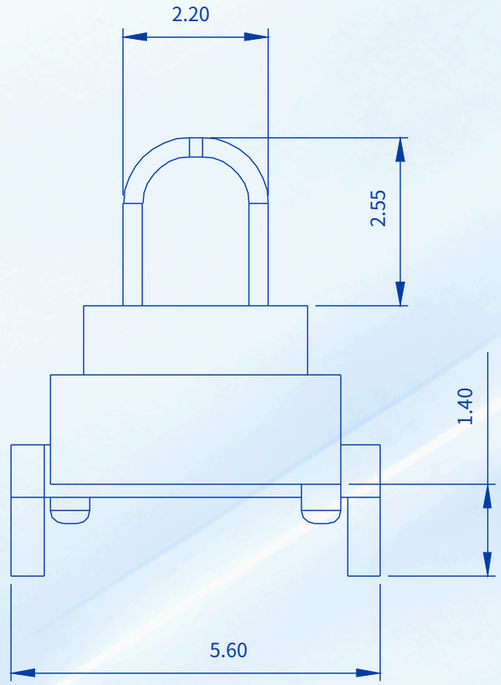

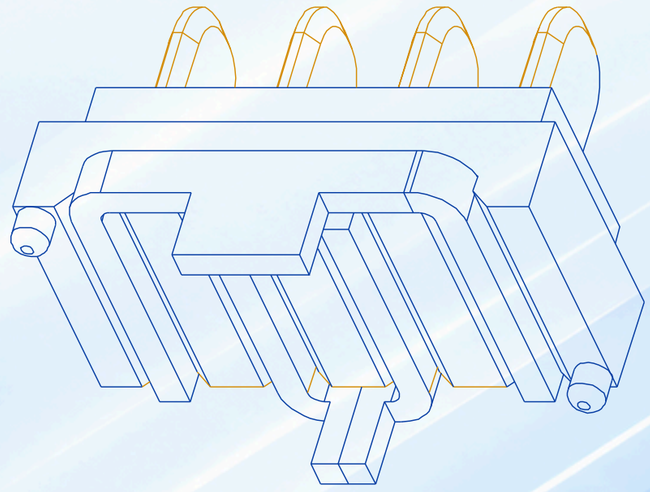

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
.X	±0.38
.XX	±0.25
.XXX	±0.10

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch Vertical Through-Hole Male Blade Battery Connector (4 Pin)						
PART NO.	KS-BL200-04M-VD-02					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1