
RoHS Compliant


REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

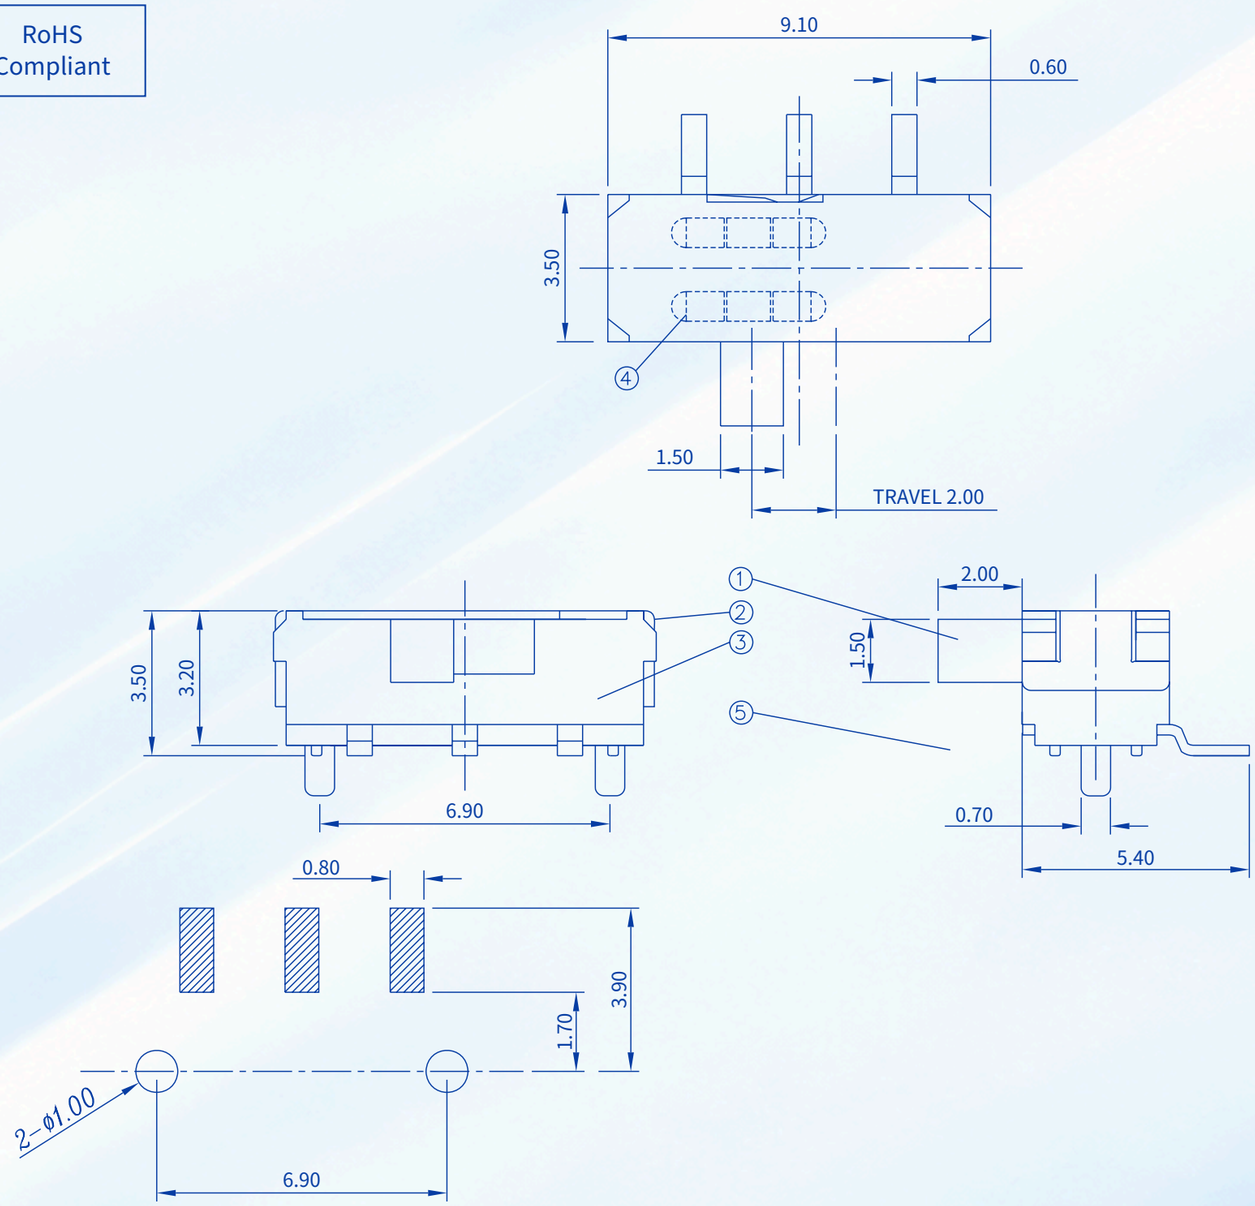

P.C.B LAYOUT DIMENSION

TOP VIEW



CIRCUIT

MATERIAL / SPECIFICATION	
Rated Load	DC30V 0.3A
Dielectric Strength	500V AC R.M.S. 1min
Insulation Resistance	⩾100 MΩ (at 500V DC)
Contact Resistance	⩽80 mΩ
Operating Temperature	-20~+80°C
Life	10,000 cycles
BOM: Terminals	Qty 3; C2680; Ag
BOM: Contact	Qty 2; C5210; Ag
BOM: Bottom	Qty 1; PA6T; Black
BOM: Cover	Qty 1; SUS; Natural
BOM: Stem	Qty 1; PA6T; Black

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
Dimension Up to 10	±0.2
Dimension Above 10~50	±0.3
Dimension Above 50~100	±0.5
Angle	±3°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch Through-Hole With Locating Post						
PART NO.	KS-SS-MSK-22D18G2-T-P-01					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1