


RoHS Compliant


REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

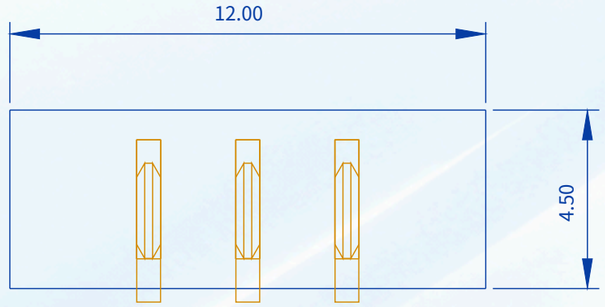

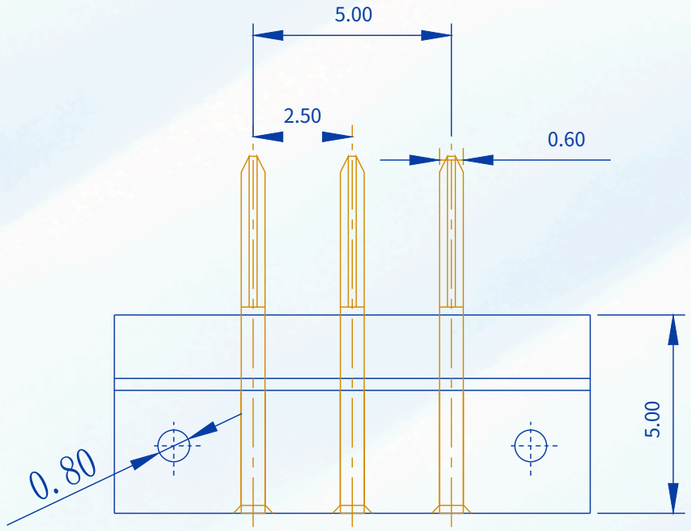

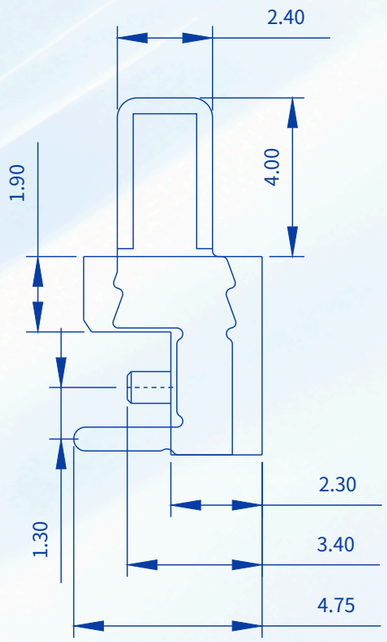



Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

MATERIAL / SPECIFICATION	
Housing	PA9T, UL 94V-0
Terminal	C2680
Plated	Gold over Nickel or Tin
Current Rating	7A
Voltage Rating	125V AC
Dielectric Withstanding Voltage	500VAC
Insulation Resistance	100 MΩ min.
Contact Resistance	30 mΩ Max.
Operating Temperature	-40° ~105°
BOM: Housing	NYLON 9T; Qty 1; BLACK
BOM: Contact Terminal	PHOSPHOR BRONZE; Qty 9; Au PLATED

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
Up to 5	±0.2
Above 5 ~ 30	±0.3
Above 30	±0.5
Angle	±3°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.5 mm Pitch Right-Angle Through-Hole Male Blade Battery Connector (3 Pin) With Locating Post Recessed Mount						
PART NO.	KS-BL250-03M-RDPJ					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1