



RoHS Compliant


REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG	Mahn	Jlan

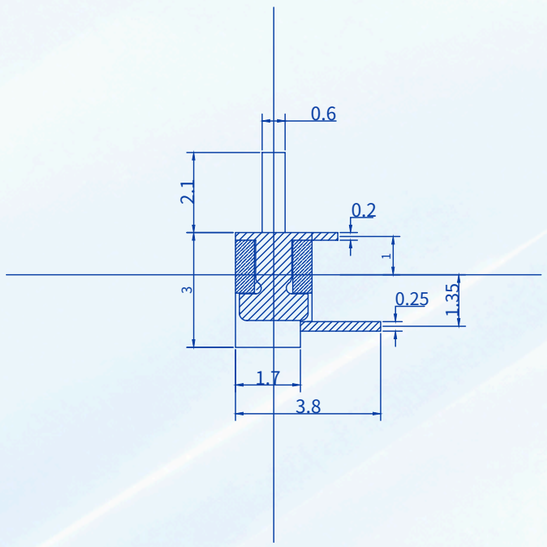

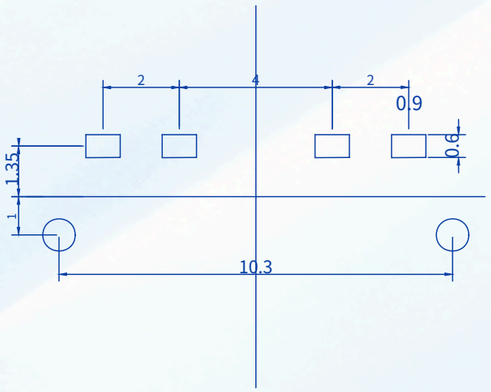

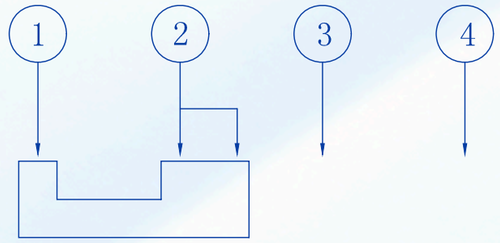

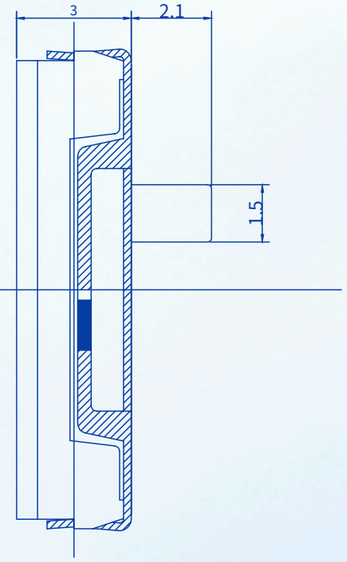

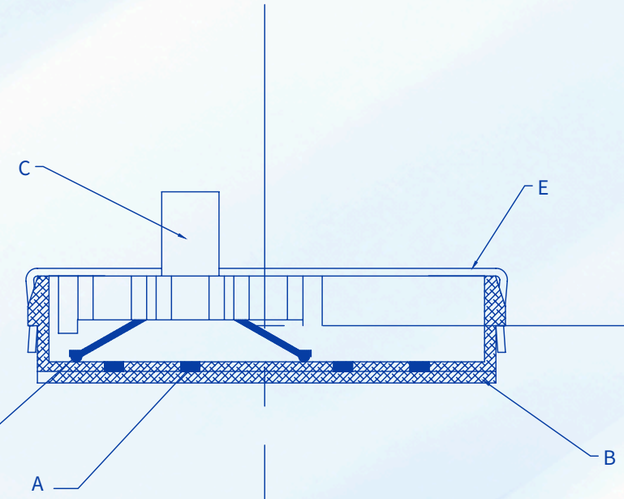

MATERIAL / SPECIFICATION	
Rated Range	50mA DC12V
Insulation Resistance	100 MΩ min (DC100V)
Dielectric Strength	AC100V (50/60Hz for 1 minute)
Mechanical Life	10,000 cycles
Operating Temperature	-10~+60°C
Operating Force	200±100gf
Material Property	Environmentally Friendly (SGS)
BOM: Cover	Qty 1; Stainless Steel; Silver White
BOM: Contact Spring	Qty 1; Silver-Clad Phosphor Bronze; Silver White Inlaid Silver
BOM: Toggle Handle	Qty 1; Reinforced Nylon; Black
BOM: Base	Qty 1; Reinforced Nylon; Black
BOM: Clip	Qty 1; Brass; Silver White Silver Plated

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	Mahn
		APPROVED BY	Jlan

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 4 Pin SMD With Locating Post						
PART NO.	KS-SS-SK-04E					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1