


RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

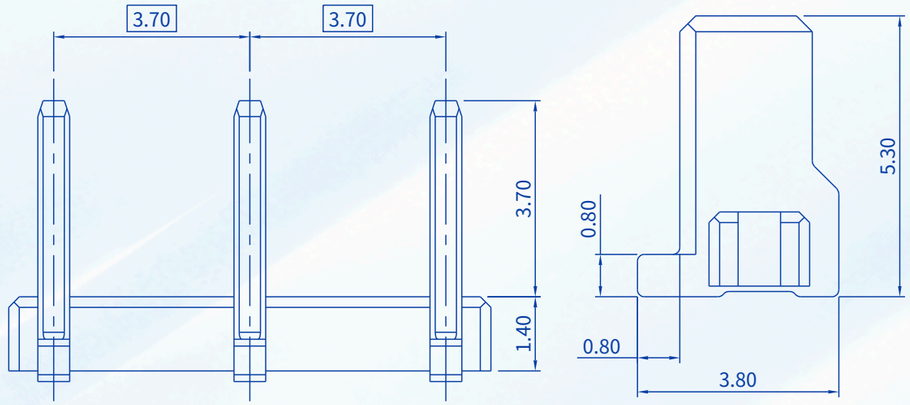

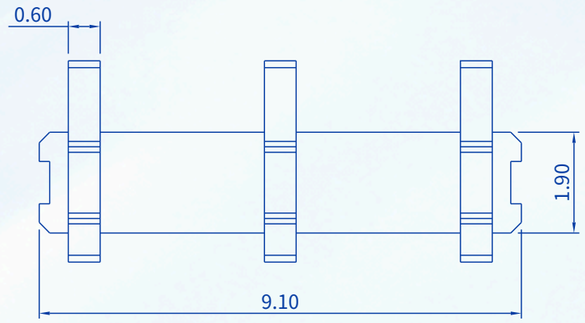



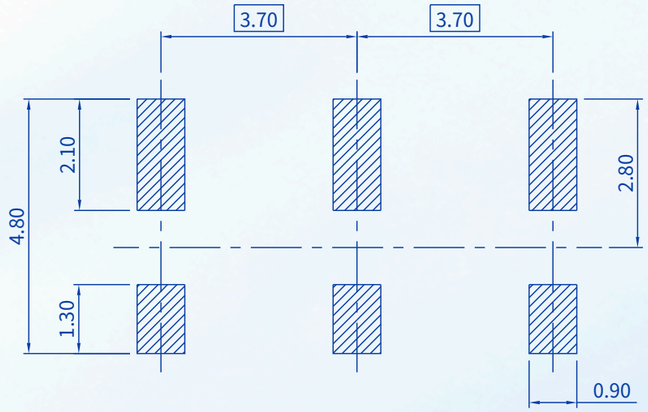

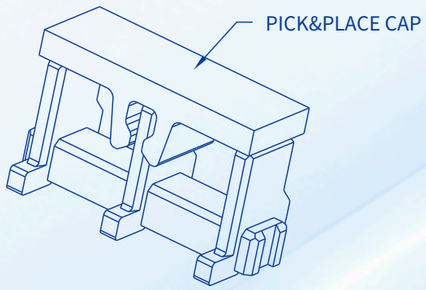

MATERIAL / SPECIFICATION	
Drawing interpretation	ANSI Y14.5N-1994
Housing	High-temp. thermoplastic, UL94V-0, black
Contact	Copper alloy, T=0.60 mm
Contact area finish	Gold flash over 50 µin nickel

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.15
X.X	±0.10
X.XX	±0.05
X.XXX	±0.005
ANGLE X.	±1°
ANGLE X.X	±0.5°
ANGLE X.XX	±0.05°
ANGLE X.XXX	±0.005°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	3.7 mm Pitch 5.3 mm Height SMT Spring Contact Battery Connector (3 Pin) No Locating Post Top-Contact						
PART NO.	KS-BC370-03T-530					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1