


RoHS Compliant

## REVISION HISTORY


| REV. | DESCRIPTION | DRAWN BY | CHECKED BY | APPROVED BY |
|---|---|---|---|---|
| A0 | INITIAL RELEASE | KANGSHENG | | |

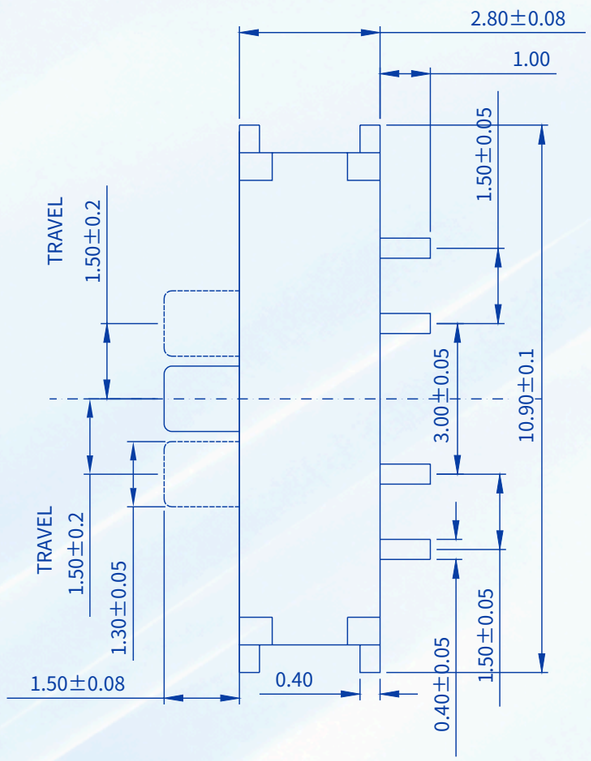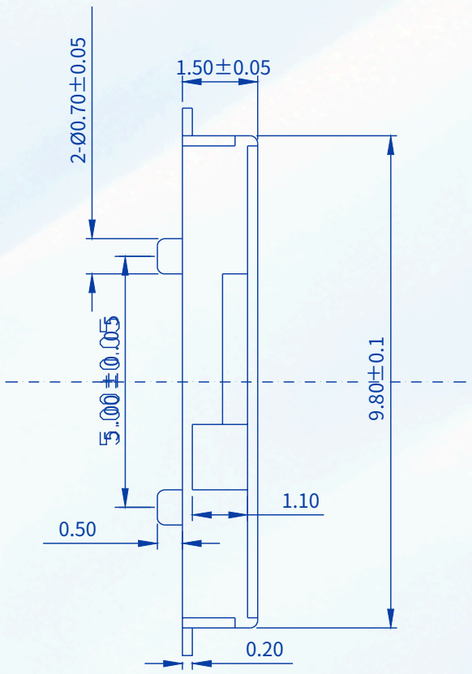



| MATERIAL / SPECIFICATION | |
|---|---|
| Rated Load | DC12V 50mA |
| Insulation Resistance | ⩾100 MΩ |
| Dielectric Strength | AC250V 50Hz/1min |
| Electrical Life | 10000 cycles Min |
| Ambient Temperature | -25~+70°C |
| Relative Humidity | (40°C) ⩽95% |
| Contact Resistance | ⩽100 mΩ |
| Operating Force | 180gf±80gf |
| BOM: Spring Piece | Qty 1; Stainless Steel; Silver White |
| BOM: Contact Spring | Qty 1; Silver-Clad Phosphor Bronze; Silver White Inlaid Silver |
| BOM: Cover | Qty 1; Brass; Silver White |
| BOM: Base | Qty 1; Imported LCP; Black & Silver Plated |
| BOM: Press Handle | Qty 1; Imported PPA; Black |

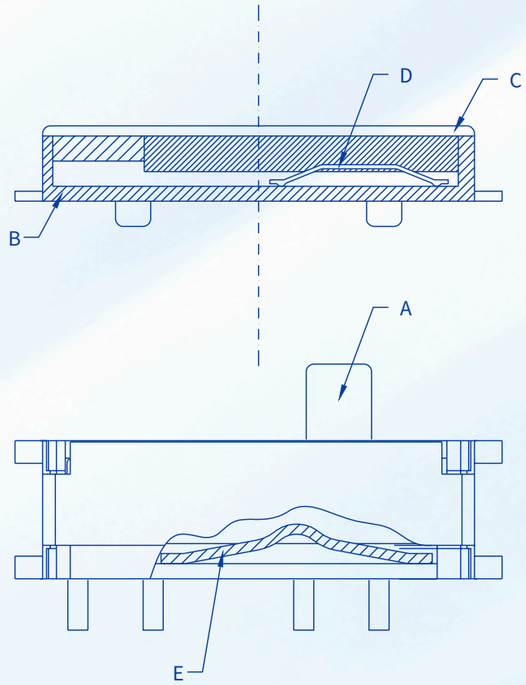


| | | | |
|---|---|---|---|
| GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED) | PROJECTION | DRAWN BY | KANGSHENG |
| | THIRD ANGLE PROJECTION | CHECKED BY | |
| | | APPROVED BY | |

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.
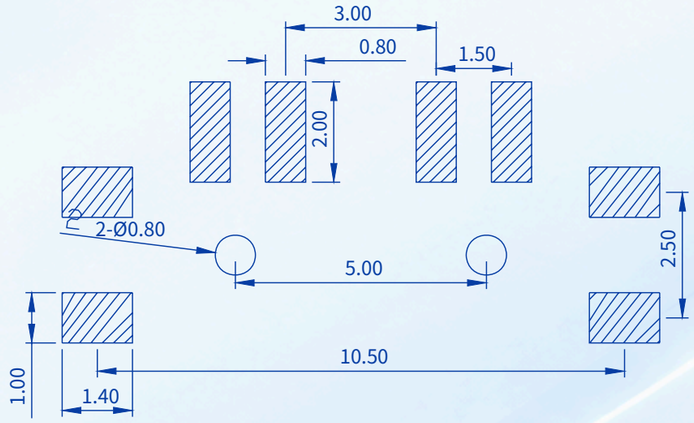
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| PRODUCT NAME | Slide Switch 4 Pin Side-Actuated SMD With Locating Post | | | | | | |
| PART NO. | KS-SS-SK-12 | | | | | REV. | A0 |
| SCALE | NTS | UNIT | mm | SIZE | A3 | SHEET | 1/1 |