


RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

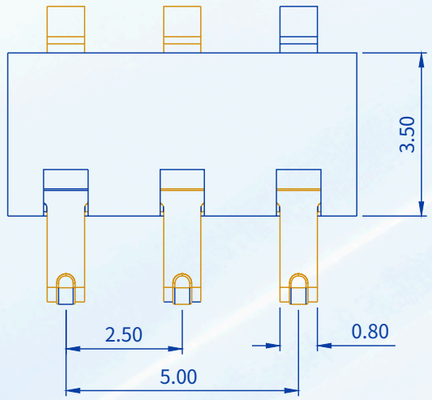

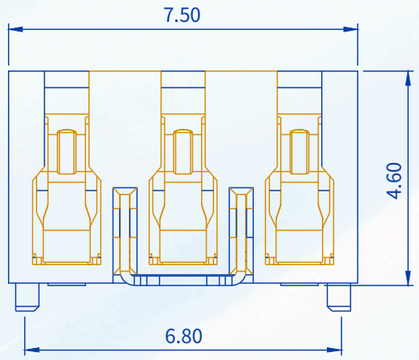

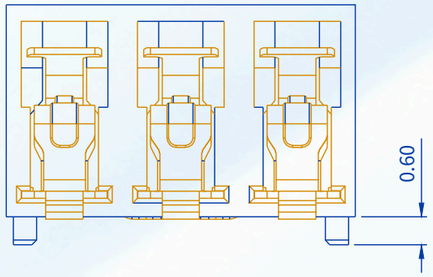


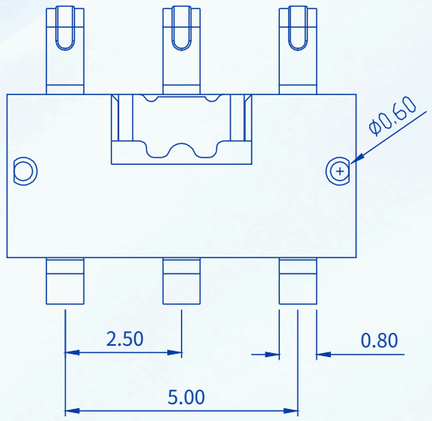


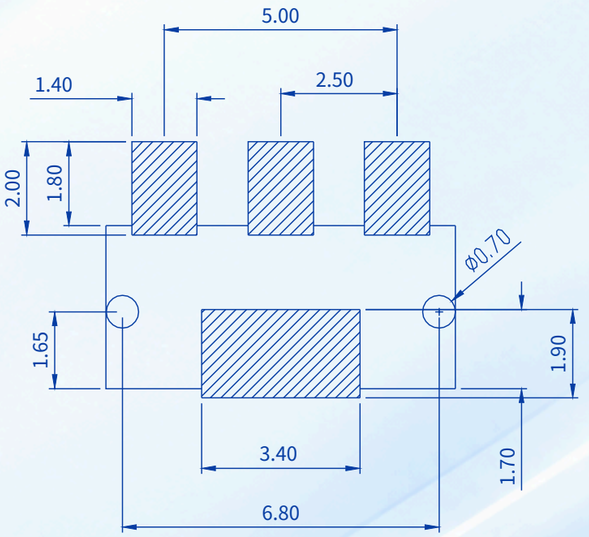

RECOMMENDED PCB LAYOUT

TOL:(±0.05)

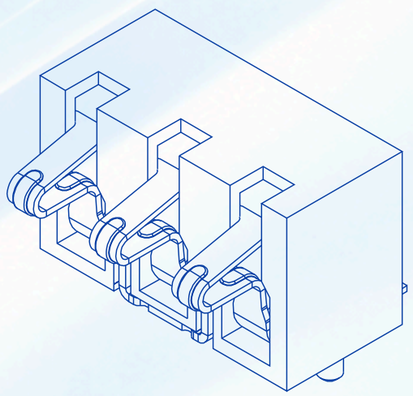

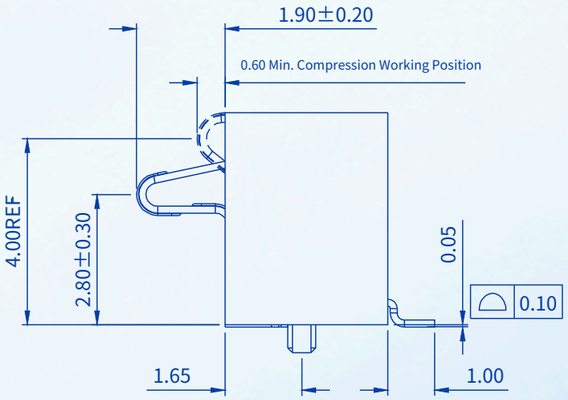

MATERIAL / SPECIFICATION

Current Rating	2.0A
Voltage Rating	12V
Dielectric Withstanding Voltage	500V
Contact Resistance	30 mΩ
Insulation Resistance	500 MΩ
Operating Temperature	-40°C~+85°C
Insulator	LCP, Black
Contact	Phosphor Bronze
Contact Plated	Gold 3μ" on contact area

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.35
X.X	±0.25
X.XX	±0.15
X.XXX	±0.05

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.5 mm Pitch 4.6 mm Height SMT Spring Contact Battery Connector (3 Pin) With Locating Post Side-Contact						
PART NO.	KS-BC250-03S-460P					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1