
RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

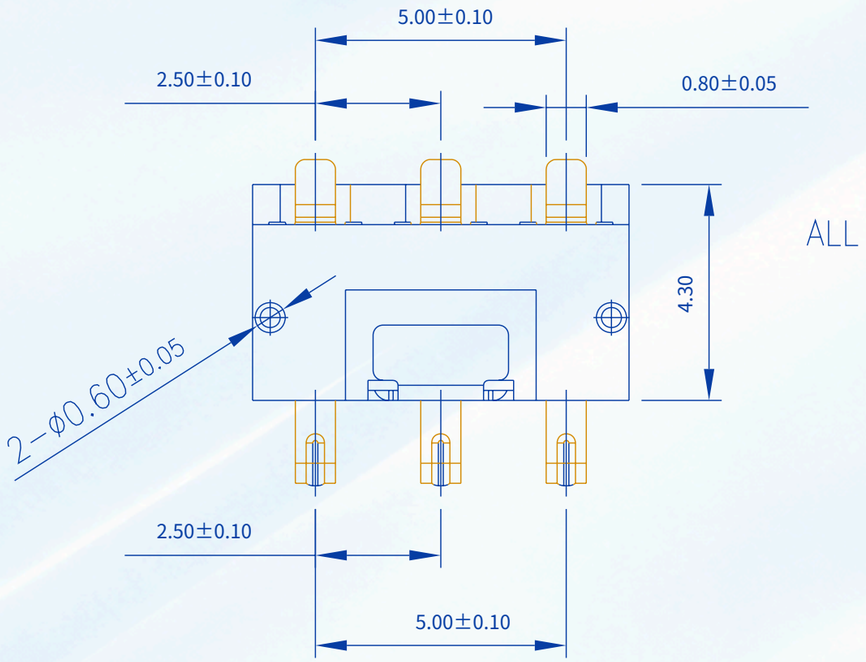

ALL


Dimension		
H	DIM A	DIM B
5.4	5.4	4.4
6.0	6.0	4.7
6.5	6.5	5.2
7.0	7.0	5.6
7.5	7.5	6.5
8.0	8.0	6.7
8.5	8.5	7.2

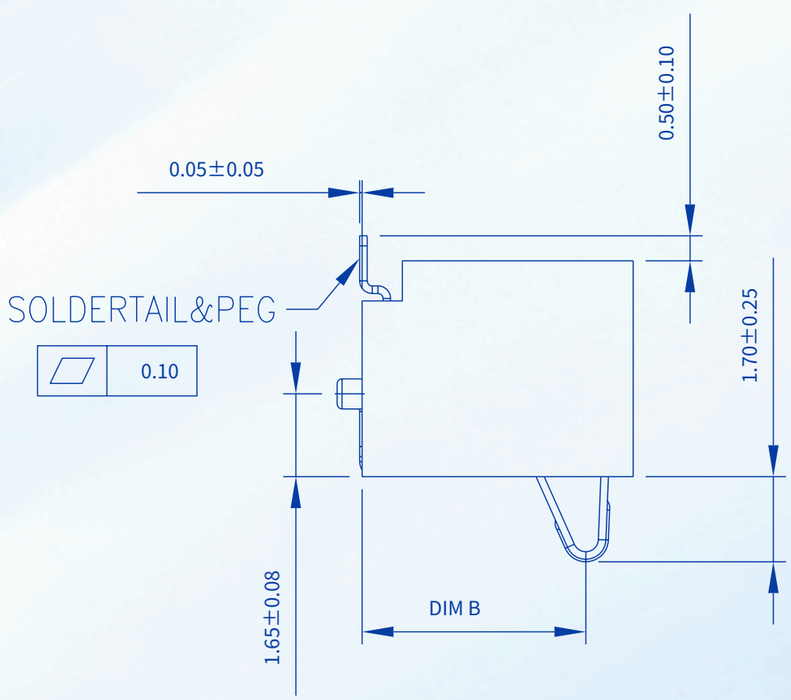

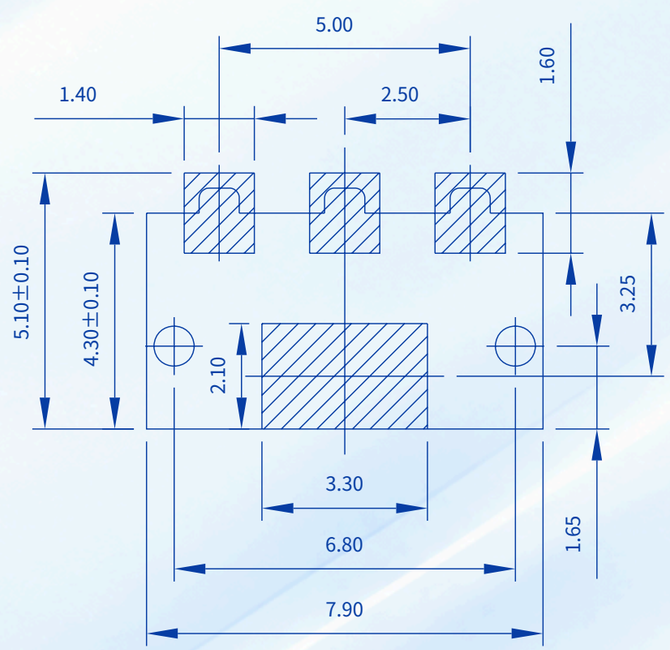

RECOMMENDED PCB LAYOUT

TOP VIEW(.XX±0.05)

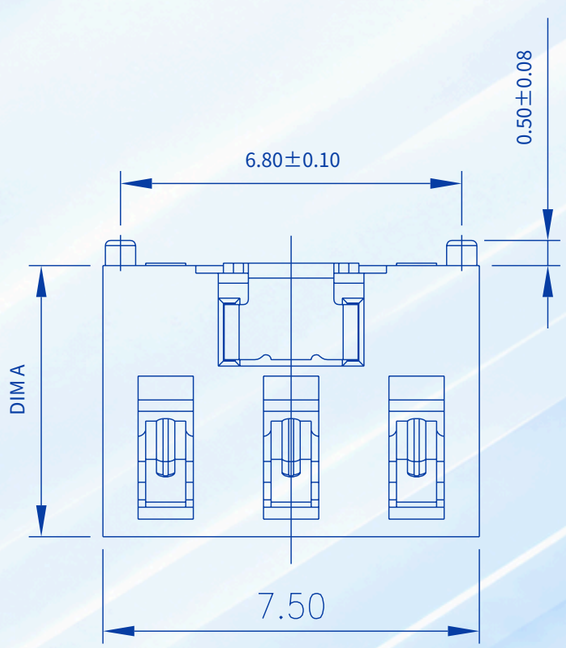

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.15
X.X	±0.10
X.XX	±0.05
X.XXX	±0.005
X.°	±1°
X.X°	±0.5°
X.XX°	±0.05°
X.XXX°	±0.005°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.5 mm Pitch 5.4 mm Height SMT Spring Contact Battery Connector (3 Pin) With Locating Post Side-Contact						
PART NO.	KS-BC250-03S-540P-01					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1