

Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:7A
instant CURRENT:10A
Contact Resistance:30MΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°






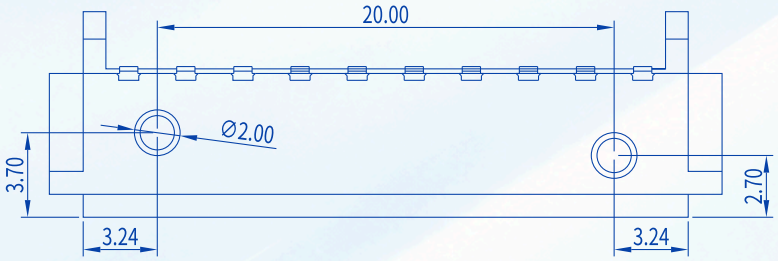

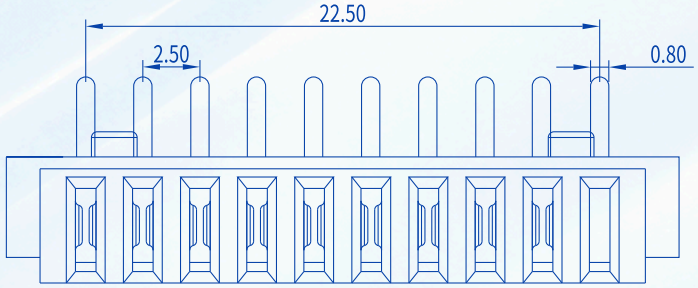

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

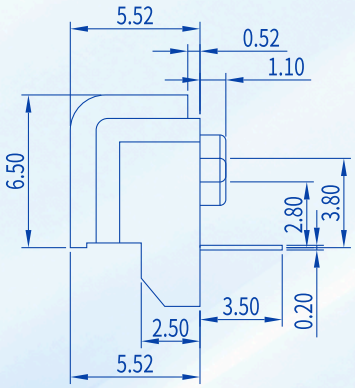

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.20 ANGULAR ±2°
X.X ±0.15
X.XX ±0.10

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

DESIGN		DATE		TITLE: 电池连接器
APPROVED		DATE		
MODEL: B04F-10P-L2方柱		REV:	SCALE:	UNIT: mm
		SIZE: A4	SHEET: 1/1	