



Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:7A
instant CURRENT:10A
Contact Resistance:30MΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°



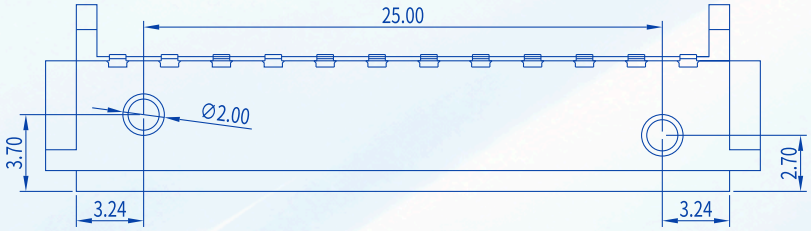

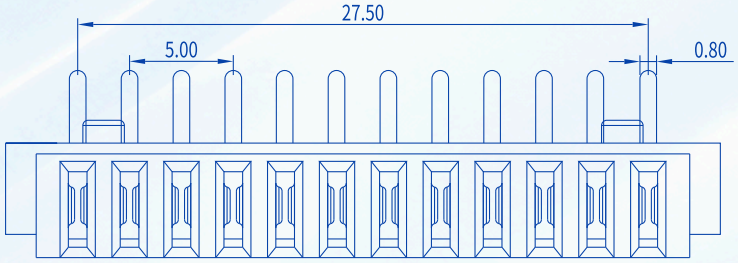

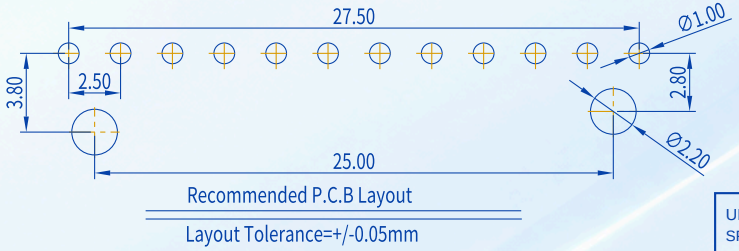

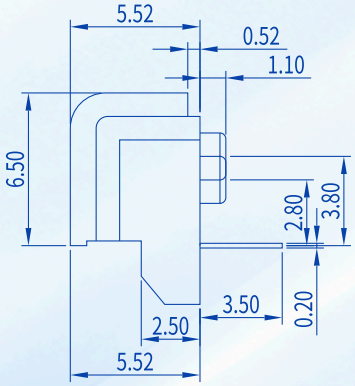

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.20 ANGULAR ±2° X.X ±0.15 X.XX ±0.10	DESIGN		DATE	TITLE: 电池连接器
	APPROVED		DATE	
	MODEL: B04F-12P-L2方柱	REV:	SCALE:	UNIT: mm
		SIZE: A4	SHEET: 1/1	