


RoHS Compliant


REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

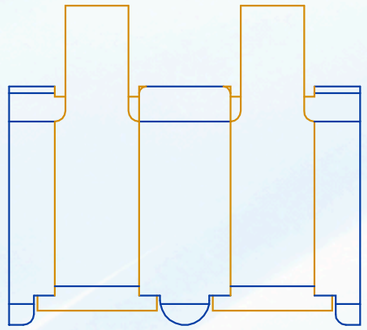

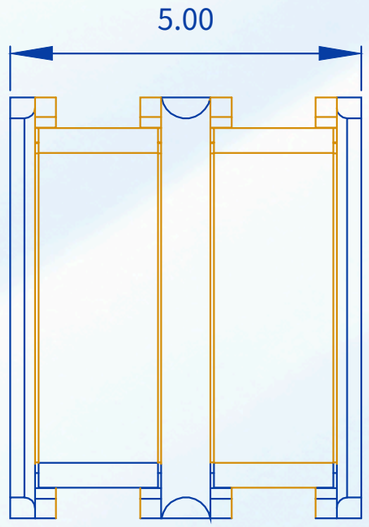


MATERIAL / SPECIFICATION	
Rated Current	3.0A
Rated Voltage	30V
Withstanding Voltage	500V
Contact Resistance	30 mΩ MAX
Insulation Resistance	500 MΩ
Operating Temperature	-55°C~+125°C
Durability	5000 Cycles Min.
Housing	LCP, Black
Contact	Brass C2680, Gold Plated 3U"

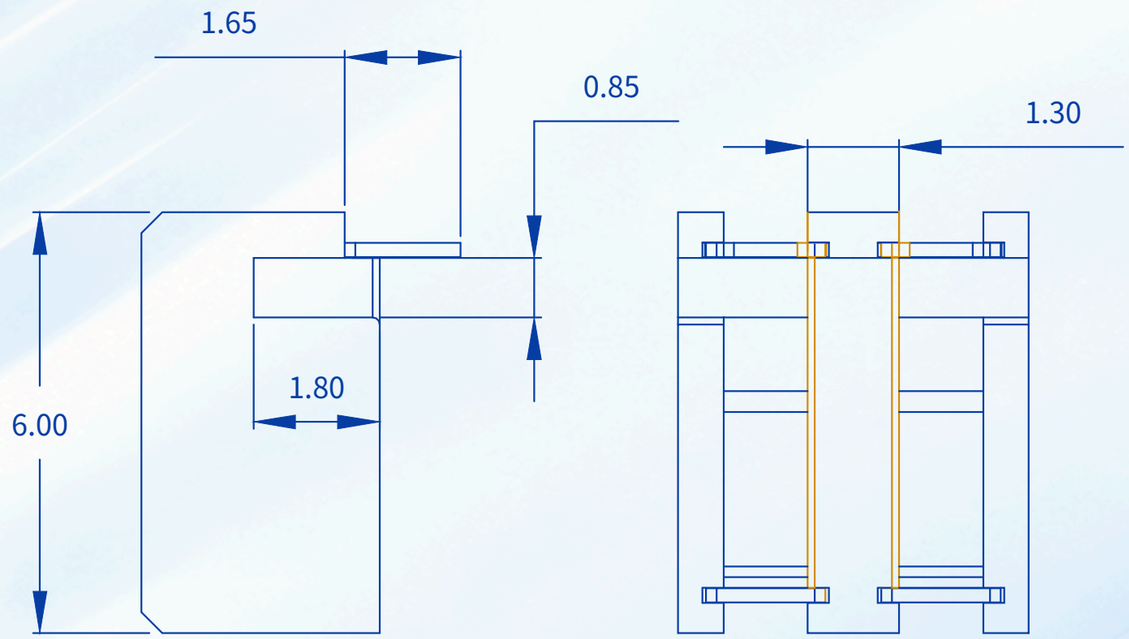

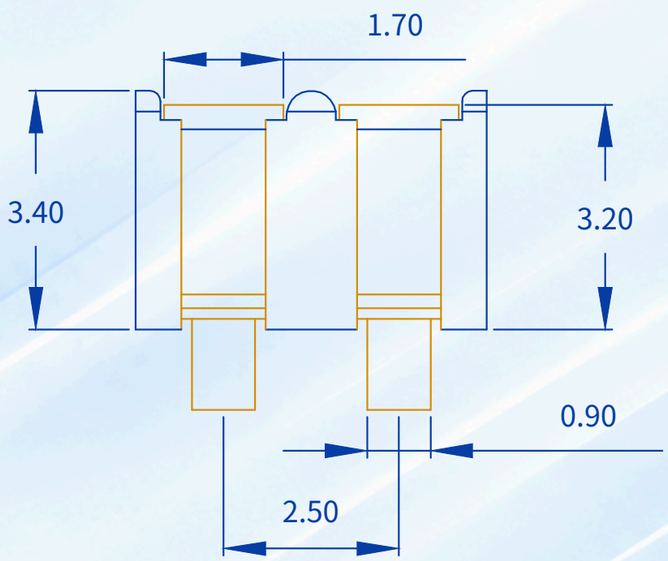

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.35
X.X	±0.25
X.XX	±0.15
X.XXX	±0.05

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.5 mm Pitch 3.4 mm Height SMT Female Spring Contact Battery Connector (2 Pin)						
PART NO.	KS-BC250-02F-340					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1