


RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

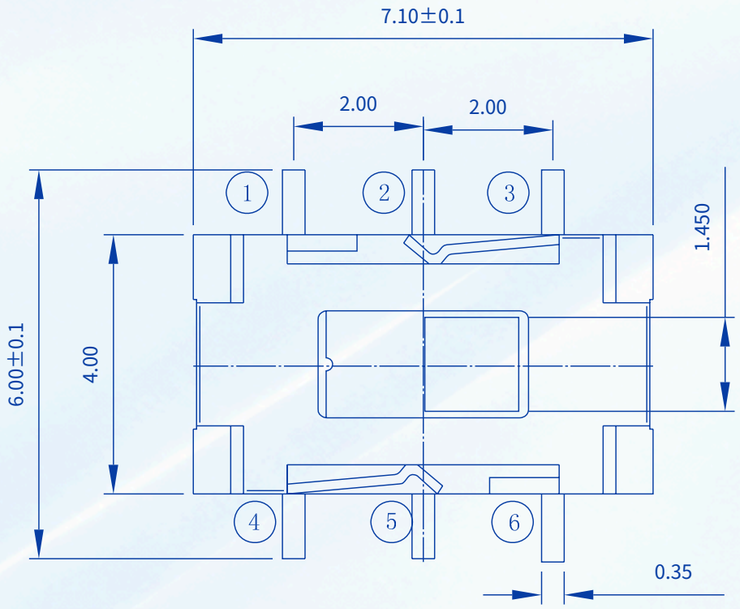


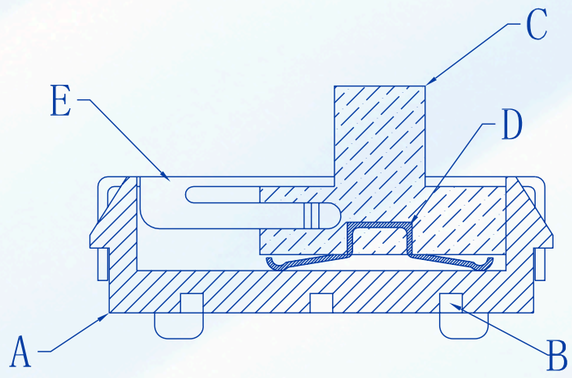

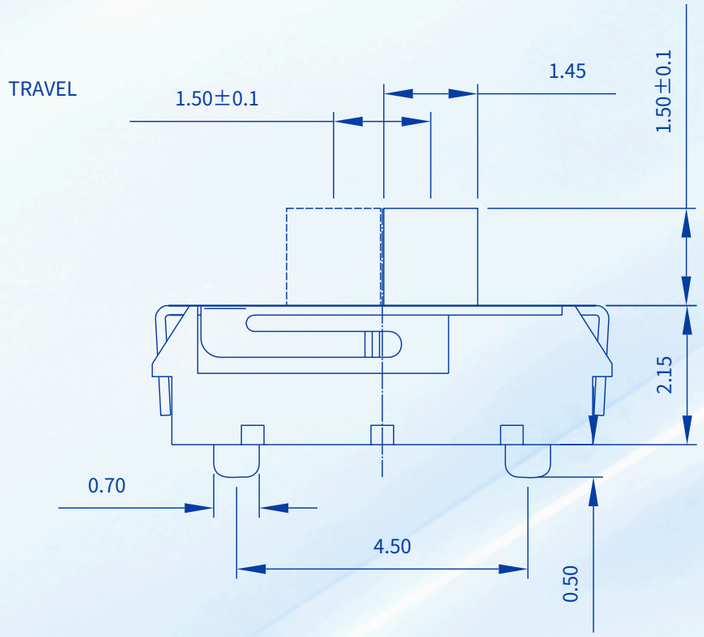

MATERIAL / SPECIFICATION	
Rated Current	50mA MAX
Rated Voltage	DC 12V
Contact Resistance	⩽70 mΩ
Insulation Resistance	⩾100 MΩ
Compressive Strength	AC250V 50Hz/1 min
Operating Force	150±100gf
Mechanical Life	10,000 cycles Min
Operation Stroke	1.5±0.1mm
Temperature Range	-30°C ~ +85°C
BOM: Cover Plate	Qty 1; Stainless Steel; Plating Overall Cleaning; Colour White
BOM: Spring Leaf	Qty 3; Silver-Clad Copper; Plating Contact Single-Side Silver Plating; Colour Contact Surface Silver White
BOM: Peach Heart	Qty 1; High-Temperature Nylon; Colour Black
BOM: Insert	Qty 1; Brass; Plating Overall Silver Plating; Colour Silver White
BOM: Base	Qty 1; LCP; Colour Black

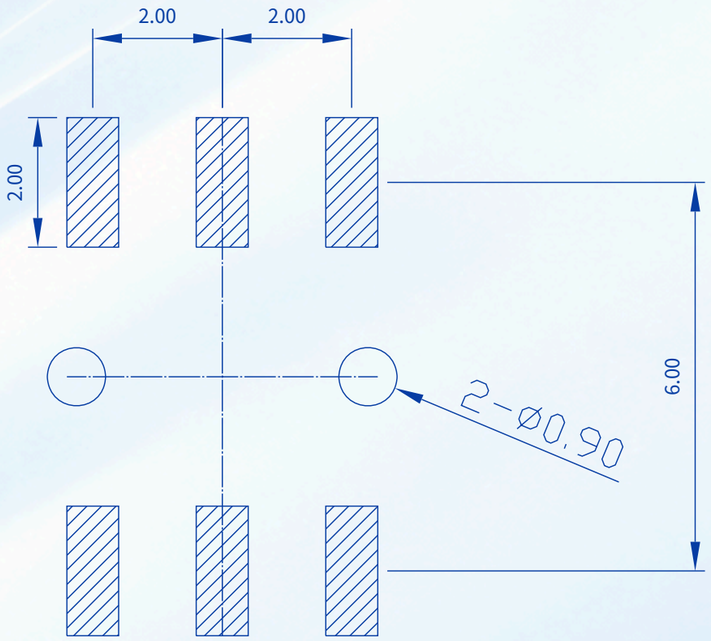

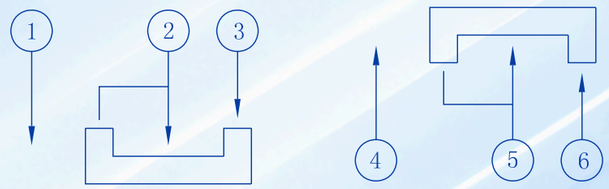

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.3
.X	±0.2
.XX	±0.1
.XXX	±0.05
X.°	±5°
.X°	±3°
.XX°	±2°
.XXX°	±1°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 6 Pin SMD With Locating Post						
PART NO.	KS-SS-SK-08					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1