


RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

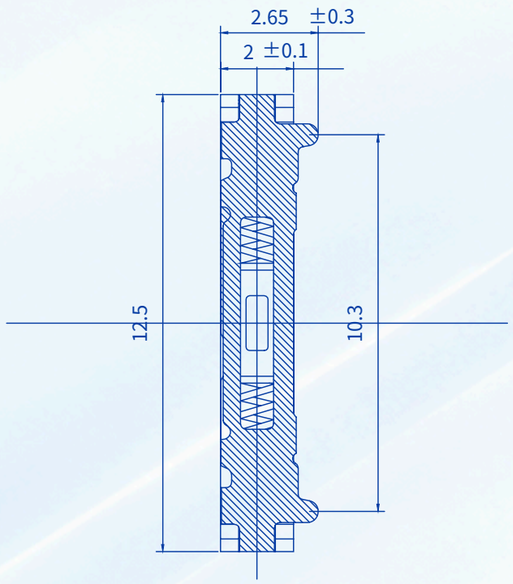


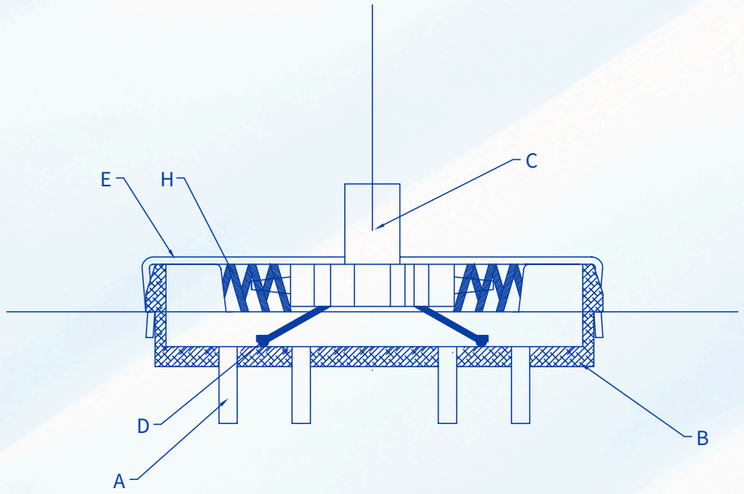


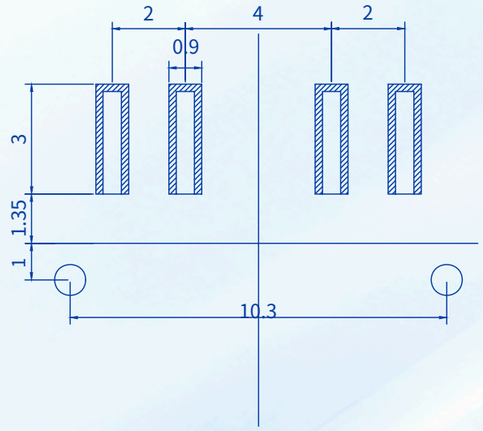

MATERIAL / SPECIFICATION	
Rated Range	50mA DC12V
Insulation Resistance	100 MΩ min (DC100V)
Dielectric Strength	AC100V (50/60Hz for 1 minute)
Mechanical Life	10,000 cycles
Operating Temperature	-10~+60°C
Operating Force	200±100gf
Material Property	Environmentally Friendly (SGS)
BOM: Spring	Qty 2; Stainless Steel; Silver White
BOM: Cover	Qty 1; Stainless Steel; Silver White
BOM: Contact Spring	Qty 1; Silver-Clad Phosphor Bronze; Silver White Inlaid Silver
BOM: Toggle Handle	Qty 1; Reinforced Nylon; Black
BOM: Base	Qty 1; Reinforced Nylon; Black
BOM: Clip	Qty 1; Brass; Silver White Silver Plated

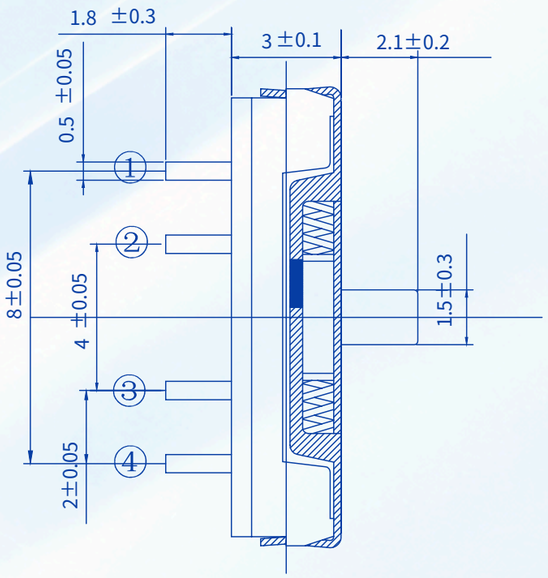

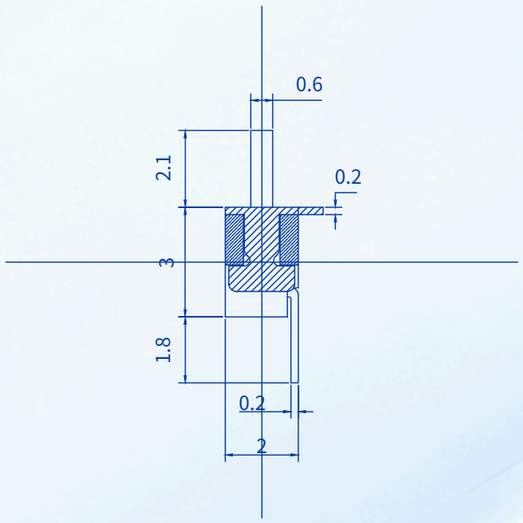

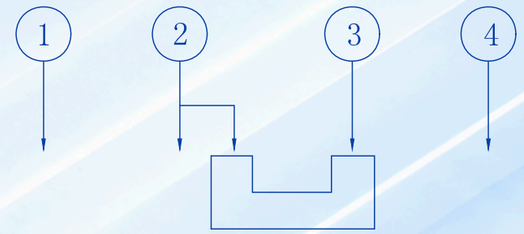

GENERAL TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 4 Pin SMD Left-Right Self-Reset						
PART NO.	KS-SS-SK-04C					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1