


RoHS Compliant

REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

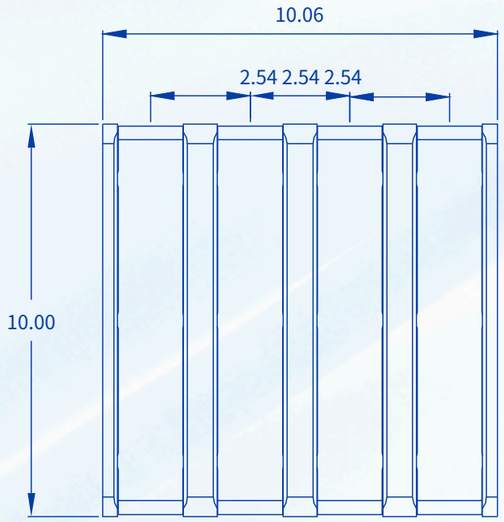

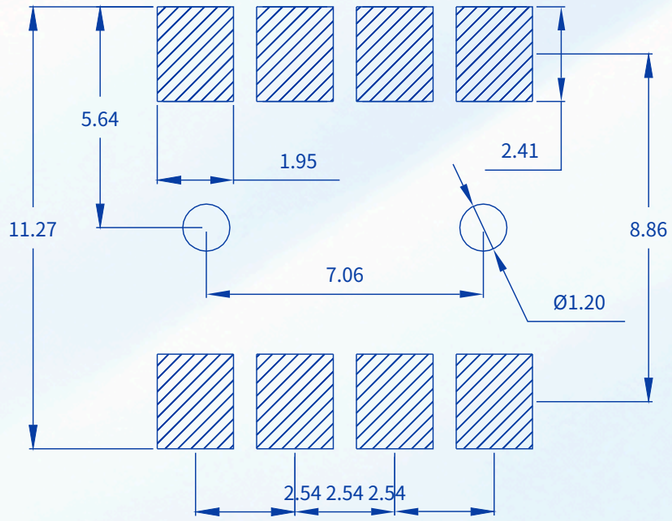



MATERIAL / SPECIFICATION	
Current Rating	3.0A
Voltage Rating	60V
Dielectric Withstanding Voltage	500V
Contact Resistance	30 mΩ
Insulation Resistance	500 MΩ
Operating Temperature	-55°C~+125°C
Durability	10000 cycles min.
Insulator	PA9T
Contact	Brass C2680
Contact Plated	Gold 3U"

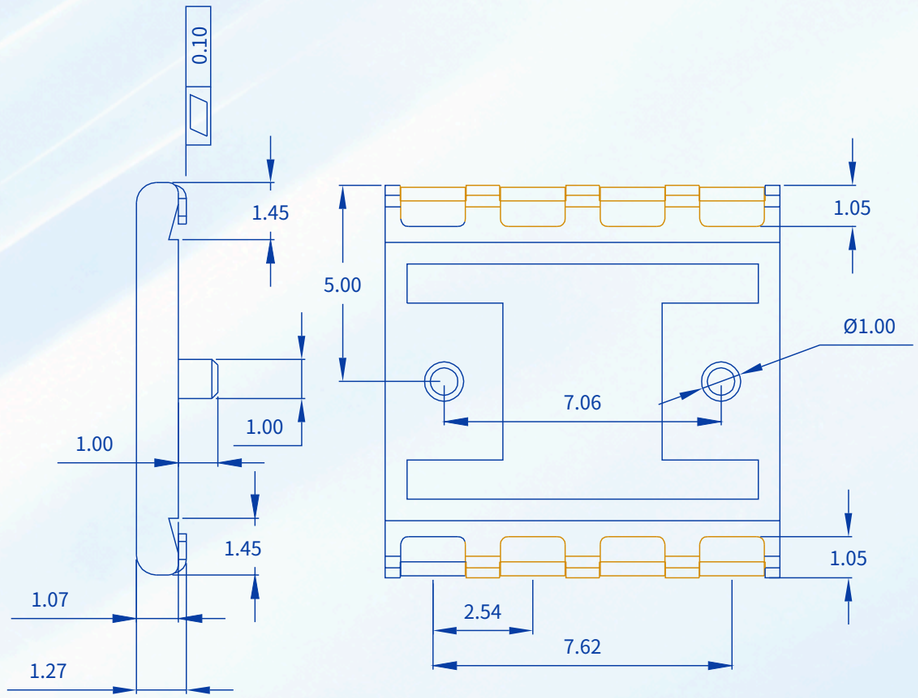

RECOMMENDED PCB LAYOUT

TOP VIEW(.XX±0.05)

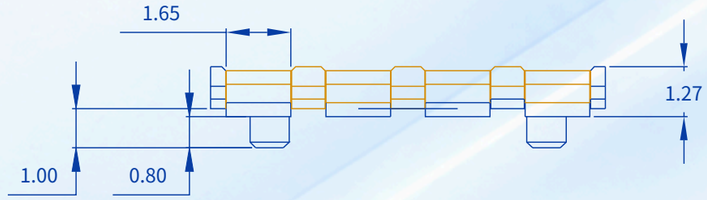

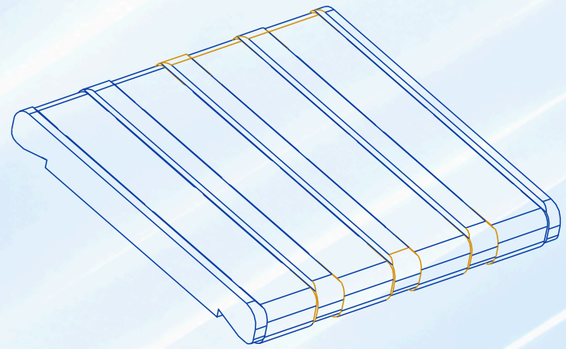

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.35
X.X	±0.25
X.XX	±0.15
X.XXX	±0.05

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.54 mm Pitch 1.27 mm Height SMT Female Spring Contact Battery Connector (4 Pin) With Locating Post						
PART NO.	KS-BC254-04F-127P					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1