

RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

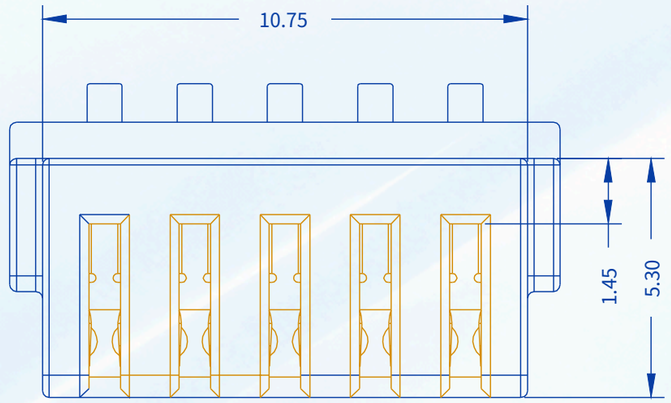


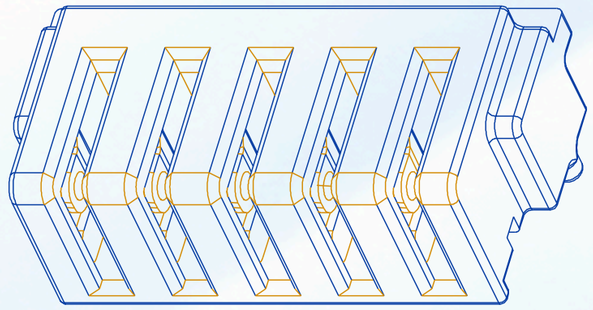


MATERIAL / SPECIFICATION	
Housing	THERMOPLASTIC, UL94 V-0
Color	BLACK
Contact	COPPER ALLOY T=0.50mm
Finish (contact area)	1u" GOLD PLATING ON CONTACT AREA
Finish (solder tails)	G/F PLATING ON SOLDERTAILS
Underplating	50u" MIN. NICKEL UNDERPLATING OVER ALL

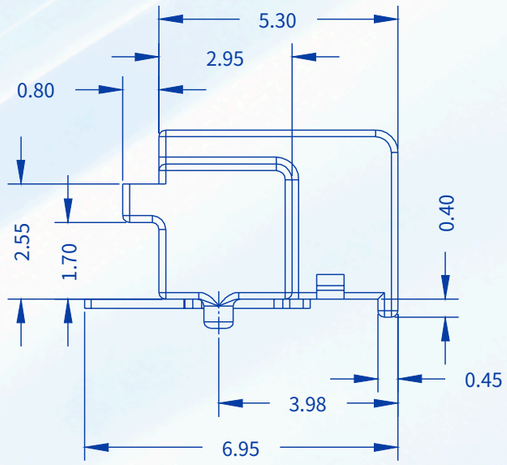

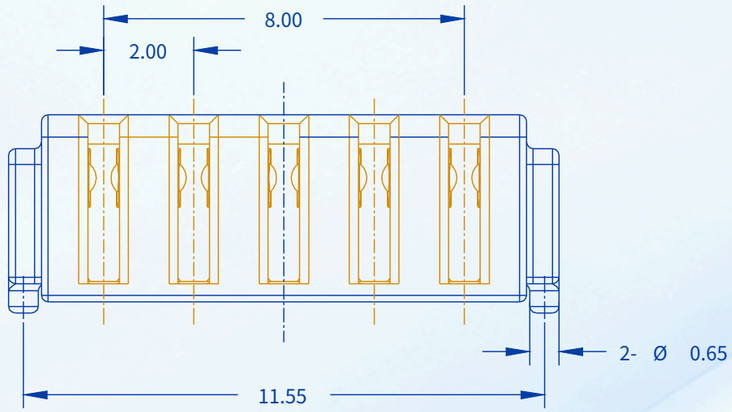

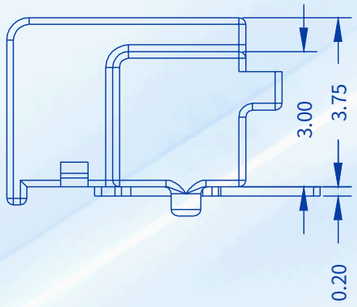

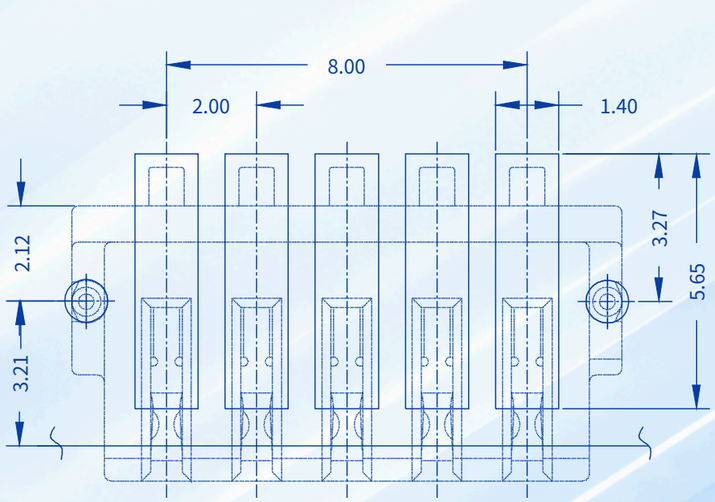

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGULAR	±1°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch 3.9 mm Height SMT Female Blade Battery Connector (5 Pin)						
PART NO.	KS-BL200-05F-S390					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1