



NOTE:
Material
Insulator: LCP
Contact: C2680
Contact Plated: Gold over Nickel or Tin
Specification
Current Rating: 12A
Instant Current: 15A
Rated Voltage: 12V
Contact Resistance: 30mΩ
Insulation Resistance: 100MΩ
Dielectric Voltage: 500V
Operdting Temperature: -40° ~105°

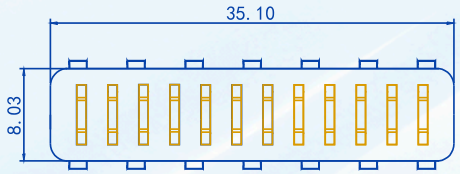




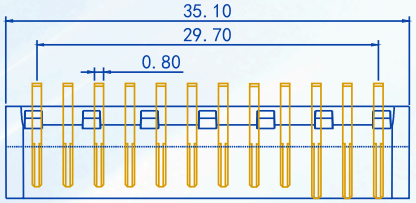

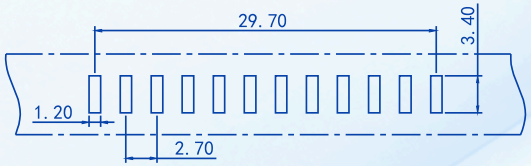

RECOMMENDED PCB LAYOUT
T=0.65MM, TOLERANCES±0.05MM

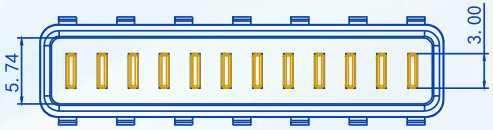

NO.	PARTS	MATERIAL	QTY.	FINISHING
2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C2680	12	Au PLATED

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
UP TO 5 ±0.2 ANGLE ±3°
ABOVE 5-30 ±0.3
ABOVE 30 ±0.5

DESIGN		DATE		TITLE: 电池连接器
APPROVED		DATE		
MODEL: KS-12Pin-R1-R2		REV:	SCALE:	UNIT: mm
		SIZE: A4	SHEET: 1/1	