

RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

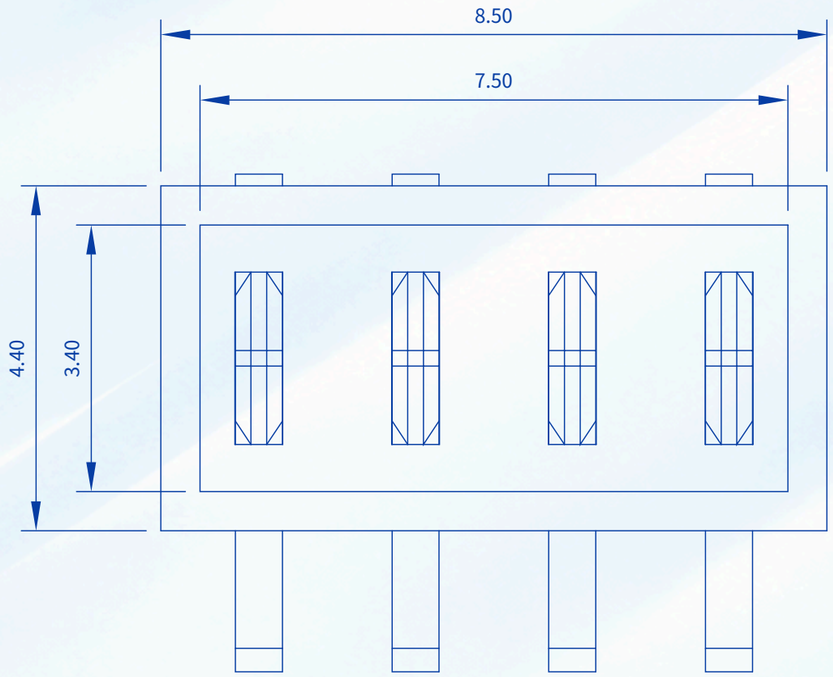

MATERIAL / SPECIFICATION	
Housing	LCP 30%G/F UL94V-0, BLACK
Contact	COPPER ALLOY T=0.6mm
Finish	1u" GOLD PLATING ON CONTACT AREA
Solder tails	G/F PLATING
Underplating	50u" MIN. NICKEL OVER ALL

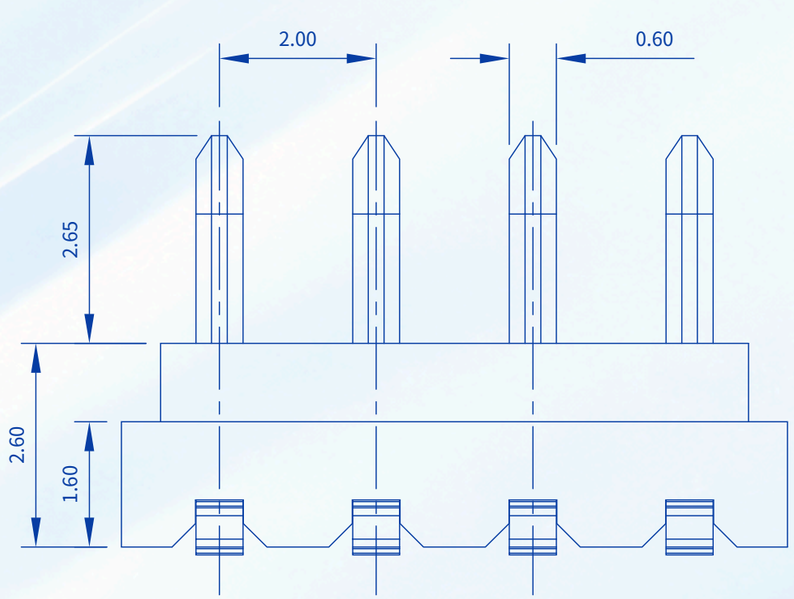

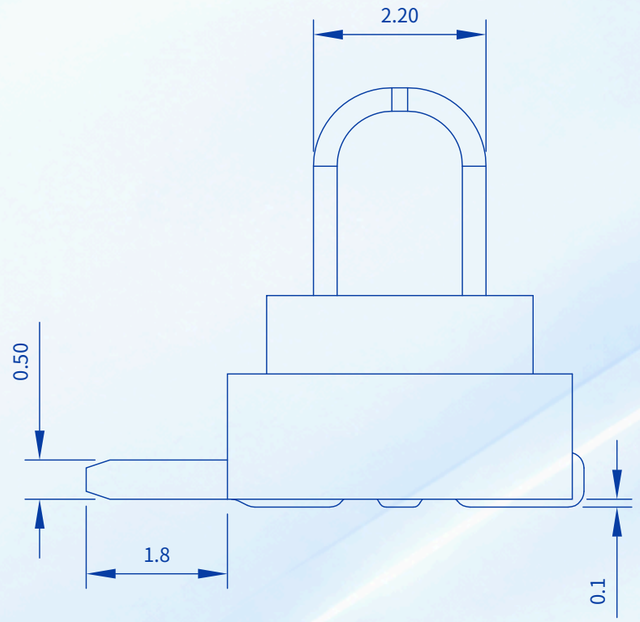

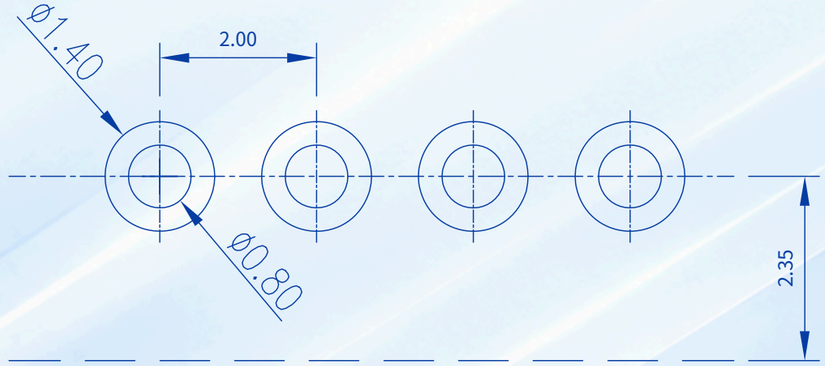

RECOMMEND PCB LAYOUT

TOLERANCE: ±0.05

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.50
X.X	±0.38
X.XX	±0.25
X.XXX	±0.13
X.°	±10°
X.X°	±5°
X.XX°	±2°
X.XXX°	±0.5°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch Right-Angle Through-Hole Male Blade Battery Connector (4 Pin)						
PART NO.	KS-BL200-04M-RD					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1