


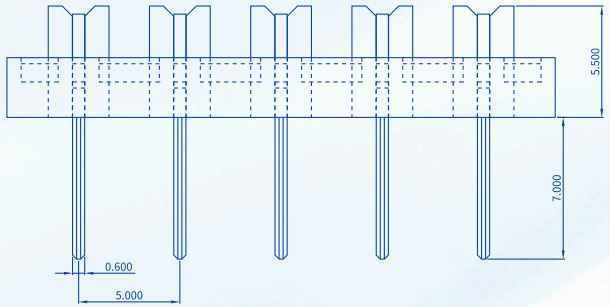


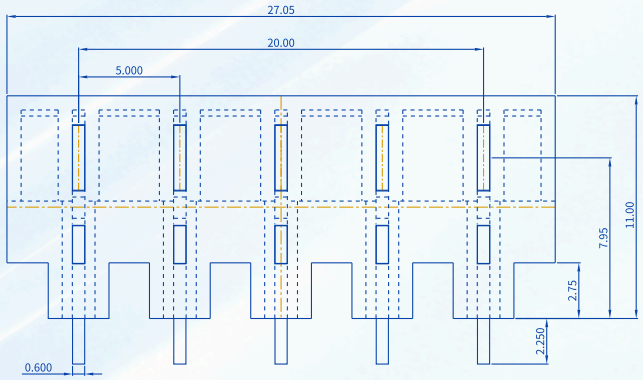

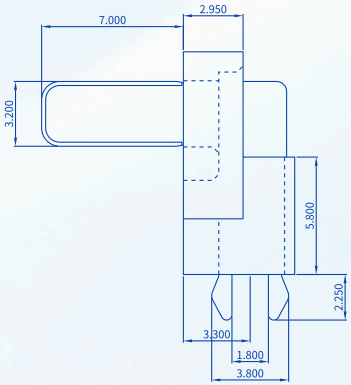

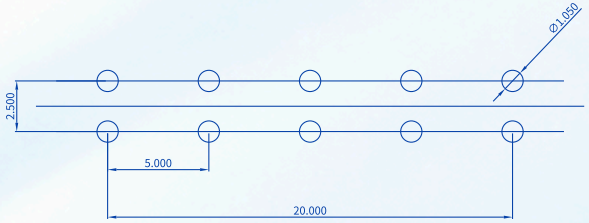

NOTE:
1. MATERIAL:
1.1 HOUSING: PA9T, UL 94V-0
1.2 TERMINAL: C2680
2. FINISH:
2.1 Plated：Gold over Nickel or Tin
3. PRODUCT SPECIFICATION
3.1 CURRENT RATING :10A
3.2 VOLTAGE RATING : 125V AC
3.3 DIELECTRIC WITHSTANDING VOLTAGE:500VAC
3.4 INSULATION RESISTANCE: 100MΩ min.
3.5 CONTACT RESISTANCE: 30mΩ Max.
3.6 Operating Temperature: -40° ~105°

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.30 ANGULAR ±2° X.X ±0.20 X.XX ±0.15	DESIGN		DATE	TITLE: 电池连接器
	APPROVED		DATE	
	MODEL: 5.0间距公座-5P-90度旧款	REV:	SCALE:	UNIT: mm
		SIZE: A4	SHEET: 1/1	