



RoHS Compliant



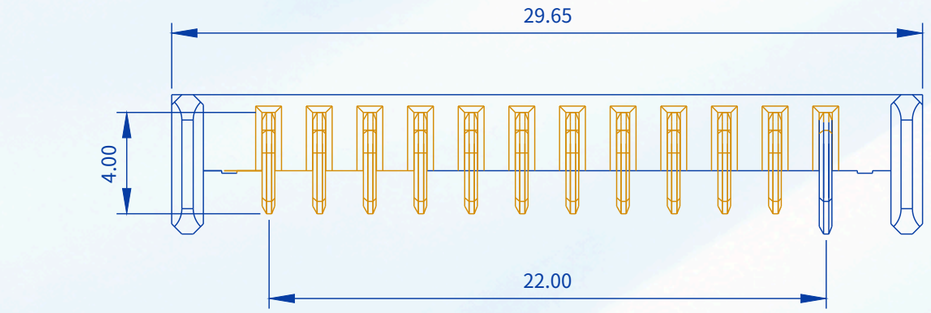

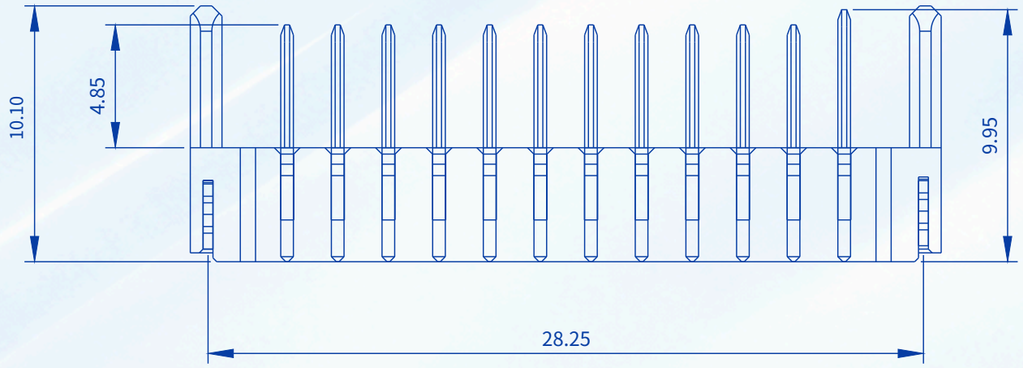

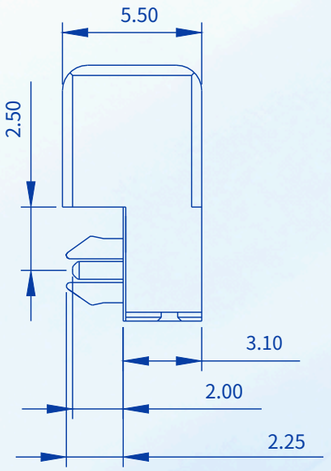

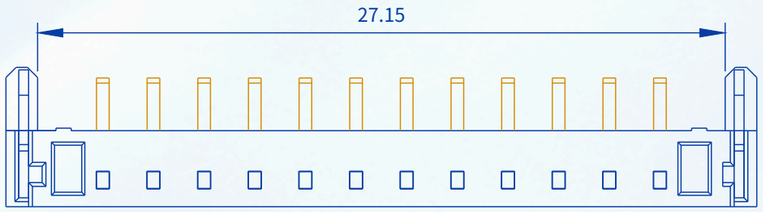

Recommended P.C.B Layout

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

Dimension				
No. of Pins	DIM.A	DIM.B	DIM.C	DIM.D
04	13.65	11.15	6.00	12.26
05	15.65	13.15	8.00	14.26
06	17.65	15.15	10.00	16.26
07	19.65	17.15	12.00	18.26
08	21.65	19.15	14.00	20.26
09	23.65	21.15	16.00	22.26
10	25.65	23.15	18.00	24.26
11	27.65	25.15	20.00	26.26
12	29.65	27.15	22.00	28.26

MATERIAL / SPECIFICATION	
Housing	PA9T, UL 94V-0
Terminal	C2680
Terminal Finish	Nickel 50 u" min under plated
Contact Area	Au plated
Soldering Area	Tin
Current Rating	5 A
Voltage Rating	30 V AC
Dielectric Withstanding Voltage	500 VAC
Insulation Resistance	100 MΩ min.
Contact Resistance	30 mΩ max.
Operating Temperature	-40° ~ 105°
BOM: Housing	NYLON 9T; Qty 1; BLACK
BOM: Contact Terminal	PHOSPHOR BRONZE; Qty 9; Au PLATED

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
Up to 5	±0.2
Above 5 ~ 30	±0.3
Above 30	±0.5
Angle	±3°

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch Right-Angle Through-Hole Male Blade Battery Connector (12 Pin)						
PART NO.	KS-BL200-12M-RD-04					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1