



RoHS Compliant

REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

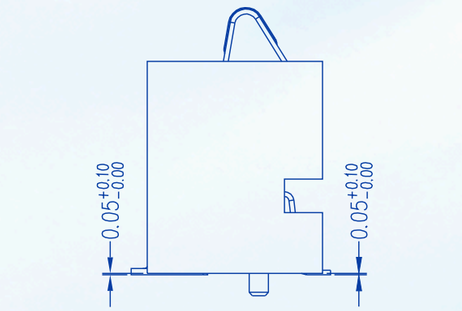

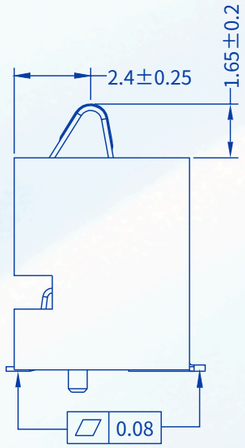


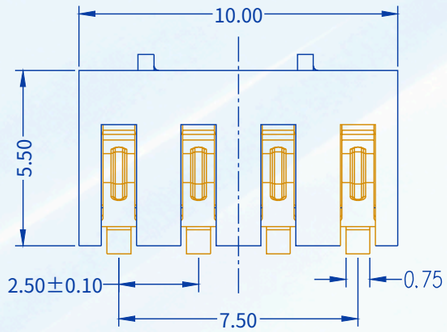


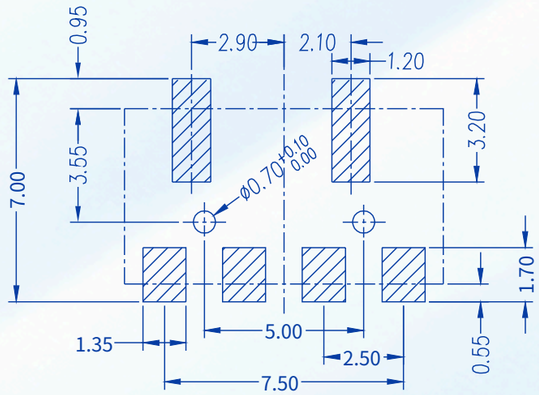



RECOMMENDED PCB LAYOUT

TOL:(±0.05)

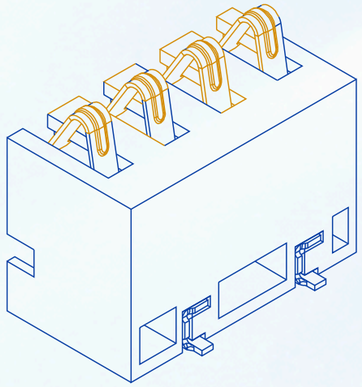

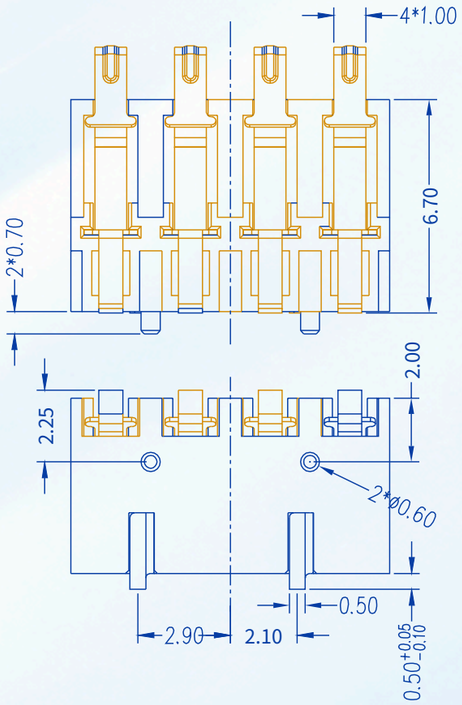



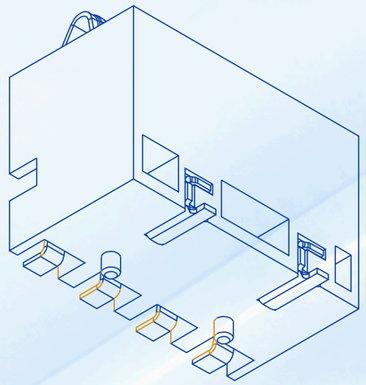

MATERIAL / SPECIFICATION	
Current Rating	2.0A
Voltage Rating	12V
Dielectric Withstanding Voltage	500V
Contact Resistance	30 mΩ
Insulation Resistance	500 MΩ
Operating Temperature	-40°C~+125°C
Insulator	LCP E130i UL94-VO E106764
Insulator Color	Black
Contact	Tin Phosphor Bronze
Contact Plated	Contact area Au 3μ", solder tail Au 1μ", Ni 50-80μ"
Fixing Tab	Brass C2680
Fixing Tab Plated	Matte Tin 100μ" min. over Ni 50-80μ"

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.X	±0.25
X.XX	±0.15
X.XXX	±0.05

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.5 mm Pitch 6.7 mm Height SMT Spring Contact Battery Connector (4 Pin) With Locating Post Top-Contact						
PART NO.	KS-BC250-04T-670P-01					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1