

RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

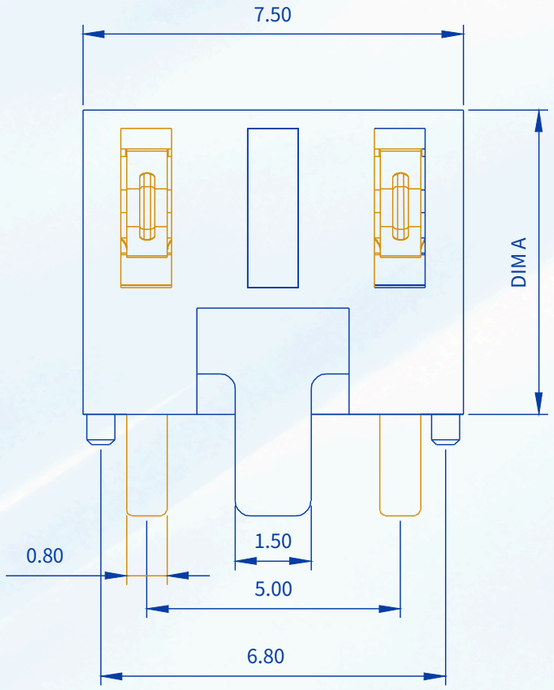

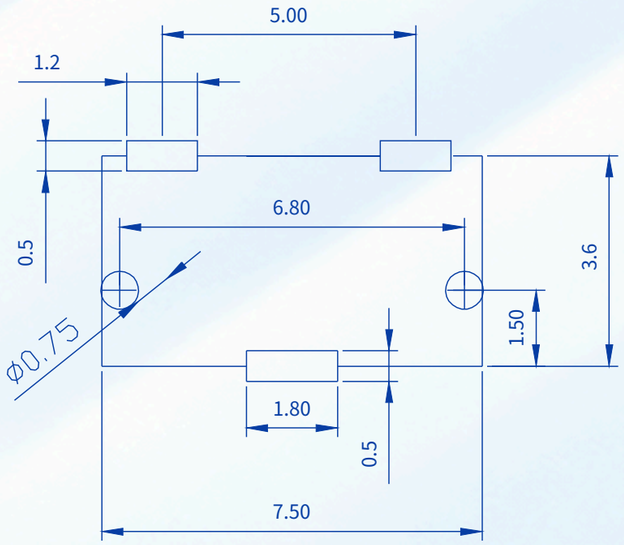


PART NO.	DIM A	DIM B	DIM C
BC-75-2PD540C	5.4	3.8	4.6
BC-75-2PD600C	6.0	4.4	5.2
BC-75-2PD700C	7.0	5.4	6.2
BC-75-2PD800C	8.0	6.4	7.2

MATERIAL / SPECIFICATION	
Current Rating	2.0A
Voltage Rating	12V
Dielectric Withstanding Voltage	500V
Contact Resistance	30 mΩ
Insulation Resistance	500 MΩ
Operating Temperature	-40°C~+85°C
Insulator	LCP
Contact	Phosphor Bronze
Contact Plated	Gold

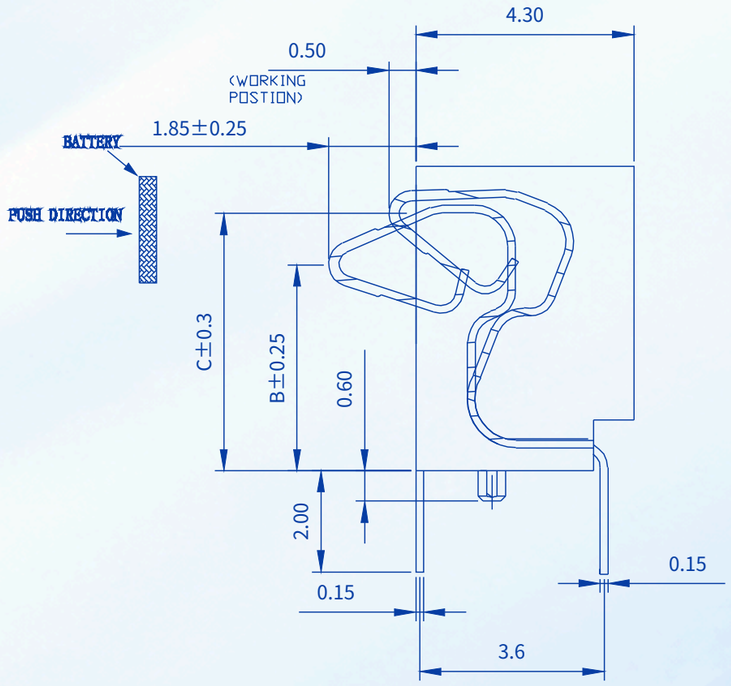

RECOMMENDED PCB LAYOUT

TOP VIEW(.XX±0.05)

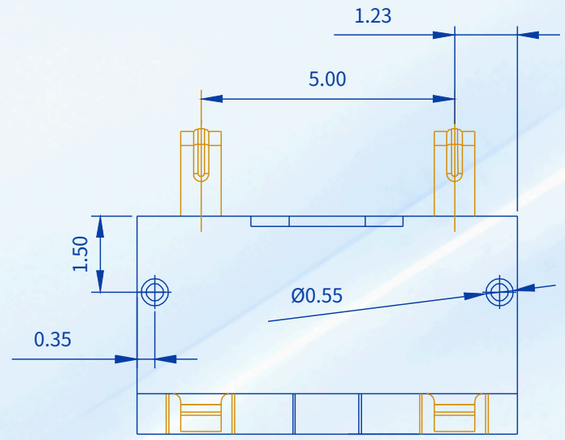

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.35
X.X	±0.25
X.XX	±0.15
X.XXX	±0.05

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	5 mm Pitch 5.4/8.0 mm Height Through-Hole Spring Contact Battery Connector (2 Pin) With Locating Post Side-Contact						
PART NO.	KS-BC500-02S-DP					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1