


RoHS Compliant

REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

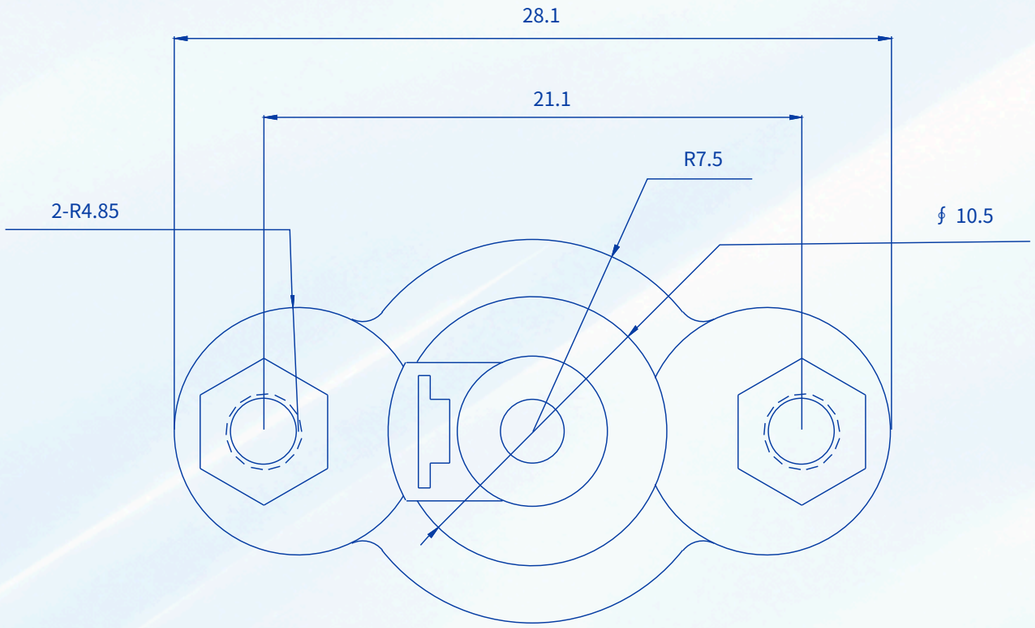

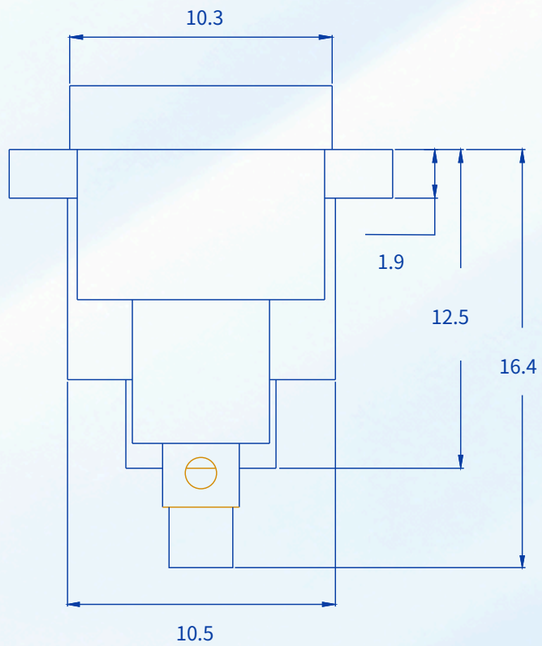

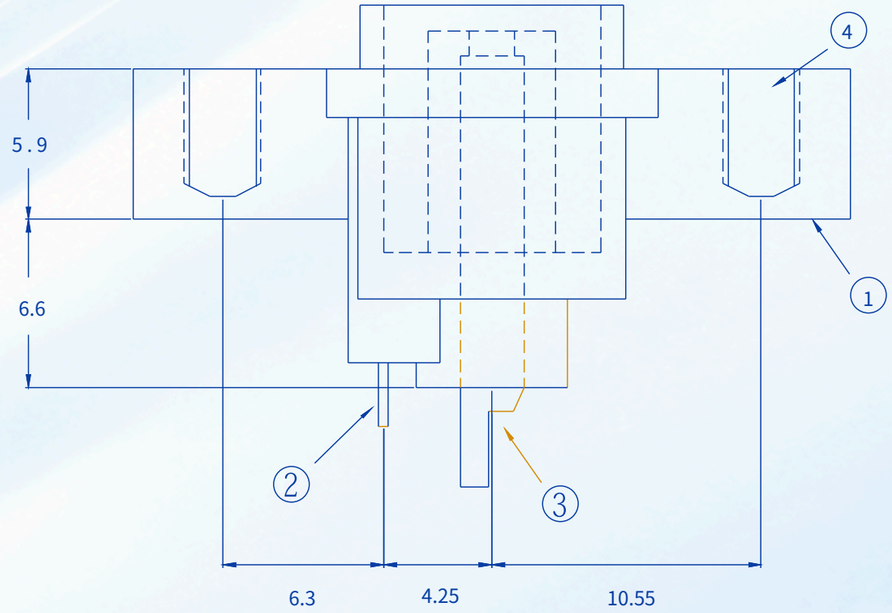



Technical Performance		
Item	Specification	Tolerance
Rated Load	DC 30V 3.0A	X. ±0.20
Contact Resistance	⩽30 mΩ	.X ±0.10
Insulation Resistance	⩾100 MΩ	.XX ±0.05
Withstanding Voltage	AC500V(50Hz)/min	.XXX ±0.02
Insertion/Extraction Force	3-20N	X° ±5°
Operating Temperature	-30 to 70°C	.X° ±2°
Life	5000 cycles	.XX° ±1°

MATERIAL / SPECIFICATION	
BOM: Threaded Post	Qty 1; H62 BRASS ROD
BOM: Center Pin	Qty 1; H62 BRASS ROD; Remark 0.3T; Silver plated
BOM: Spring Piece	Qty 1; PHOSPHOR BRONZE; Remark 0.4T; Silver plated
BOM: Base	Qty 1; PA; Remark Black

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	
		APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	DC Panel Mount Power Jack DC-134 10.5 mm Opening		
PART NO.	KS-DC-134	REV.	A0
SCALE	NTS	UNIT	mm
SIZE	A3	SHEET	1/1