

RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

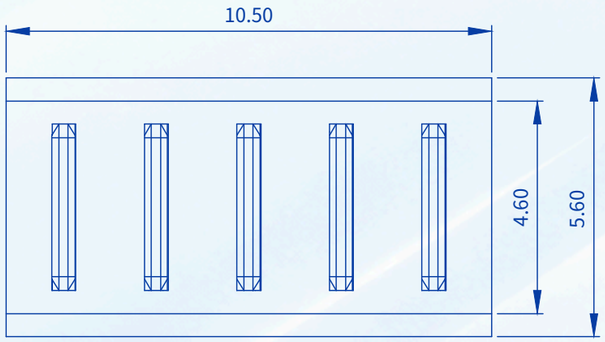


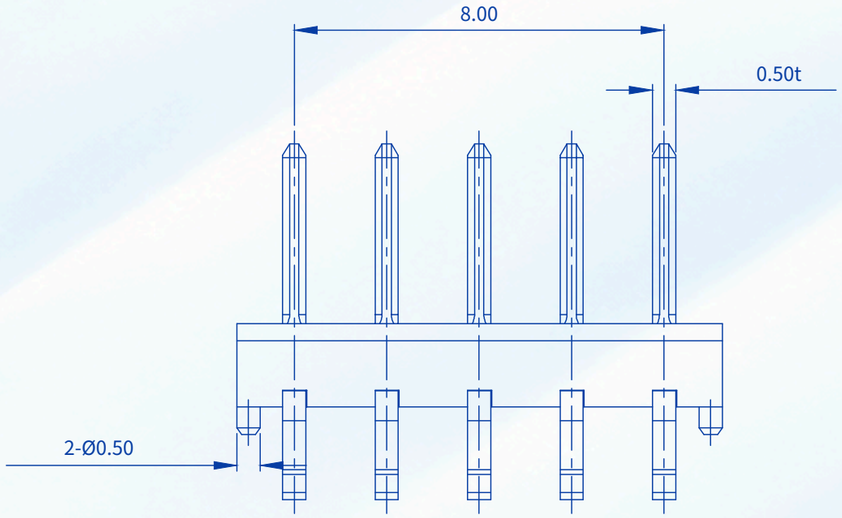


MATERIAL / SPECIFICATION	
Housing	THERMOPLASTIC, UL94 V-0, BLACK
Contact	COPPER ALLOY T=0.50mm
Contact plating	1u" GOLD PLATING ON CONTACT AREA
Solder tails	G/F PLATING
Underplating	50u" MIN. NICKEL OVER ALL
Draft	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

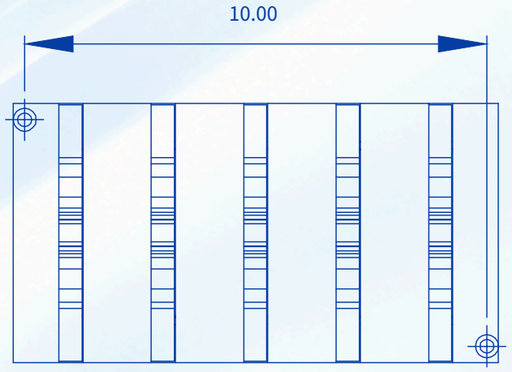

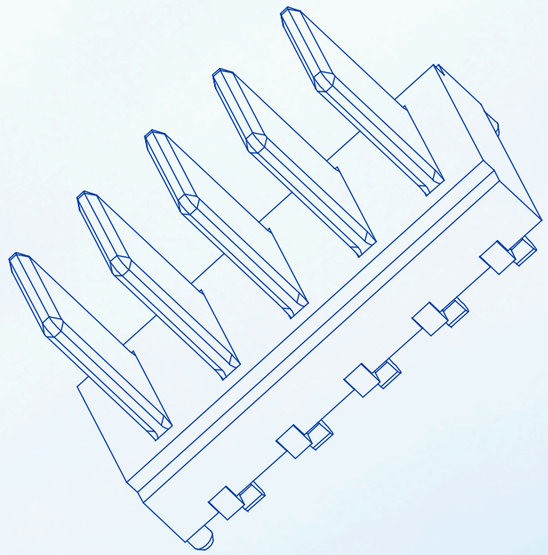

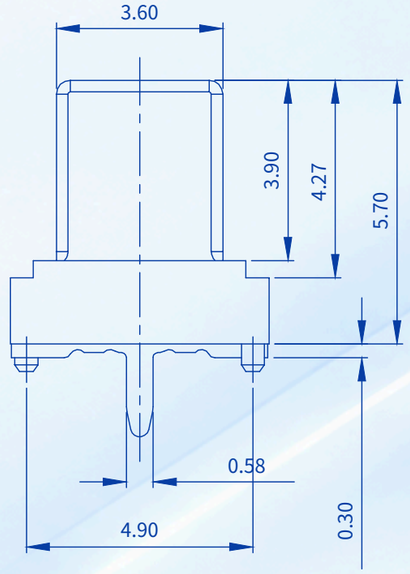

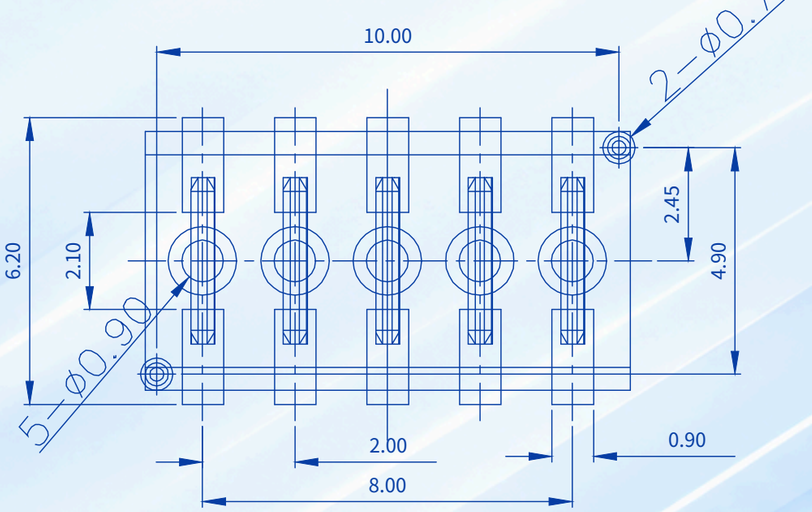


P.C.B LAYOUT

TOLERANCE:±0.05

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
.X (mm)	±0.25
.XX (mm)	±0.15
.XXX (mm)	±0.05
.X (inch)	±---
.XX (inch)	±---
.XXX (inch)	±---
Angular	±1°

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch 5.7 mm Height Vertical SMT Male Blade Battery Connector (5 Pin)						
PART NO.	KS-BL200-05M-VS570					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1