

RoHS Compliant

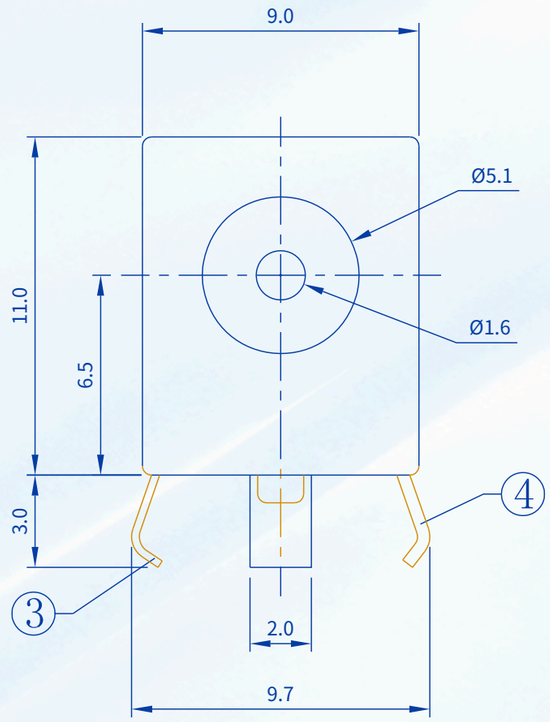


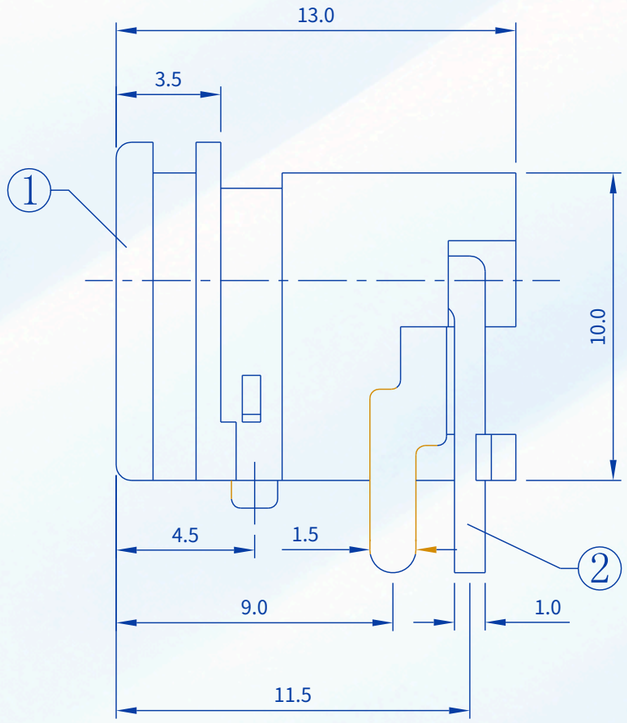

线路板开孔尺寸


P.C.B

LAYOUT

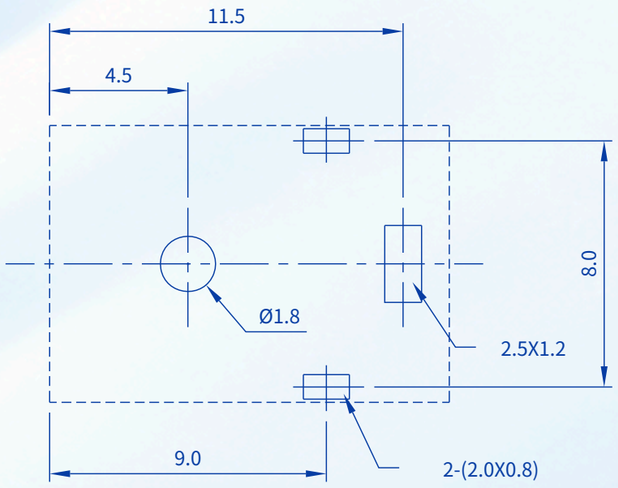

按点示意图

SCHEMATIC




REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

MATERIAL / SPECIFICATION	
Rated Load	DC 30V 0.3A
Contact Resistance	⩽30 mΩ
Insulation Resistance	⩾100 MΩ (DC250V)
Withstanding Voltage	500VAC
Insertion/Extraction Force	3-20N
Life	5,000 cycles
BOM: Bent Piece	BRASS; Qty 1; Silver plated
BOM: Spring Piece	STAINLESS; Qty 1; Silver plated
BOM: Flat Pin	BRASS; Qty 1; Silver plated
BOM: Base	NYLON/PBT; Qty 1

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
TOLERANCE	±0.20
ANGLES	±0.5°

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司

Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	DC Right-Angle Through-Hole Power Jack DC-039 5.1 mm Opening 1.6 mm Center Pin						
PART NO.	KS-DC-039					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1