


RoHS Compliant


REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

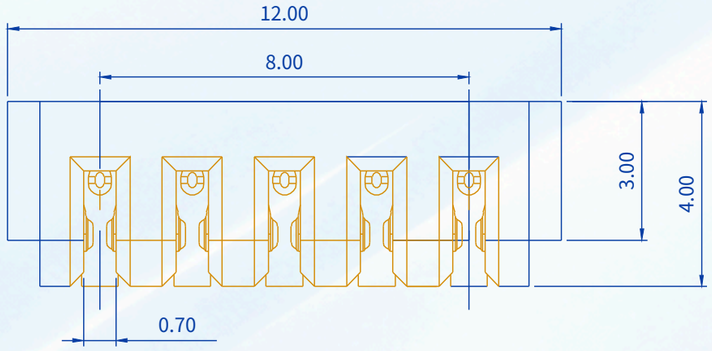


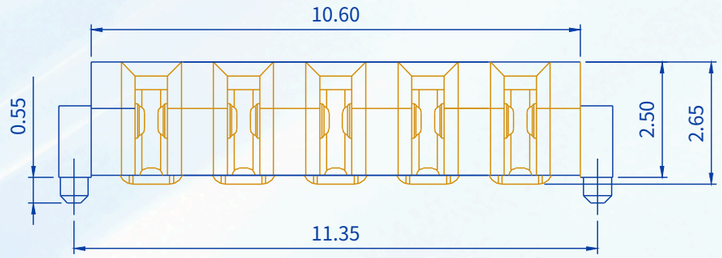

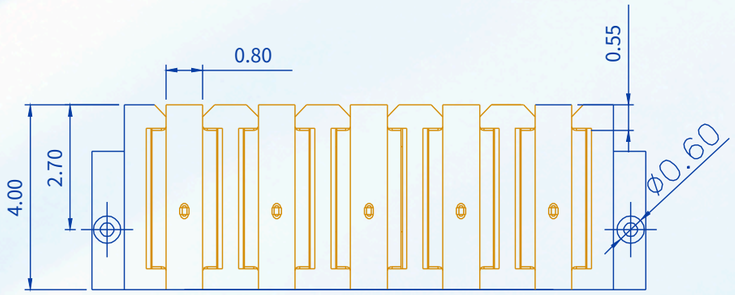

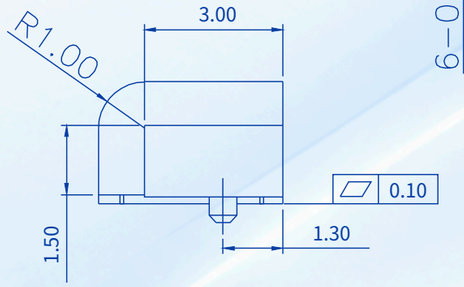

MATERIAL / SPECIFICATION	
Housing	PA9T (UL94V-0)/LCP
Color	BLACK
Terminal	COPPER ALLOY T=0.20mm
Voltage Rating	30V (Max) AC/DC
Dielectric Withstanding Voltage	AC 1KV for 1 minute, no damage between adjacent terminals
Insulation Resistance	1000 MΩ, 500V DC/1 minute between adjacent terminals
Operating Temperature	-25°C~+80°C

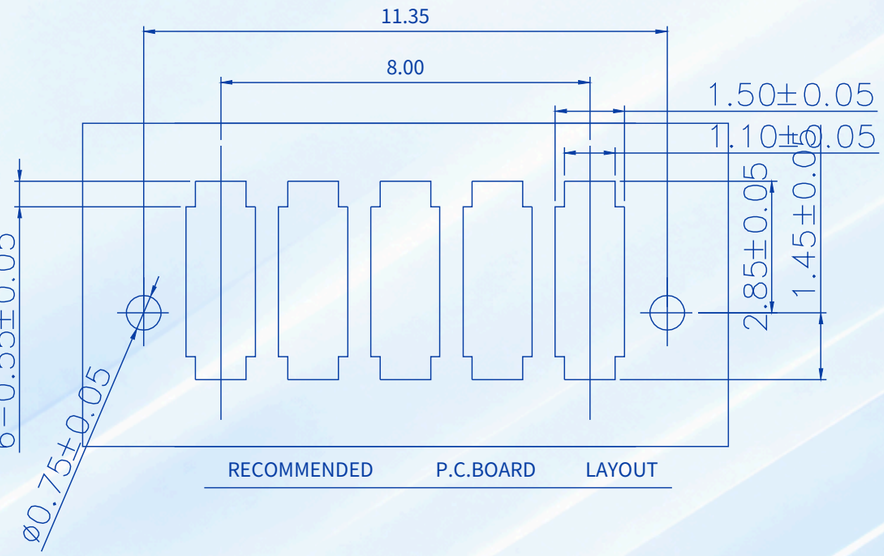

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGULAR	±1°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch 2.5 mm Height SMT Female Blade Battery Connector (5 Pin) With Locating Post						
PART NO.	KS-BL200-05F-S250P					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1