
RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

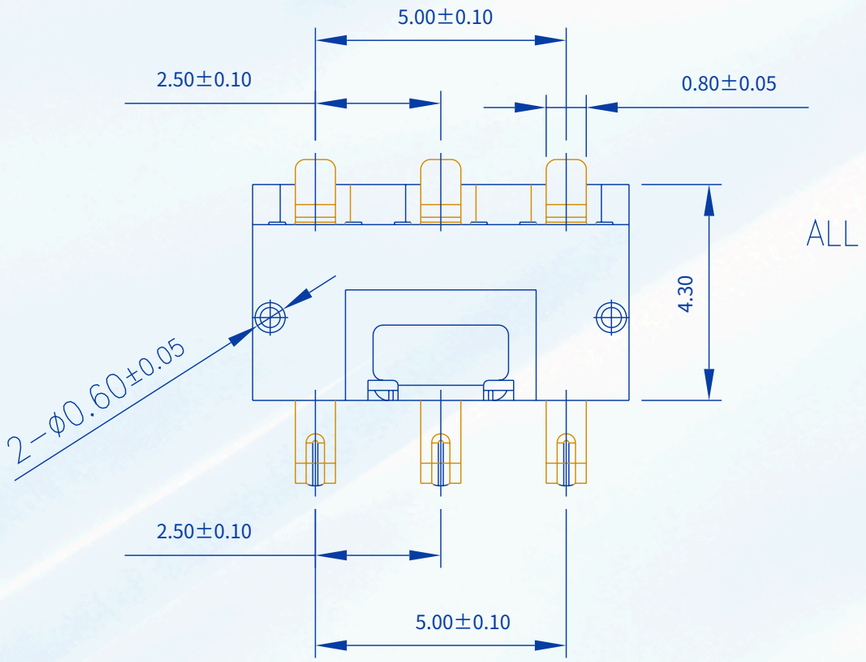

ALL


Dimension		
H	DIM A	DIM B
5.4	5.4	4.4
6.0	6.0	4.7
6.5	6.5	5.2
7.0	7.0	5.6
7.5	7.5	6.5
8.0	8.0	6.7
8.5	8.5	7.2

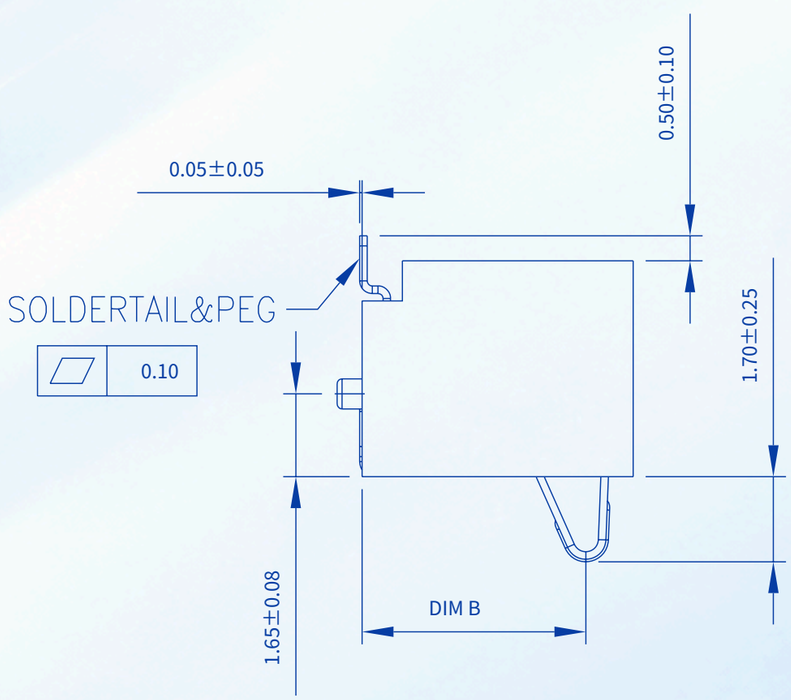

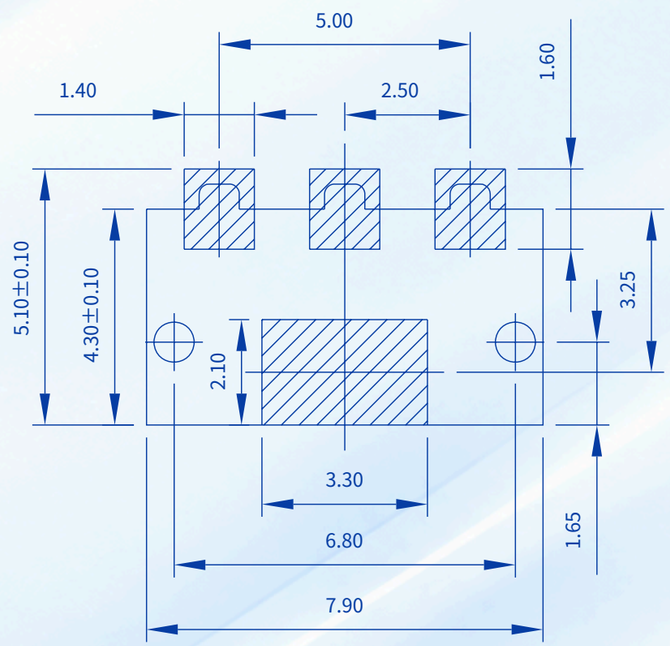

RECOMMENDED PCB LAYOUT

TOP VIEW(.XX±0.05)

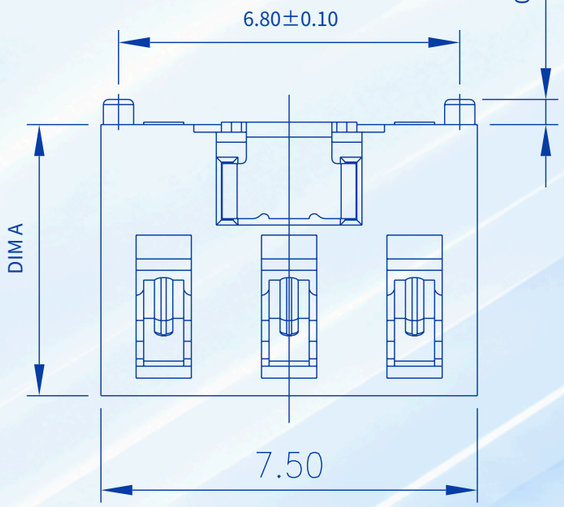

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.15
X.X	±0.10
X.XX	±0.05
X.XXX	±0.005
X.°	±1°
X.X°	±0.5°
X.XX°	±0.05°
X.XXX°	±0.005°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.5 mm Pitch 5.4/6.0/7.0/8.0 mm Height SMT Spring Contact Battery Connector (3 Pin) With Locating Post Side-Contact						
PART NO.	KS-BC250-03S-P-01					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1