


RoHS Compliant

REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG	Mahu	Jlan

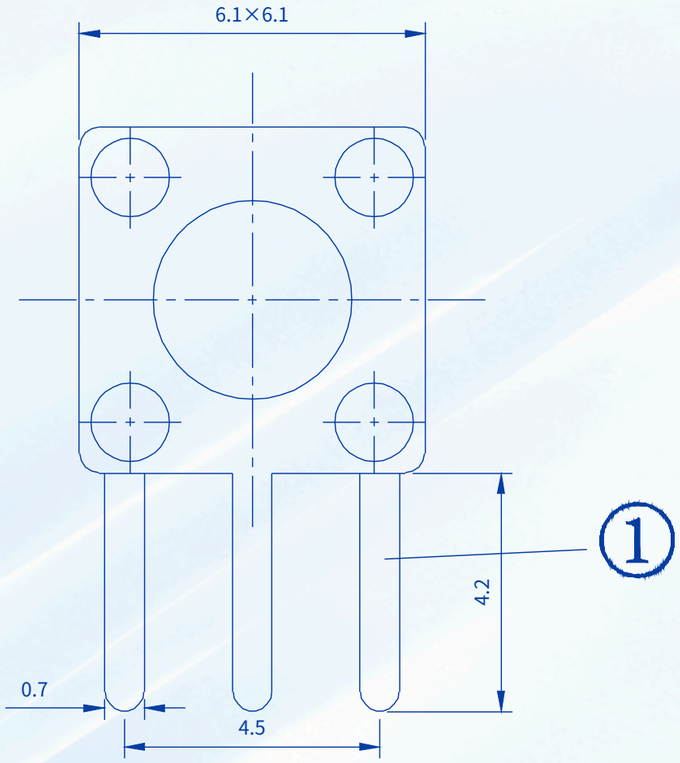


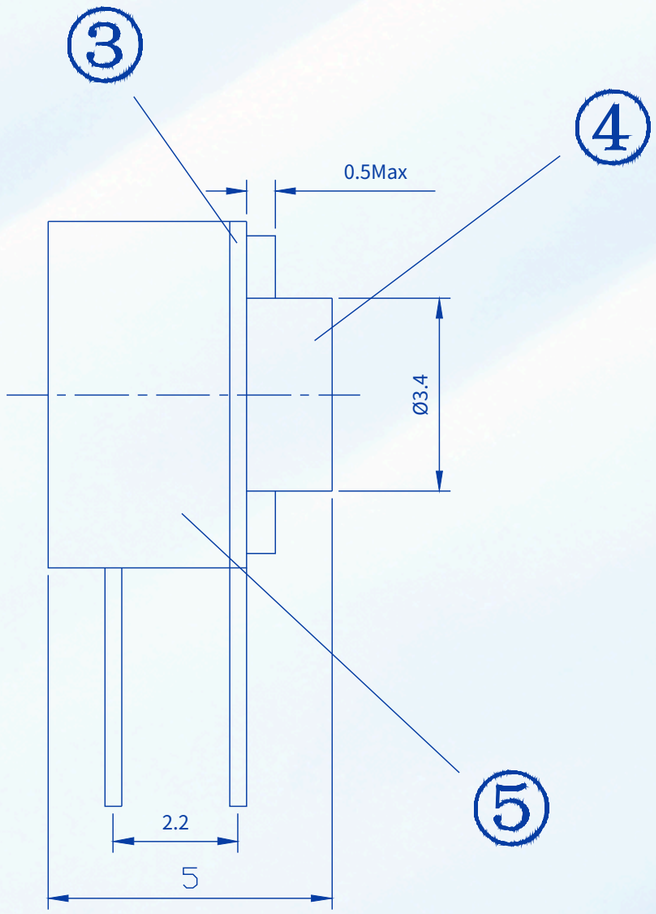


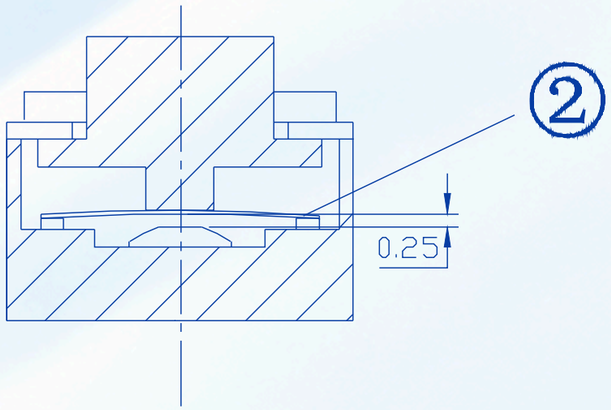

按点示意图

MATERIAL / SPECIFICATION	
Operating Temperature	-25°C~+85°C
Rating	DC 12V 0.1A
Contact Resistance	⩽0.03 Ω
Insulation Resistance	⩾100 MΩ
Dielectric Strength	AC 250V (50Hz)/min
Operating Force	260±30g
Mechanical Life	30,000 to 50,000 cycles
Appearance	Must be good, no rust, cracks or poor plating, etc.
BOM: Base	Qty 1; Reinforced Nylon; Black
BOM: Button	Qty 1; Reinforced Nylon; Black
BOM: Cover Plate	Qty 1; H62 Iron Strip T-0.25; Copper Tin
BOM: Contact Spring Piece	Qty 1; Korean Composite Silver T-0.07; Silver
BOM: Contact Pin	Qty 1; H62 Brass Strip T-0.35; Silver

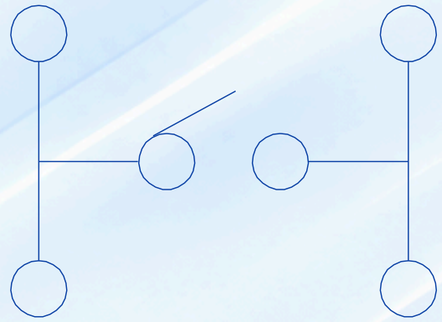

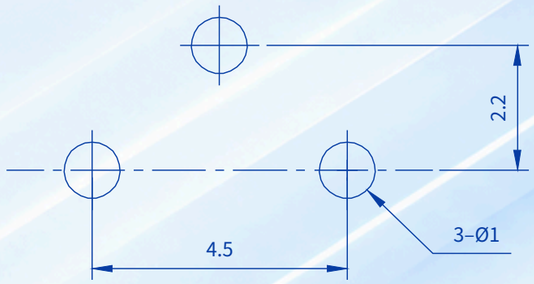

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)

Unmarked Linear Tolerance ±0.1mm

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	Mahu
APPROVED BY	Jlan

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Tactile Switch 6.1×6.1 Side 3 Pin Side-Actuated Through-Hole 5H						
PART NO.	KS-TS-6161-DR					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1