


RoHS Compliant


REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG	Mahn	Jlan

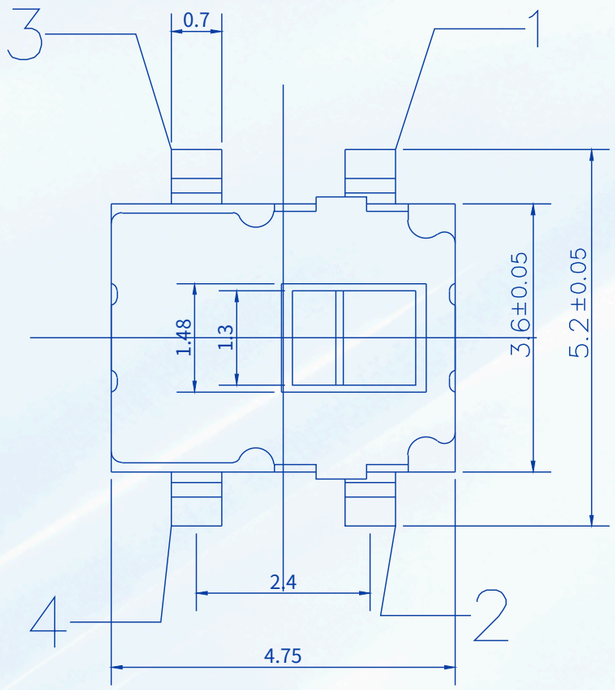


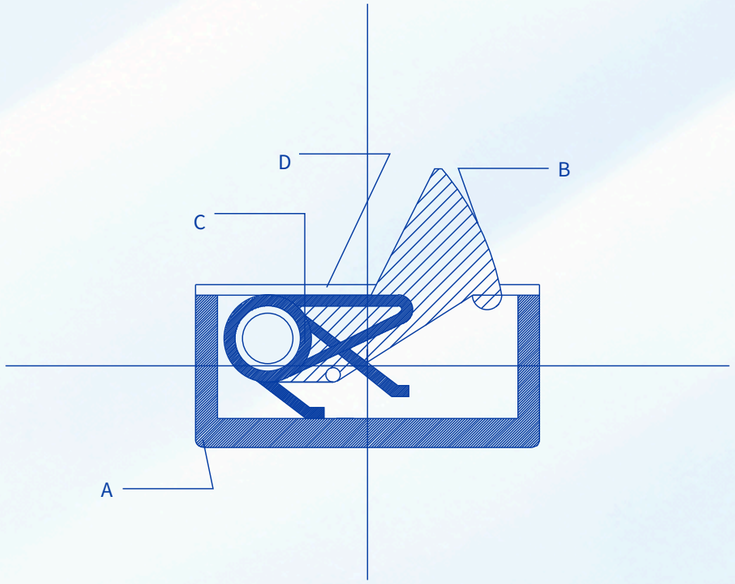


MATERIAL / SPECIFICATION	
Rated Range	50mA DC12V
Insulation Resistance	100 MΩ min (DC100V)
Dielectric Strength	AC100V (50/60Hz for 1 minute)
Mechanical Life	100,000 cycles
Operating Temperature	-10~+60°C
Operating Force	30±20gf
BOM: Insert	Qty 1; C5191-H; Silver White Silver Plated
BOM: Cover	Qty 1; SUS301-H; Silver White
BOM: Spring	Qty 1; SUS304-H; Silver White
BOM: Peach Heart Handle	Qty 1; PA46 Reinforced Nylon; Black
BOM: Base	Qty 1; LCP; Black & Silver Plated

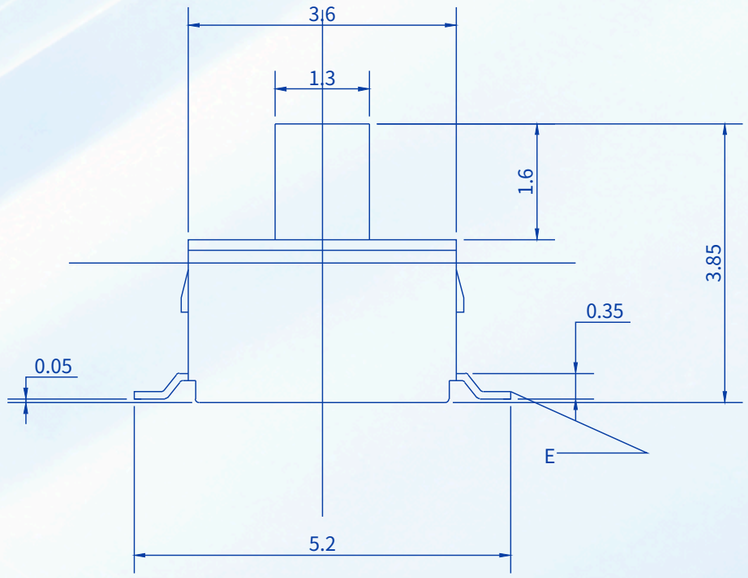

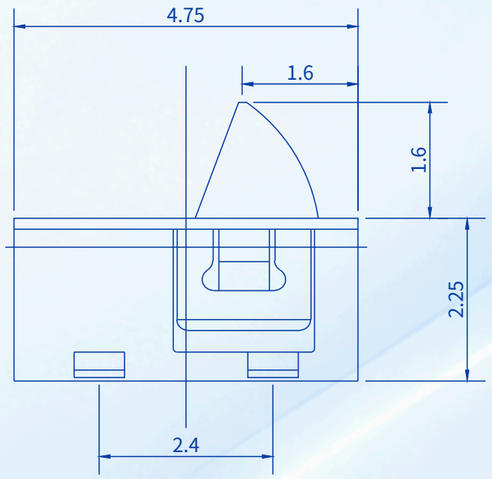

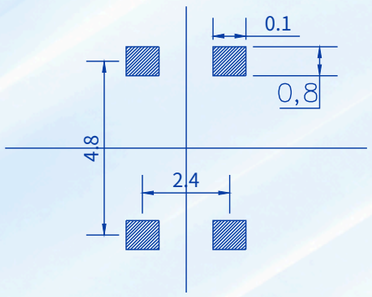

Schematic



GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	Mahn
		APPROVED BY	Jlan

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Detector Switch 4 Pin SMD Torsion Spring Lever								
PART NO.	KS-DS-TS-10-01							REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1		