


RoHS Compliant


REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

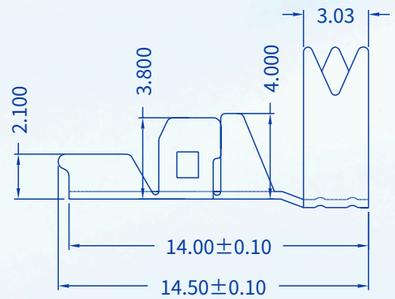





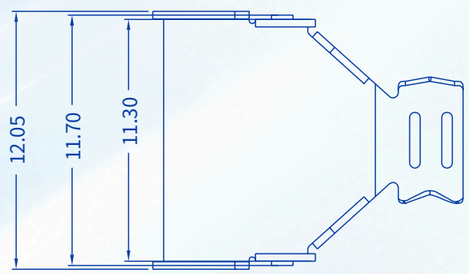




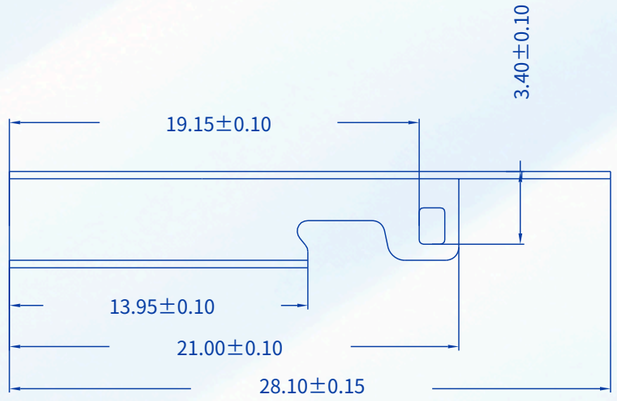

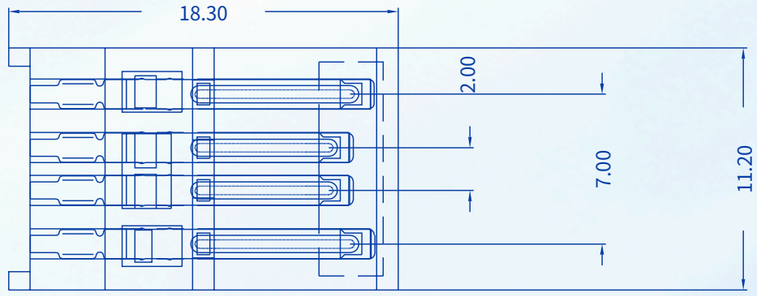

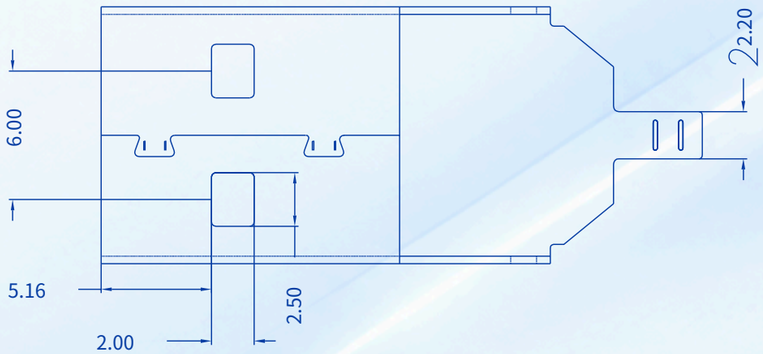

MATERIAL / SPECIFICATION	
Housing	Thermoplastics, UL94V-0
Contact	Copper Alloy
Shell	Copper Alloy/Steel
Voltage Current Rating	1.5 AMP, 30V AC
Insulation Resistance	1000 MΩ Min.
Contact Resistance	30 mΩ Max.
Dielectric Withstanding Voltage	500V AC
Temperature Range	-55°C to +85°C
Insulator Color	Black/White
Plastic Material	PBT/LCP
Shell Finish	Nickel plated/Tin-Lead plated
Contact Finish 01	Selective Gold Flash
Contact Finish 02	Selective Gold 3U"
Contact Finish 03	Selective Gold 5U"
Contact Finish 04	Selective Gold 15U"
Contact Finish 05	Selective Gold 30U"

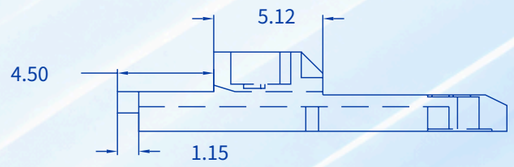

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
XXX	±0.10
XX	±0.20
X	±0.30
X°	±2°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	USB Type-A Wire-Solder Male Plug (4 Pin)						
PART NO.	KS-USA-04M-01					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1