

RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

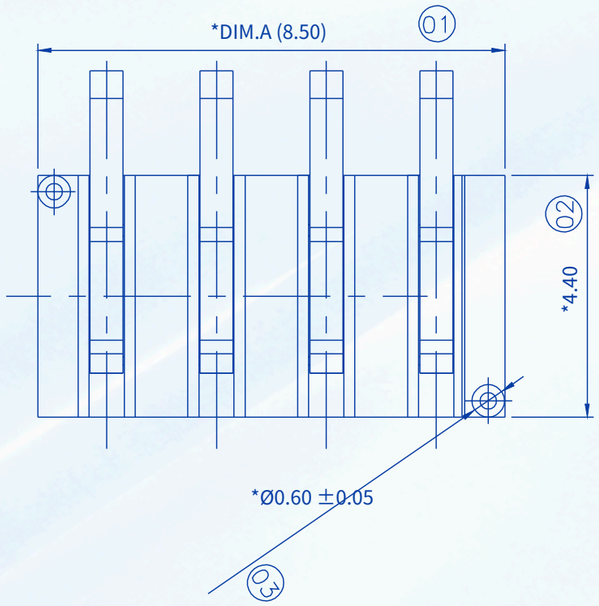


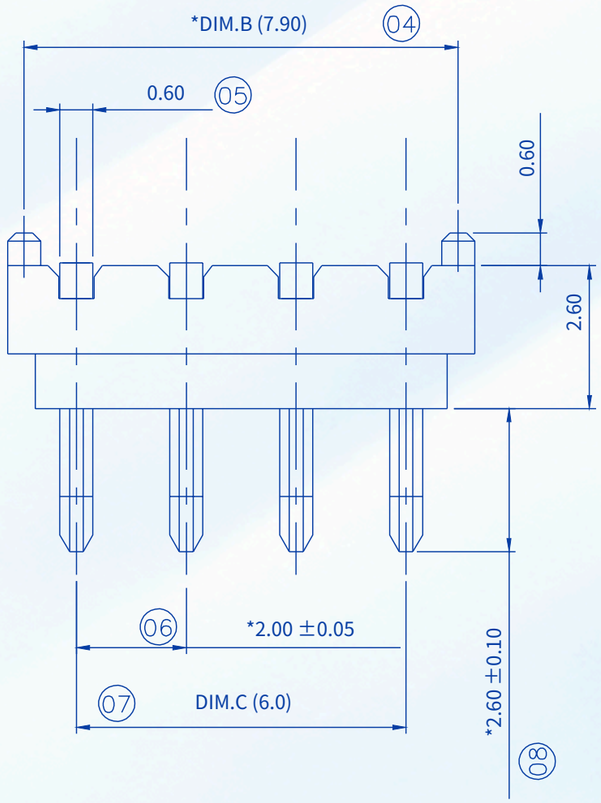

MATERIAL / SPECIFICATION	
Housing	LCP, Black
Contact	Brass, Gold Plated
Current Rating	5 A
Instant Current	7 A
Rated Voltage	AC/DC 30 V Max
Withstanding Voltage	AC 1000 V, 1 minute
Insulation Resistance	1000 MΩ min., DC 500 V, 1 minute
Operating Temperature	-20° to +80°


DIMENSION			
PIN	Dim.A	Dim.B	Dim.C
02pin	4.50	3.90	2.00
03pin	6.50	5.90	4.00
04pin	8.50	7.90	6.00
05pin	10.50	9.90	8.00
06pin	12.50	11.90	10.00
07pin	14.50	13.90	12.00
08pin	16.50	15.90	14.00
09pin	18.50	17.90	16.00
10pin	20.50	19.90	18.00

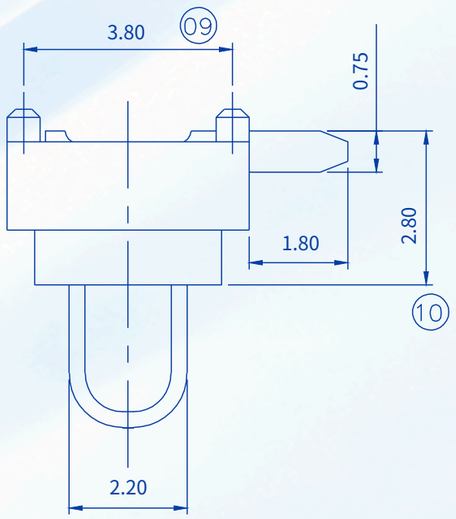

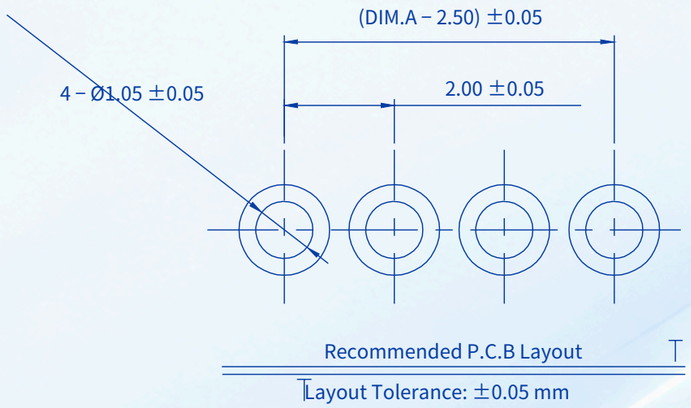

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.X	±0.25
X.XX	±0.15
X.XXX	±0.05
ANGULAR	±1°

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Mini 2 mm Pitch 2.6 mm Height Right-Angle Through-Hole Male Blade Battery Connector (2–10 Pin)						
PART NO.	KS-BL200-04M-RD260U-NN					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1