

RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

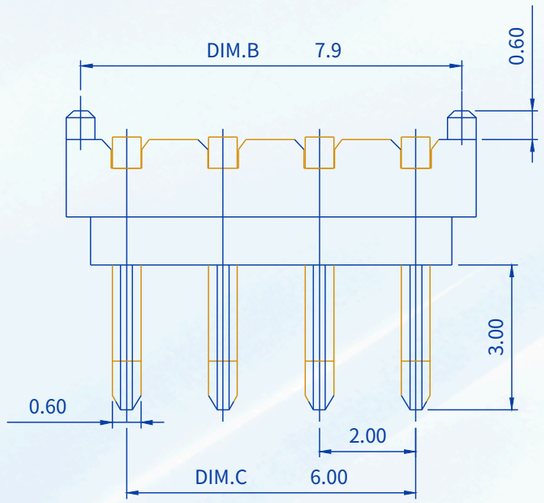


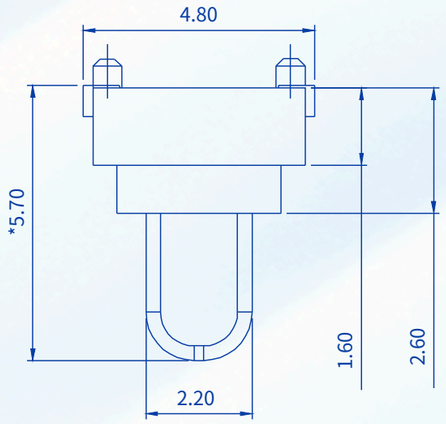

Dimension			
No. of Pins	DIM.A	DIM.B	DIM.C
03	6.50	5.90	4.00
04	8.50	7.90	6.00
05	10.50	9.90	8.00
06	12.50	11.90	10.00
07	14.50	13.90	12.00
08	16.50	15.90	14.00


MATERIAL / SPECIFICATION	
Housing	LCP 30% G/F UL94 V-0
Color	BLACK
Contact	COPPER ALLOY T=0.60mm
Finish (contact area)	3u" GOLD PLATING ON CONTACT AREA
Finish (solder tails)	G/F PLATING ON SOLDERTAILS
Underplating	50u" MIN. NICKEL UNDERPLATING OVER ALL

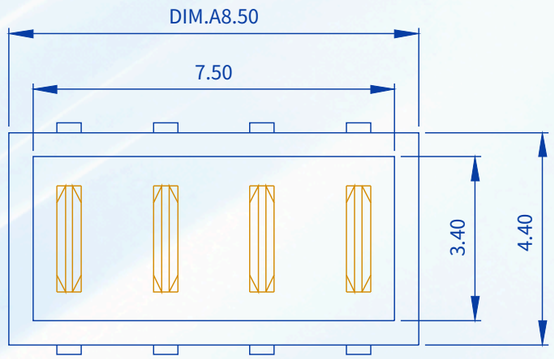


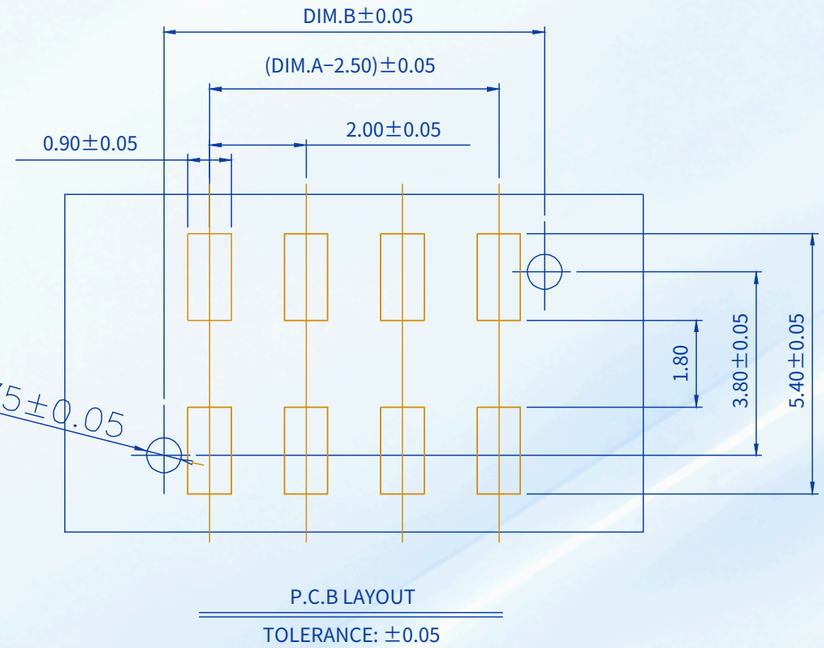

P.C.B LAYOUT

TOLERANCE: ±0.05

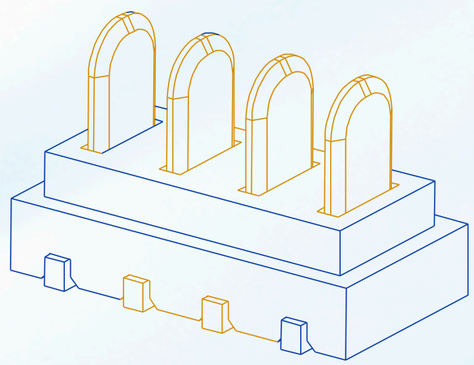

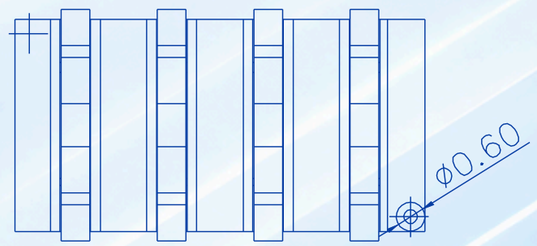

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGULAR	±1°

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch 5.7 mm Height Vertical SMT Male Blade Battery Connector (3–8 Pin) With Locating Post						
PART NO.	KS-BL200-04M-VS570P-NN					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1