
RoHS Compliant


REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		




SCHEMATIC

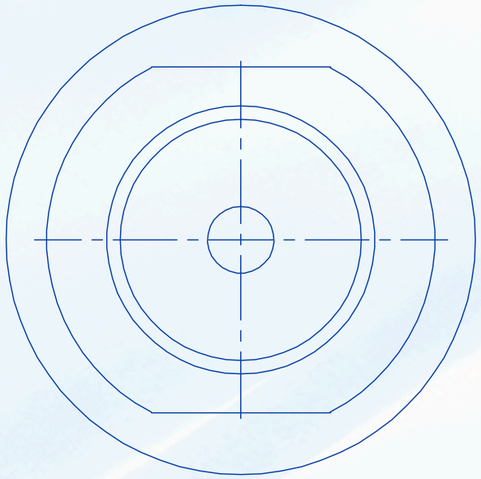

PIN Ø2.0, Ø2.5,

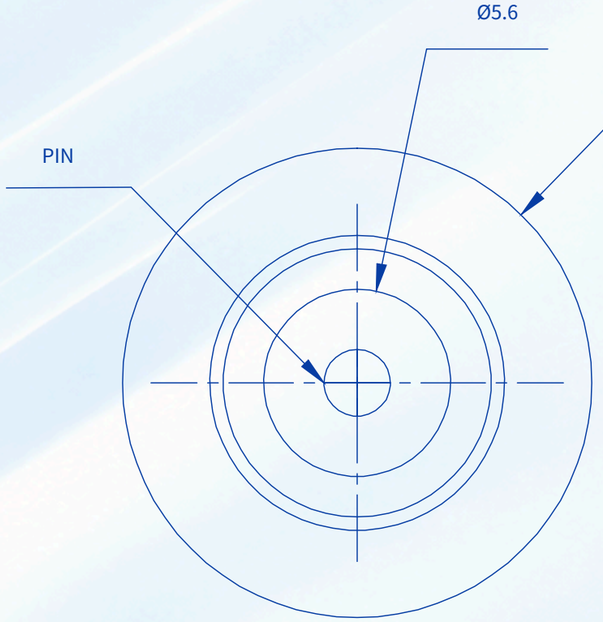


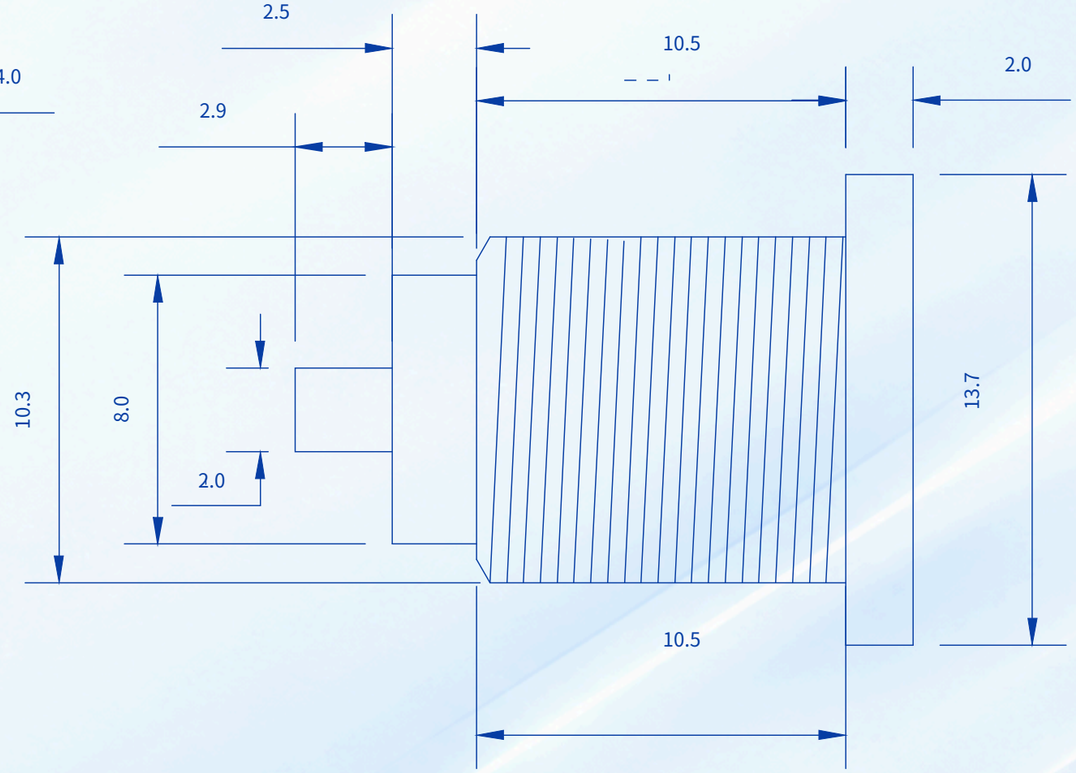

MATERIAL / SPECIFICATION	
Rated Load	DC 30V/0.5A
Contact Resistance	⩽30 mΩ
Insulation Resistance	⩾100MΩ
Withstanding Voltage	AC500V(50Hz)/min
Insertion/Extraction Force	3-20N
Operating Temperature	-30~70°C
Life	5000 cycles
BOM: Round Pin	Qty 1; BRASS; Copper-Tin plated
BOM: Copper Sleeve	Qty 1; BRASS; Copper-Tin plated
BOM: Nut	Qty 1; BRASS; Copper-Tin plated
BOM: Base	Qty 1; PBT

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.20
.X	±0.10
.XX	±0.05
.XXX	±0.02
X°	±5°
.X°	±2°
.XX°	±1°

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	DC Panel Mount Power Jack DC-022A 5.6 mm Opening 2.0/2.5 mm Center Pin						
PART NO.	KS-DC-022A					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1