


RoHS Compliant

REVISION HISTORY				
REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

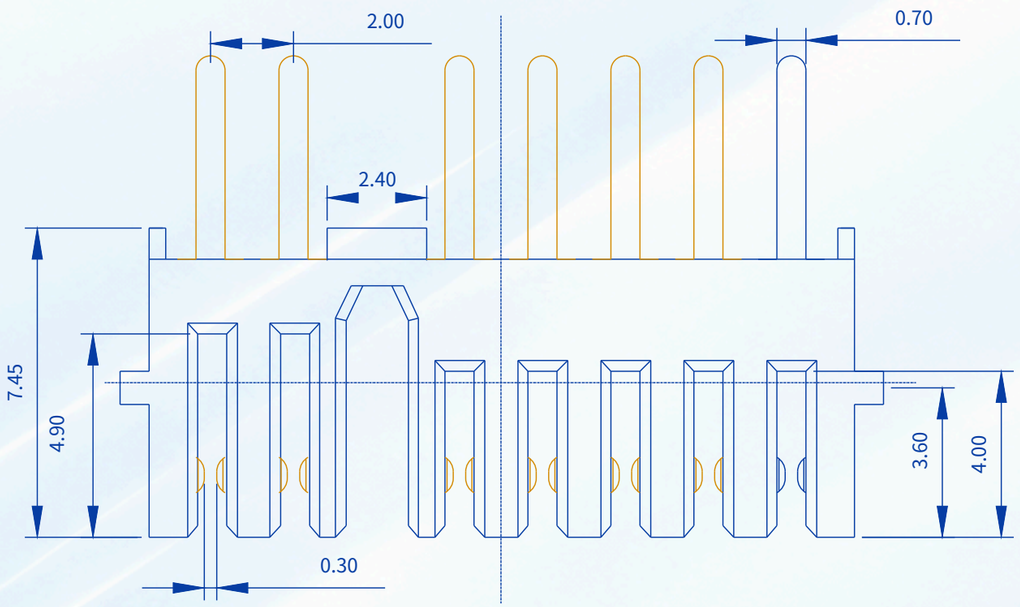

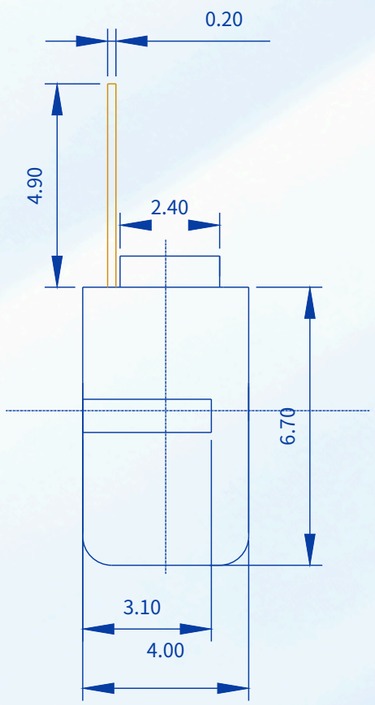


MATERIAL / SPECIFICATION	
Insulator	Nylon 9T (UL94V-0)
Contact	Phosphor Bronze
Contact plated	Gold over Nickel or Tin
Current rating	5A
Instant current	7A
Contact resistance	30mΩ
Insulation resistance	100MΩ
Dielectric voltage	500V
Operating temperature	−40° ~ 105°

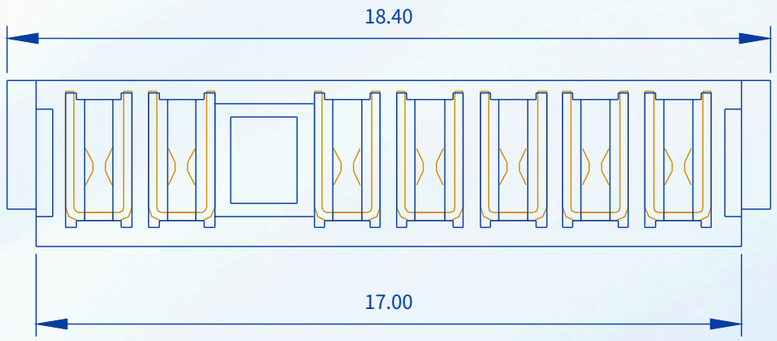

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
X.	±0.20
X.x	±0.10
X.xx	±0.05
ANGULAR	±2°

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Large 2 mm Pitch 7.45 mm Height Through-Hole Female Blade Battery Connector (7 Pin) Keyed						
PART NO.	KS-BL200-07F-D745K					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1