


RoHS Compliant


REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

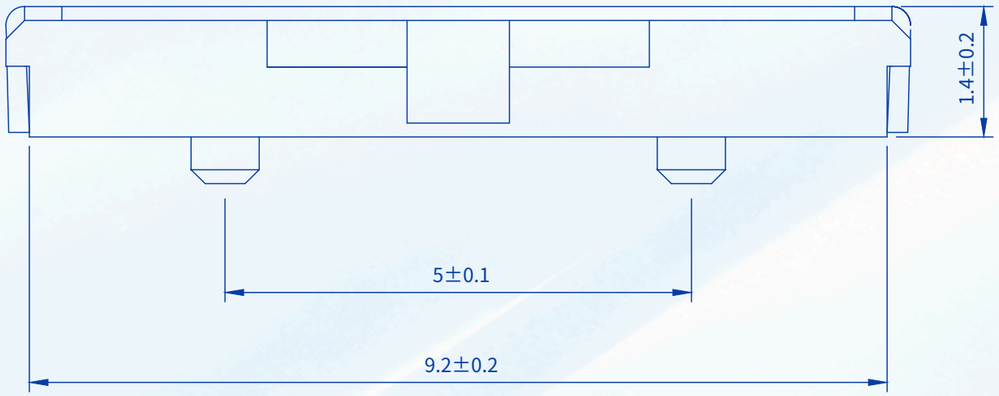

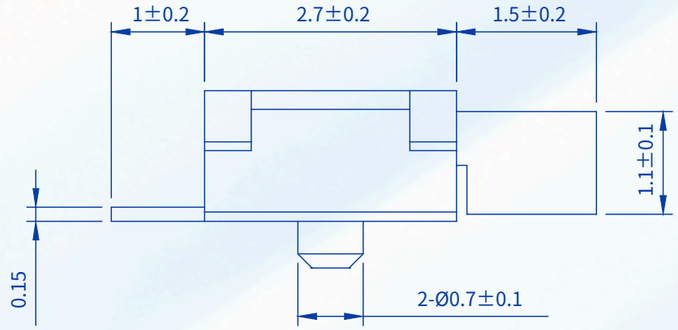

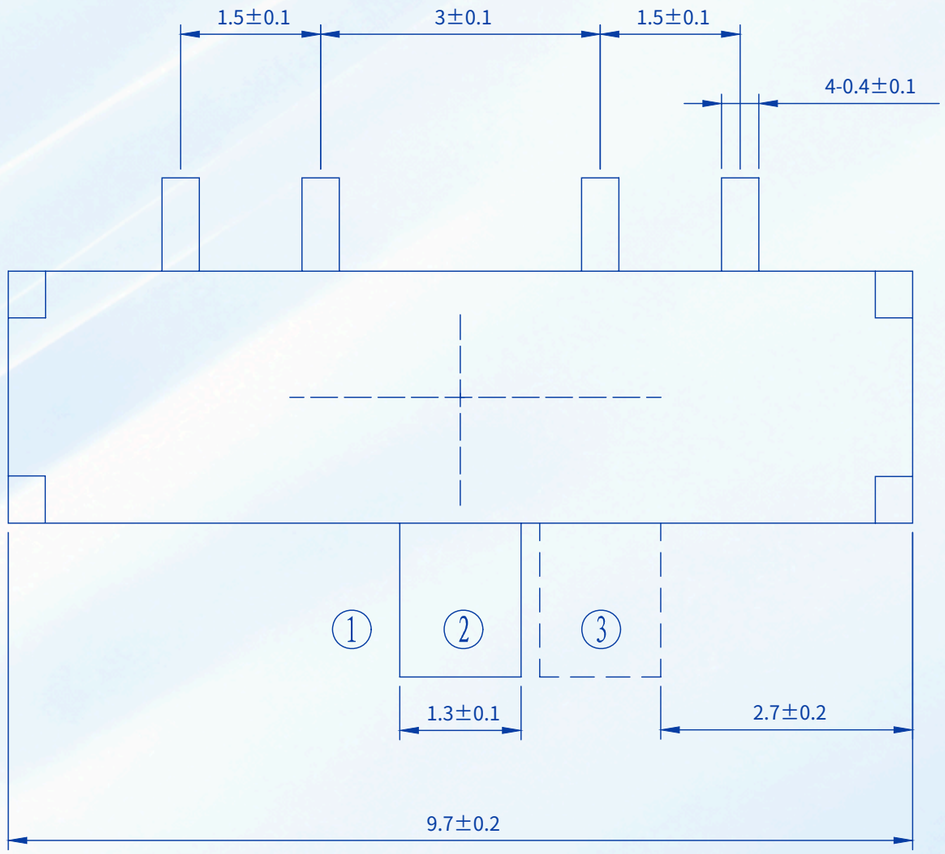

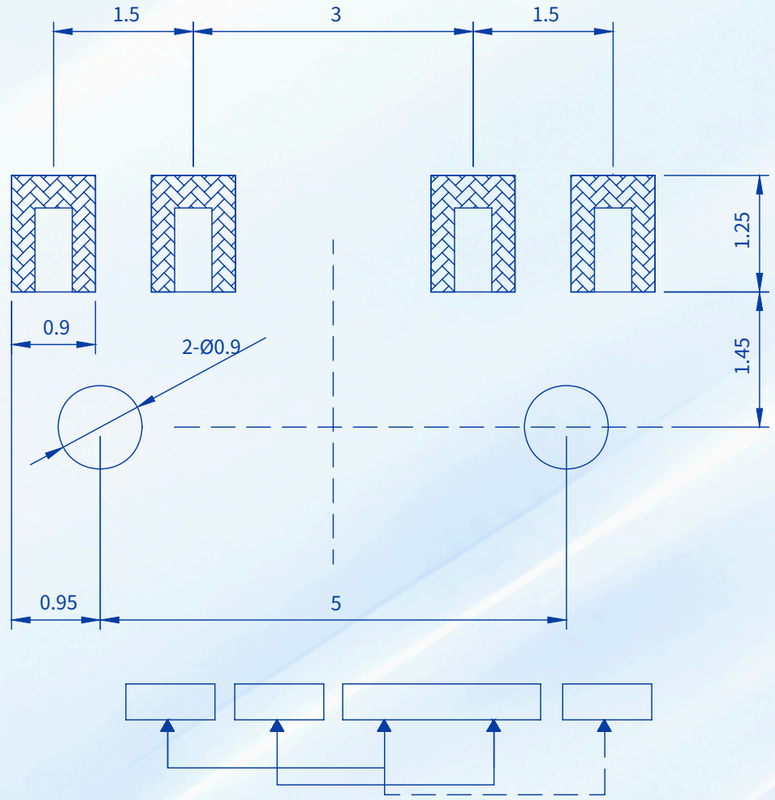

MATERIAL / SPECIFICATION	
Rated Load	DC12V 0.1A
Insulation Resistance	⩾50 MΩ
Dielectric Strength	AC250V (50Hz) 1min
Operating Temperature	-10~+50°C
Relative Humidity	(40°C) ⩽80%
Contact Resistance	⩽100 mΩ
Operating Force	190gf±50gf
Heat Resistance	⩽250°
Life	⩽10000 cycles
BOM: Spring Piece	Qty 1; Stainless Steel; Gray
BOM: Contact Spring	Qty 1; Silver-Clad Copper; Silver White
BOM: Cover	Qty 1; Phosphor Bronze; Silver White
BOM: Base	Qty 1; LCP & Phosphor Bronze; Black & Silver Plated
BOM: Handle	Qty 1; Imported Reinforced Nylon; Black (White)

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	
		APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 4 Pin SMD With Locating Post							
PART NO.	KS-SS-MSK-02A						REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1	