

RoHS Compliant


REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

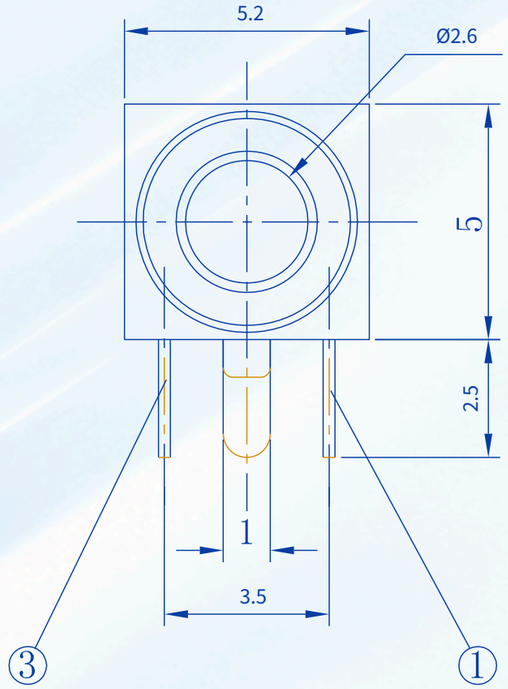

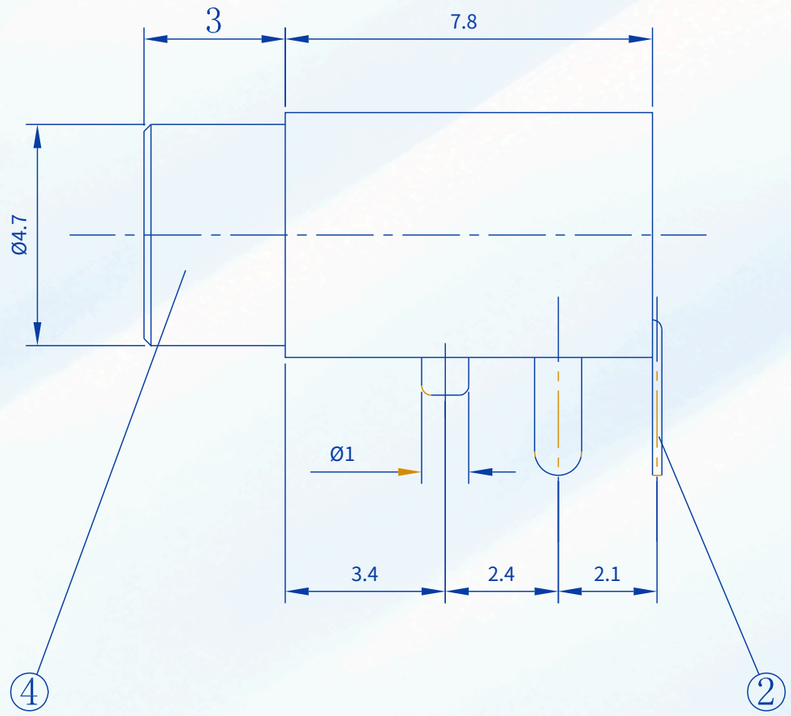

P.C.B LAYOUT

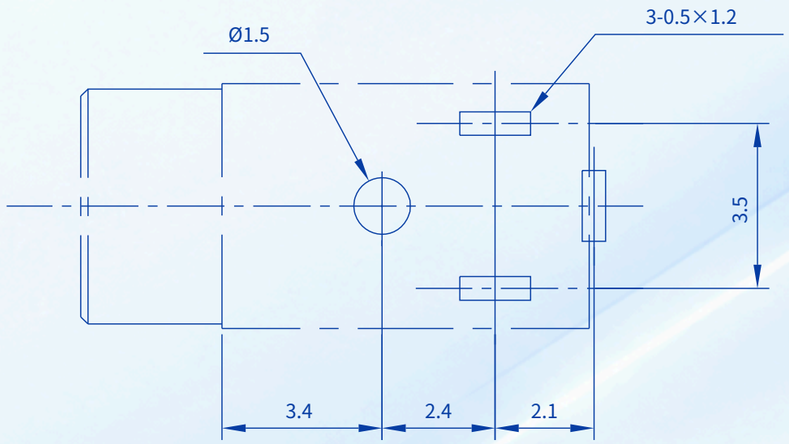


MATERIAL / SPECIFICATION	
Rated Load	30V, 0.2A
Contact Resistance	⩽20 mΩ
Insulation Resistance	⩾100 MΩ
Withstanding Voltage	AC250V(50Hz) min
Insertion/Extraction Force	3-10N
Life	5,000 cycles
Appearance	Good appearance; no rust, cracks or poor plating
BOM: Base	NYLON; Qty 1; (Black)
BOM: Right Leg	TIN BRONZE STRIP T=0.25; Qty 1; Silver plated
BOM: Middle Leg	TIN BRONZE STRIP T=0.25; Qty 1; Silver plated
BOM: Left Leg	TIN BRONZE STRIP T=0.25; Qty 1; Silver plated

SCHEMATIC



GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
0.0-10.0mm	±0.10mm
10.0-20.0mm	±0.15mm
20.0-50.0mm	±0.20mm

PROJECTION



THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	2.5 mm Through-Hole Audio Jack (3 Pin) PJ-211						
PART NO.	KS-PJ-211					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1