





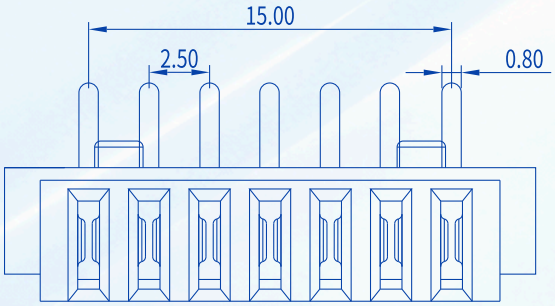

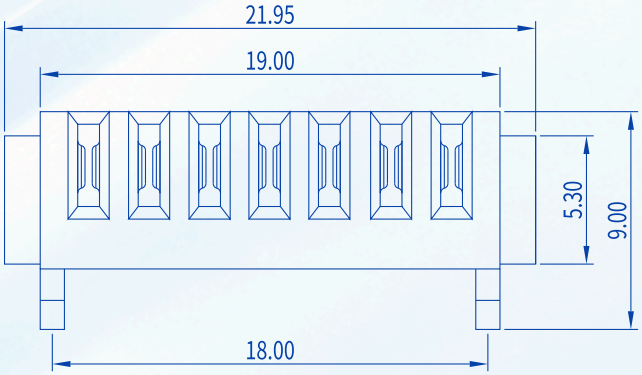

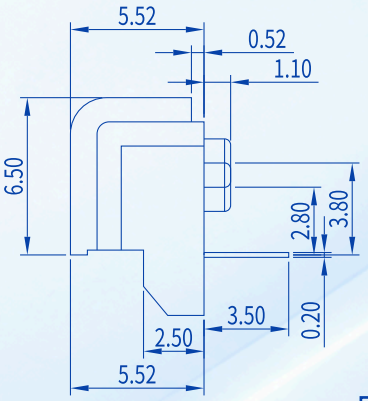

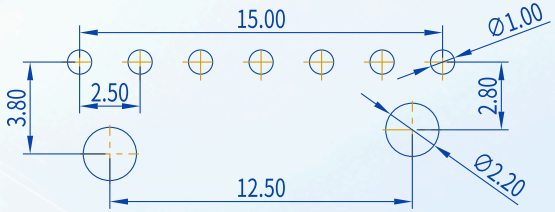

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Current rating:7A

instant CURRENT:10A

Contact Resistance:30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:500V

Operdting Temperature:-40°~105°

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.20 ANGULAR ±2° X.X ±0.15 X.XX ±0.10	DESIGN		DATE	TITLE: 电池连接器
	APPROVED		DATE	
	MODEL: B04F-7P-L2方柱	REV:	SCALE:	UNIT: mm
		SIZE: A4	SHEET: 1/1	