

RoHS Compliant

REVISION HISTORY


REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

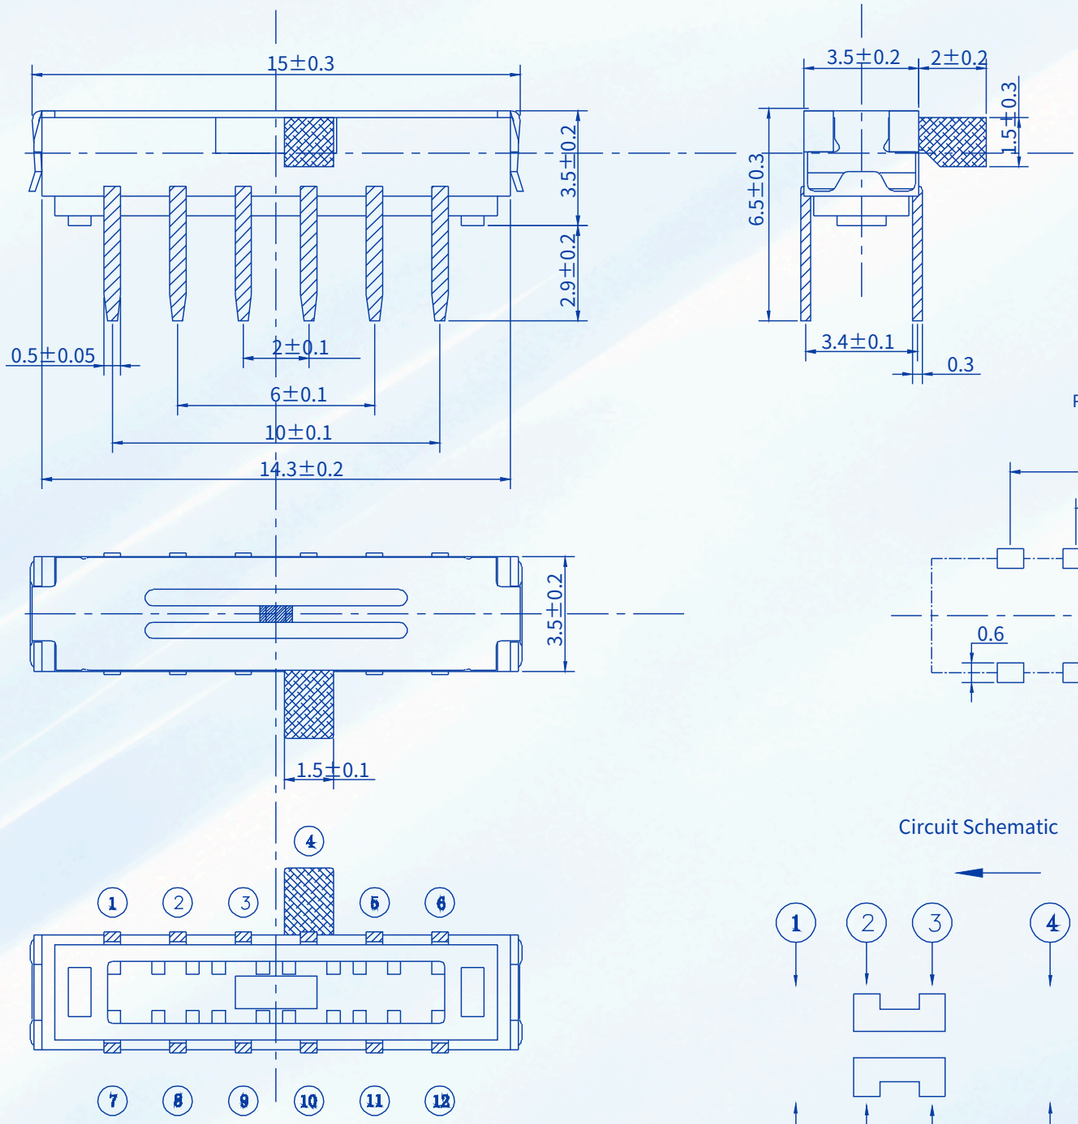


PCB Board Position Dimensions

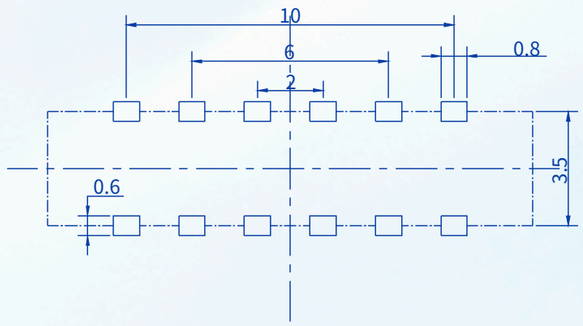

Circuit Schematic

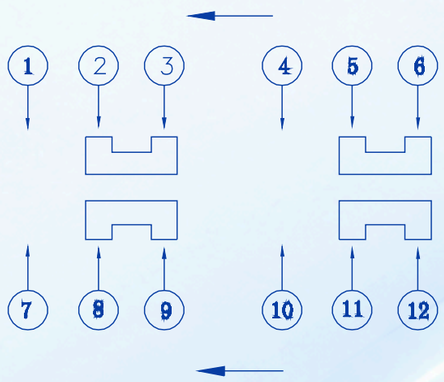

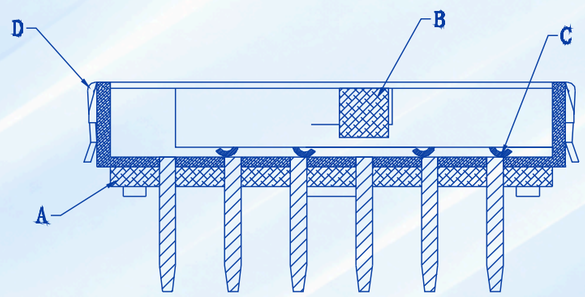

MATERIAL / SPECIFICATION	
Rated Range	50mA DC12V
Insulation Resistance	100 MΩ min (DC100V)
Dielectric Strength	AC100V (50/60Hz for 1 minute)
Mechanical Life	10,000 cycles
Operating Temperature	-10~+60°C
Operating Force	200±100gf
Material Property	Environmentally Friendly (SGS)
BOM: Cover	Qty 1; Stainless Steel; Silver White
BOM: Contact Spring	Qty 4; Phosphor Bronze; Silver White Inlaid Silver
BOM: Button	Qty 1; Reinforced Nylon; Black
BOM: Base	Qty 1; LCP & Brass; Black & Silver Plated

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	
		APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 12 Pin Horizontal Through-Hole						
PART NO.	KS-SS-SK-15C					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1