


RoHS Compliant


| REVISION HISTORY | | | | |
|---|---|---|---|---|
| REV. | DESCRIPTION | DRAWN BY | CHECKED BY | APPROVED BY |
| A0 | INITIAL RELEASE | KANGSHENG | | |

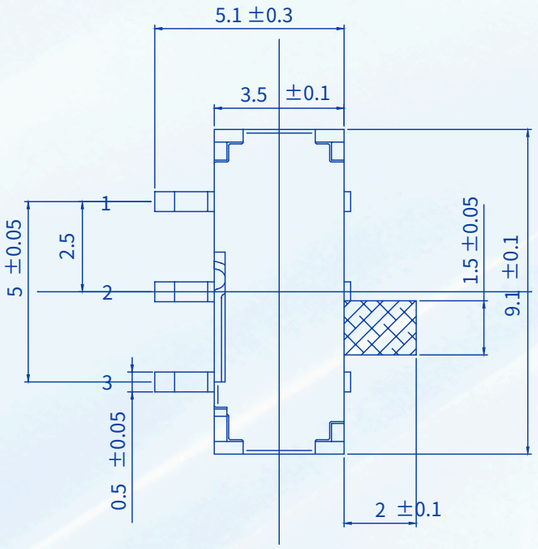


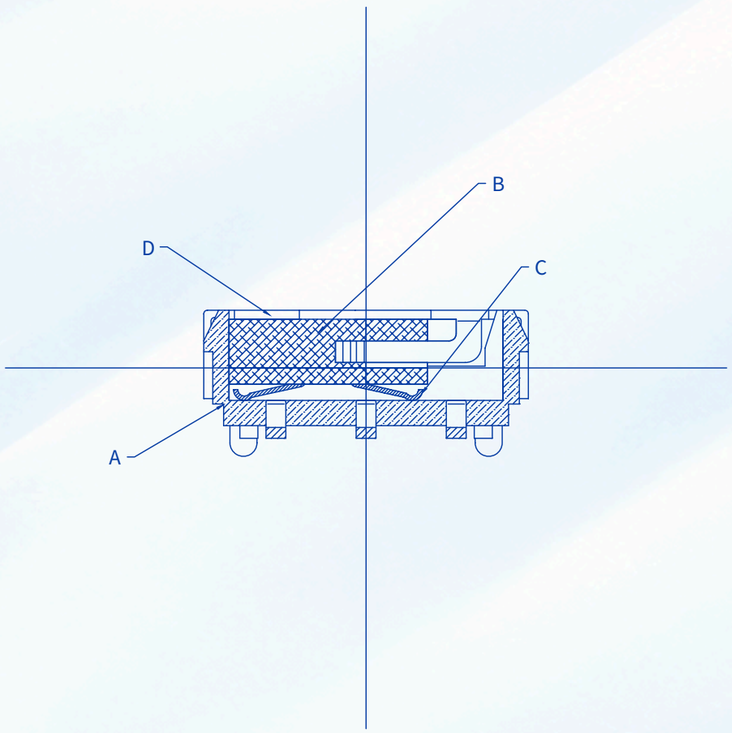


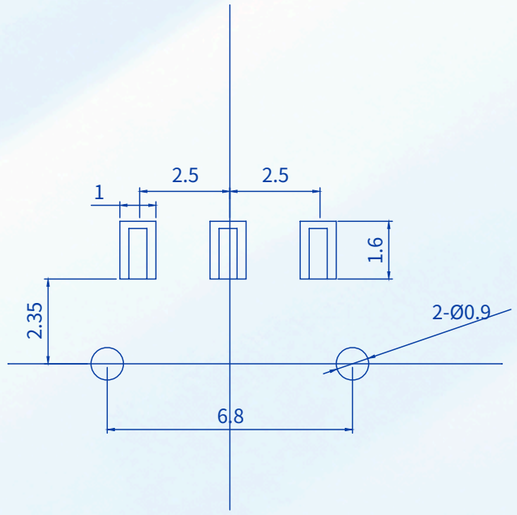

| MATERIAL / SPECIFICATION | |
|---|---|
| Rated Range | 50mA DC12V |
| Insulation Resistance | 100 MΩ min (DC100V) |
| Dielectric Strength | AC100V (50/60Hz for 1 minute) |
| Mechanical Life | 10,000 cycles |
| Operating Temperature | -10~+60°C |
| Operating Force | 200±100gf |
| Material Property | Environmentally Friendly (SGS) |
| BOM: Cover | Qty 1; Imported Stainless Steel; Silver White |
| BOM: Contact Spring | Qty 1; Imported Silver-Clad Phosphor Bronze; Silver White Inlaid Silver |
| BOM: Button | Qty 1; Imported Reinforced Nylon; Black |
| BOM: Base | Qty 1; PPA & Brass; Black & Silver Plated |

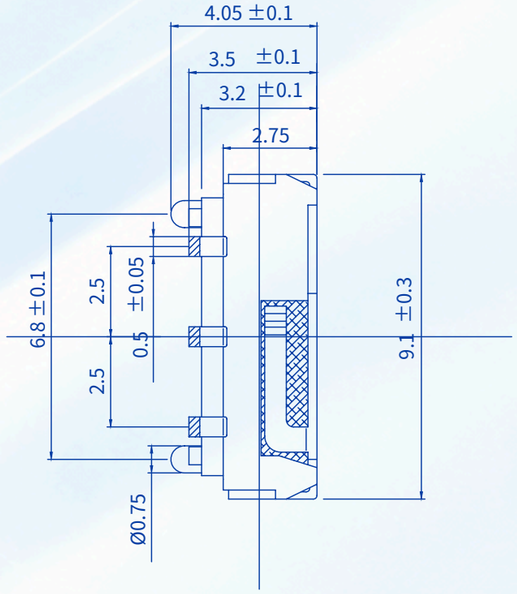

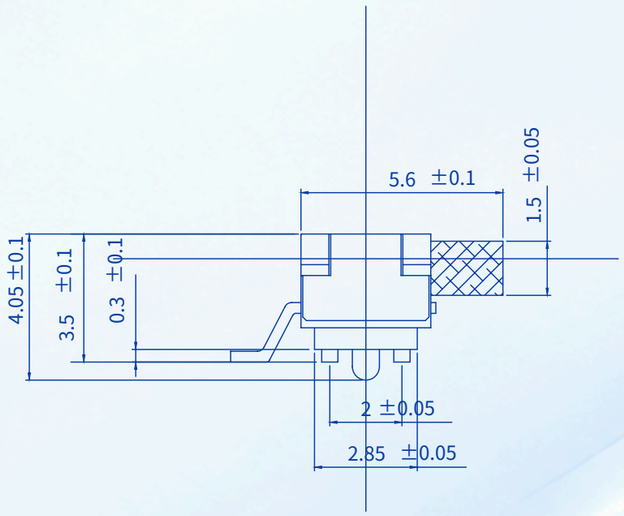
| | | | |
|---|---|---|---|
| GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED) | PROJECTION | DRAWN BY | KANGSHENG |
| | THIRD ANGLE PROJECTION | CHECKED BY | |
| | | APPROVED BY | |

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| PRODUCT NAME | Slide Switch 3 Pin Side-Actuated SMD With Locating Post | | | | | | | |
| PART NO. | KS-SS-9135-SPR | | | | | | REV. | A0 |
| SCALE | NTS | UNIT | mm | SIZE | A3 | SHEET | 1/1 | |