


RoHS Compliant


REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

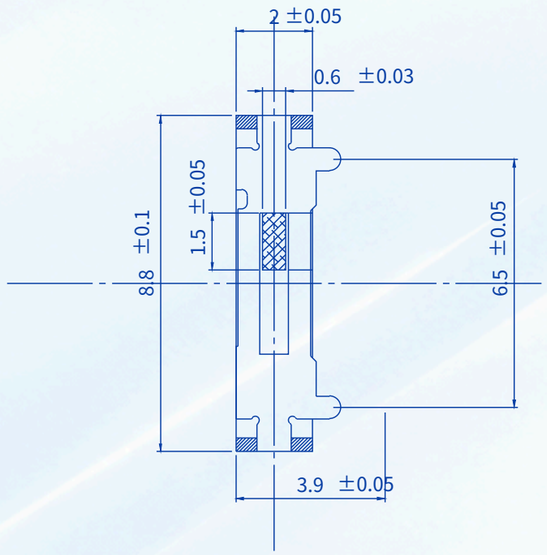


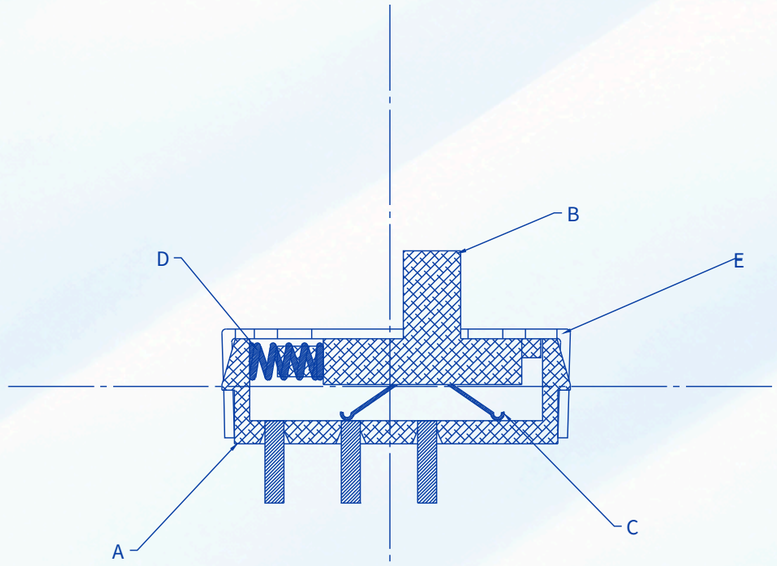


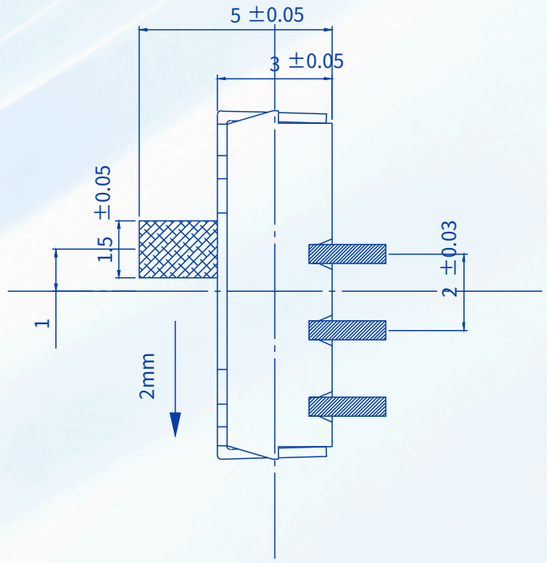

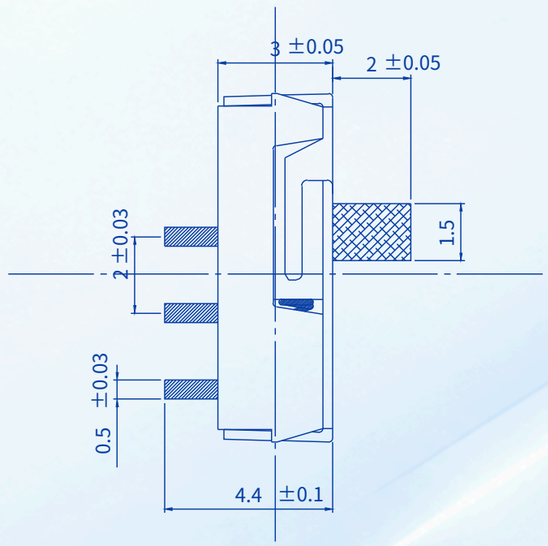

MATERIAL / SPECIFICATION	
Rated Range	50mA DC12V
Insulation Resistance	100 MΩ min (DC100V)
Dielectric Strength	AC100V (50/60Hz for 1 minute)
Mechanical Life	10,000 cycles
Operating Temperature	-10~+60°C
Operating Force	180±50gf
Material Property	Environmentally Friendly (SGS)
BOM: Cover	Qty 1; Stainless Steel; Silver White
BOM: Spring	Qty 1; Stainless Steel; Silver White
BOM: Contact Spring	Qty 1; Silver-Clad Copper; Silver White Inlaid Silver
BOM: Handle	Qty 1; High-Temp Nylon; Black
BOM: Base	Qty 1; LCP; Gray-Black & Silver Plated

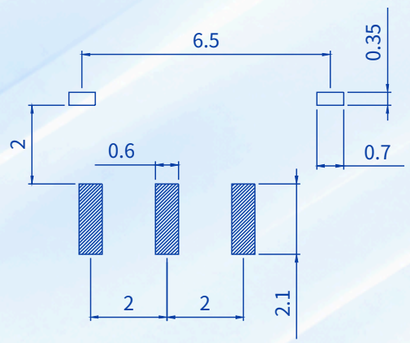

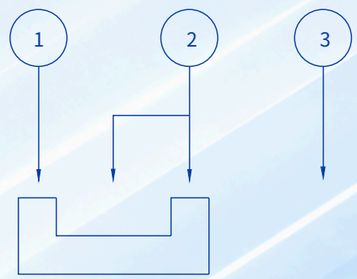

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)	PROJECTION	DRAWN BY	KANGSHENG
	THIRD ANGLE PROJECTION	CHECKED BY	
		APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 3 Pin Side-Actuated SMD		
PART NO.	KS-SS-SK-18-01	REV.	A0

SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1