


RoHS Compliant

REVISION HISTORY

REV.	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVED BY
A0	INITIAL RELEASE	KANGSHENG		

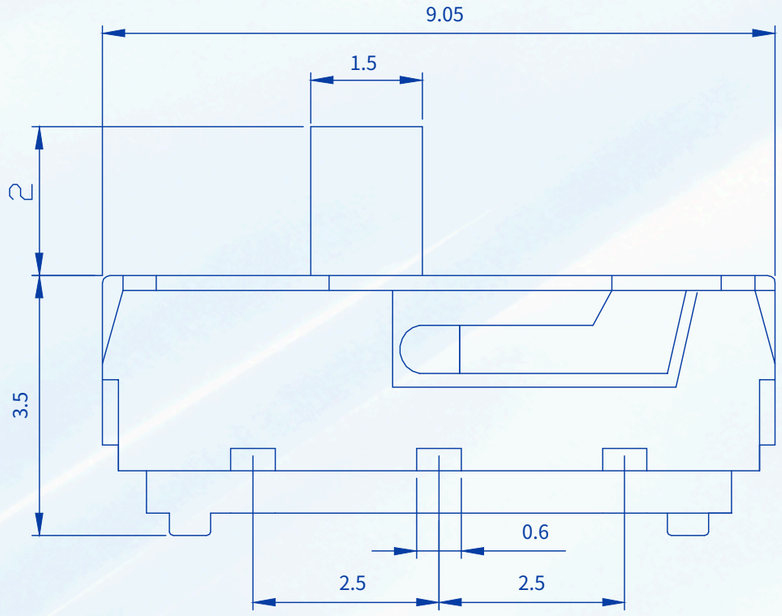

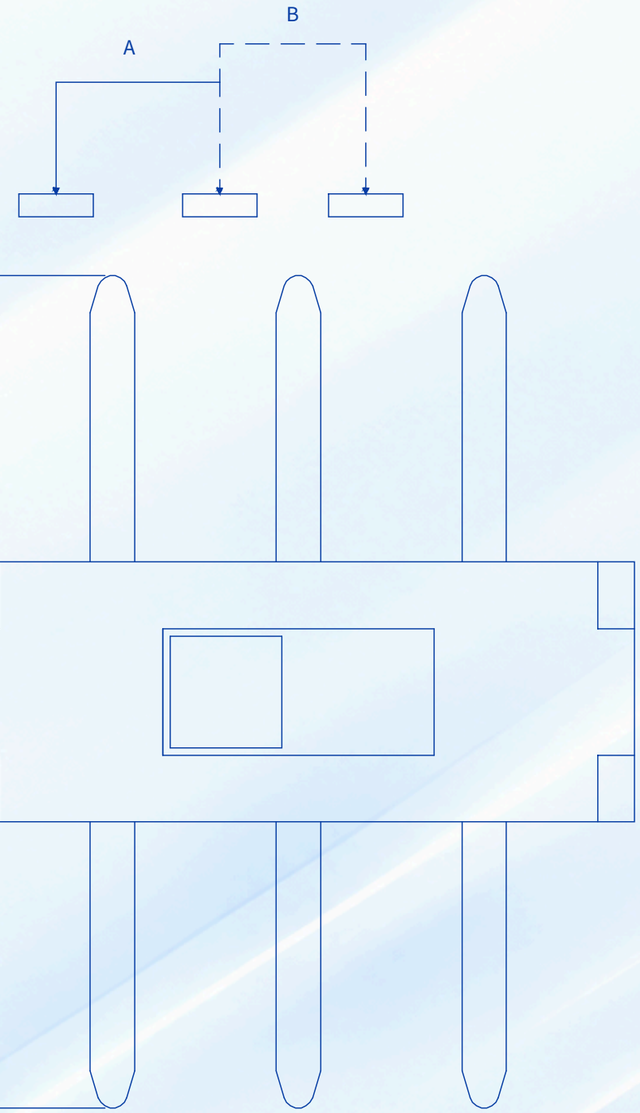

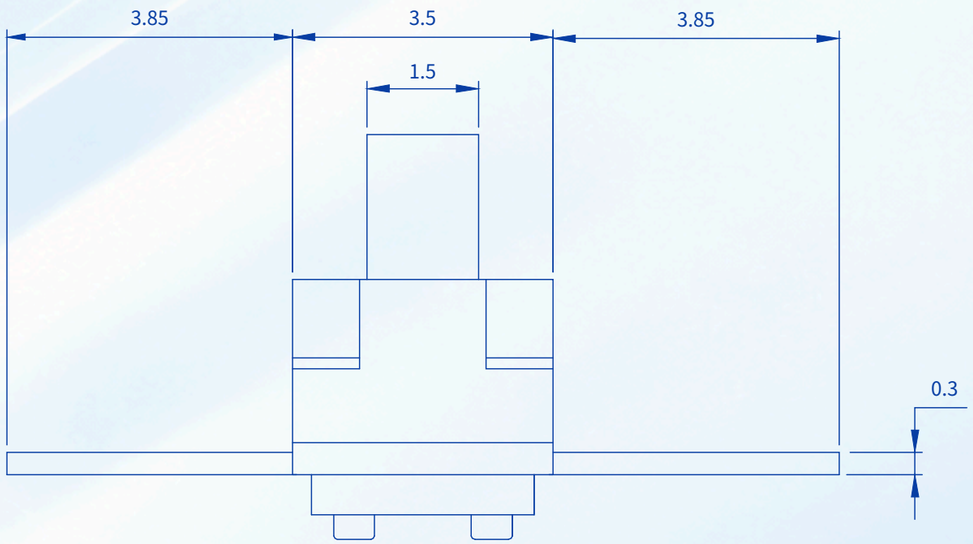

MATERIAL / SPECIFICATION	
Rated Load	DC12V 0.1A
Insulation Resistance	⩾100 MΩ
Dielectric Strength	AC250V (50Hz) 1min
Ambient Temperature	-25°C~+70°C
Relative Humidity	(40°C) ⩽95%
Contact Resistance	⩽50 mΩ
Operating Force	200gf±30gf
Temperature Resistance	250°C
Life	10,000 cycles
BOM: Contact Spring	Qty 1; Beryllium Bronze; Silver White
BOM: Cover	Qty 1; Stainless Steel; Gray
BOM: Base	Qty 1; Imported Reinforced Nylon; Black & Silver Plated
BOM: Handle	Qty 1; Imported Reinforced Nylon; Black

GENERAL TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

PROJECTION

THIRD ANGLE PROJECTION

DRAWN BY	KANGSHENG
CHECKED BY	
APPROVED BY	

深圳市康生电子科技有限公司
Shenzhen Kangsheng Electronic Technology Co., Ltd.

PRODUCT NAME	Slide Switch 6 Pin Through-Hole Long Lever 9.05×3.5						
PART NO.	KS-SS-9.05X3.5					REV.	A0
SCALE	NTS	UNIT	mm	SIZE	A3	SHEET	1/1